

AI-based defect detection that exceeds the ability of expert inspectors



A better option for inspections requiring specialist knowledge and high sensitivity

Meeting sensory inspection needs amid a shortage of skilled inspectors

Skilled inspectors are hard to come by these days, and labor costs have risen sharply. Manufacturers are now facing intense pressure to automate processes that rely on the senses of experienced human workers. Particularly when it comes to visual inspection, it's important to reliably identify subtle defects even on flexible lines producing a wide range of items. Traditionally, the knowledge and sensitivity of technicians with long-term experience has been key. However, artificial intelligence is now reaching the stage where it can recognize object features as well as humans and automatically learn criteria. While a lot of AI solutions faces challenges with large amounts of image data, specialized hardware and engineering expertise, Omron is making great progress in enabling its widespread use.



AI reproduces human experience and sensibility

To solve these challenges, Omron developed new defect detection AI that reproduces the techniques of skilled inspectors. This AI is now part of the FH Vision System.

Barriers to automation

1

Inspection criteria dependent on workers' expertise

2

Defect detection dependent on human senses

3

Shortage of engineers who examine automation

AI identifies good products as well as experienced inspectors

AI captures defects with human-like sensitivity

No special environment is required

AI identifies good products as well as experienced inspectors


Sensory inspection requires a certain tolerance for variations that don't pass a certain threshold. Determining what variations are acceptable is a key capability of expert inspectors and poses a challenge for automated inspection systems.



The FH Series can determine acceptable variation tolerances.

AI Fine Matching

Omron's AI Fine Matching tool learns from the image data of non-defective products to quickly acquire the "expertise" that inspectors develop over the course of many years. This reduces costs and boosts productivity through automation.

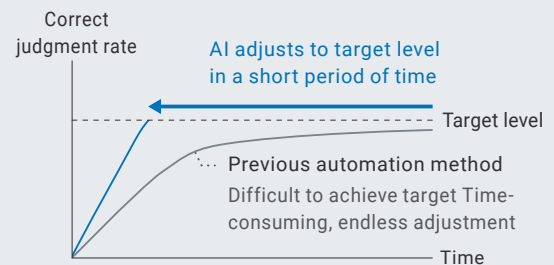

Target inspection level: Reduce over-detection

| | | Difference image | |
|--|----------------|---|---|
| | | Previous automation method | AI automation method |
| Contamination inspection of LED modules | Captured image | Detects position differences, not foreign materials, as defects | Detects foreign materials only and ignores position differences |
| Defective product With foreign materials | | Overdetection | Detects foreign material only |
| Non-defective product Position difference of die | | Overdetection | Judges as non-defective product |
| Non-defective product Position difference and light variation of surrounding part | | Overdetection | Judges as non-defective product |

AI Fine Matching

AI reduces overdetection

AI Fine Matching identifies a feature that is not included in good products as a defect.

AI learns images of good products with variations, and generates an AI model.

Every time an inspection is carried out, AI reconstructs a model that is presumed to be a good product.

AI extracts a difference between the reconstructed good product image and a captured image to identify a defect, reducing overdetection.

Captured image



Shifted to upper right




Shifted to lower left

AI model



Reconstructed good product image



Reconstructs a good product image considering different views of holes

AI makes it easy to avoid overdetection

PATENT PENDING *1

Three quick steps on the settings screen guide the user through the process of creating the good product model with the minimum number of images.

1 Prepare images

Although standard AI processing requires a huge number of images for learning, the FH Series requires only 100 to 200 images.

Good product image




Defective product image



2 Create model

The system suggests images to learn, helping to complete the good product model.

AI makes it easy



AI model

3 Check results

Test is automatically performed using images prepared in Step 1. You don't need to adjust parameters for differential inspections.

AI makes it easy



Correlation score

Image A:10

Image B:150

⋮

When a good product is judged as defective, AI gives each image a correlation score to visualize the degree of overdetection. This facilitates selecting images that need to be learned to reduce overdetection.

*1. "Patent pending" means that we applied for a patent in Japan, and "Patented" means that we obtained a patent in Japan. (as of May 2022)

AI captures defects with human-like sensitivity

Defect detection tasks that rely on human sensibility are a challenge to automate. Fortunately, powerful new AI technology can match the skills and capabilities of experienced inspectors.



Automating human vision-based inspection with the FH Series

AI Scratch Detect Filter ^{*1}

The latest capabilities of the FH Vision System include a new AI-based image filter that reproduces the technique that skilled inspectors use to identify a defect on any product background. Scratches and blemishes that were once difficult to capture can now be identified even without the use of samples or adjustment.



Captured image



Previous detection image
Cannot separate a scratch from noise



Detection image
Can detect a scratch only

AI

*1. The FH-UMAI1 Scratch Detect AI Software Installer is required to use AI Scratch Detect Filter.

AI Scratch Detect Filter


AI reproduces human expertise through learned criteria

The AI Scratch Defect Filter learns by means of images in which human inspectors noticed defects. Whereas previous inspection methods found the unexpected size, shape or color of a particular defect to be a barrier to automation, AI successfully extracts abnormalities by judging their features without definition. The learned data facilitates defect detection on processed surfaces and other uneven backgrounds that previously posed an insurmountable challenge.

Captured image



Extracted scratch
(internal image)



Solutions using AI



Watch use case video.
https://www.fa.omron.co.jp/fh_ai_e

AI identifies good products as well as experienced inspectors

Issue


- Uneven colors and dimensional variations within tolerance
- Difficult to identify defects due to complex shapes
- Time-consuming inspection area setting and parameter adjustment for different shapes of many objects

AI Fine Matching

- Reliable detection by learning variations in colors and dimensions of good products
- Identification of defects in complex-shaped parts
- Quick setting for many objects with different shapes by simply enclosing inspection areas

Print inspection for product labels

Variations in darkness, thickness, and positions of printed characters are acceptable, and only defects such as chipped characters are detected. The inspection area is set to the entire label.



Chipped character





Ink splatter

Chip and contamination inspection for electronic parts


Minor dimensional differences are permitted, and only defects are detected in complex-shaped parts. The inspection area is set to the entire part surface.



Chipped resin




Foreign material





Contamination and shape inspection for resin molded parts

Efficient learning of many objects with different shapes enables quick setting of conditions for extracting only defects from complex shapes. The inspection area is set according to the shape of the molded part.



Shape A: foreign material



Shape B: foreign material and deformation




AI captures defects with human-like sensitivity

Issue


- Filters and parameters are combined and adjusted to detect low-contrast defects.
- Low-contrast defects cannot be detected.

AI Scratch Detect Filter


- Regardless of material type, color, or size, defects can be extracted reliably without previously required definition and adjustment.



Scratch on sandblasted metal



Scratch on resin products



Black scratch on hairline finish



White scratch on shaded hairline finish



No special environment is required

With the FH Series, there's no need for high-end hardware or specialized engineers who can configure the system to suit your needs. Our general-purpose vision system makes it easier than ever to introduce AI into production sites.

Vision controller with AI functionality

Artificial intelligence has traditionally required a high-end environment, but our lightweight creative solution comes in the form of user-friendly processing items that have been integrated into our popular FH Series hardware.

No special hardware for AI required

It used to be difficult to introduce AI technology to many inspection processes because of its hardware requirements. The FH Series does not require special hardware, facilitating the introduction of this technology. The FH Series does not require special hardware, facilitating introduction.

No AI engineer required

In order to reliably use AI technology in processes, the engineer used to have not only image processing skills but also programming and maintenance skills. With the FH Series, however, you can use AI technology just like operating a standard vision sensor. No dedicated AI engineer is required.


FH-5□□
High-speed,
Large-capacity Controller
with AI



Intel® Core™ i7 processor



Outstanding processing speed
Ultra-high-speed CPU Large-capacity RAM



4 times faster*1 than our previous models

10 times larger*1 than our previous models

1 Machine control network
Cycle: 125 μs




2 Data output
High-speed interface: USB 3.0

*1. The FH-555□ Controller is compared with the FH-3050 Controller.

High-resolution cameras

We offer a range of cameras that can capture high-resolution images suitable for sensory inspection at high speeds.

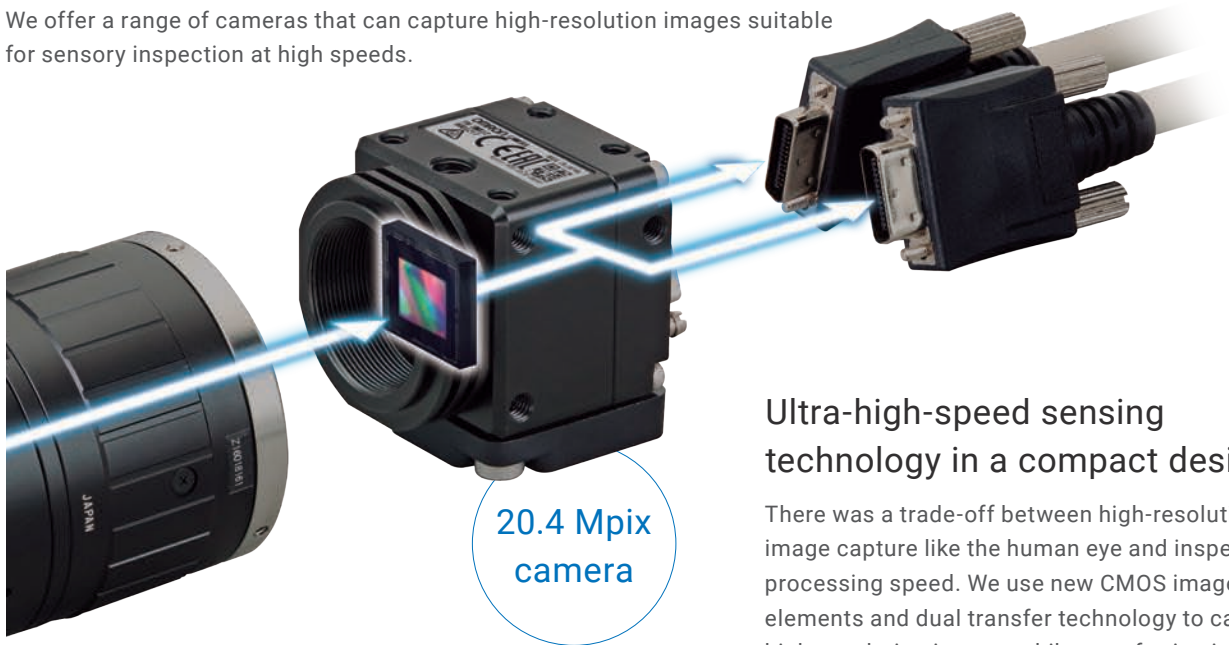

Ultra-high-speed sensing technology in a compact design


There was a trade-off between high-resolution image capture like the human eye and inspection processing speed. We use new CMOS image elements and dual transfer technology to capture high-resolution images while transferring images at high speeds. This facilitates applications that previously required multiple cameras or a mechanism to move a camera.

MDMC light with flexible lighting patterns

This light can be adjusted to defects by combining the illumination colors and angles like humans do. Even if new objects or inspection items are added after installation, there is no need to add or change the light—just change the illumination pattern. The illumination patterns can be registered as settings, facilitating duplicating production lines.

Illumination structure

You can choose the best pattern by combining illumination directions x full color RGB x 128 brightness levels of 13 blocks.

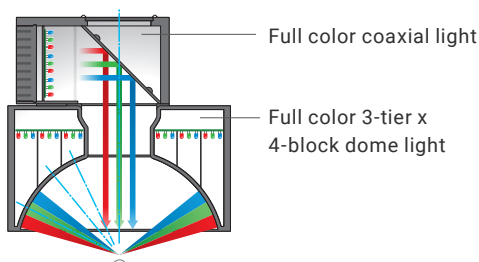

*2. MDMC...Multi-Direction Multi-Color




Software for flexible automation

Flexible image capture



Multi-Trigger Imaging captures long objects at high speeds

The Multi-Trigger Imaging function can capture images and process them in parallel, leveraging the speed of the multi-core processor to capture long objects at high speeds.

Conventional vision sensor



FH Series

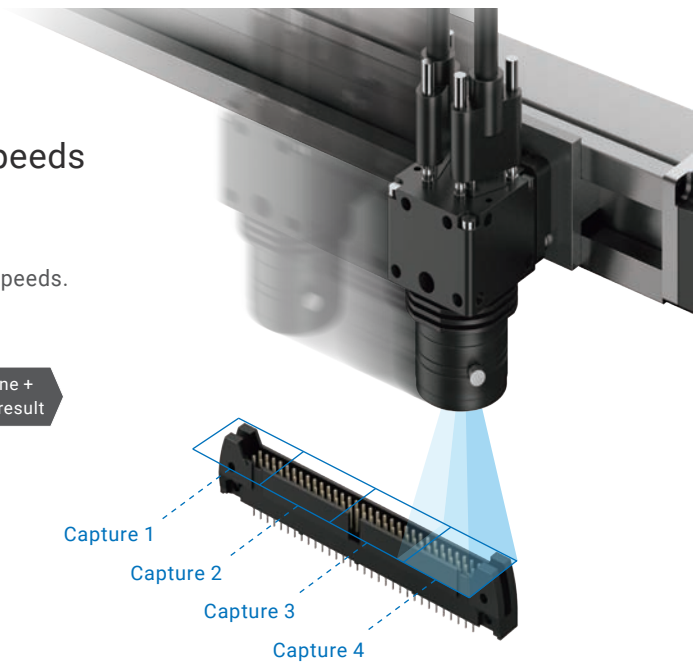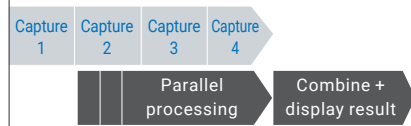


Camera Image Input HDR optimizes contrast

Camera Image Input HDR helps create optimized HDR images under variable ambient conditions. Once you specify the optimum area to capture on the image, the FH Series automatically adjusts the shutter speed while capturing images and combining the images.

Adjusts brightness to suit your specified area


Optimized for the entire field of view

While the contrast around the pins is low, reduced reflection enables capturing a clear image of the entire connector.

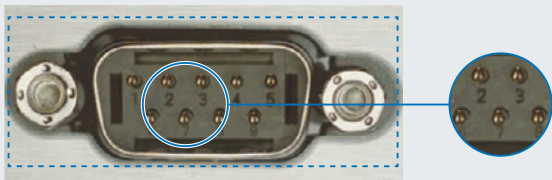


Optimized for the connector

Although reflection occurs at the surrounding part, a clear image of the pins can be captured.

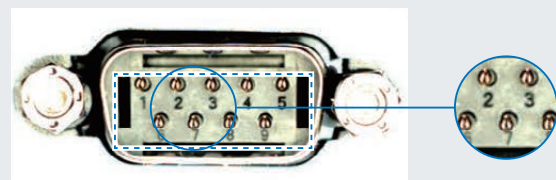

Detects low-contrast defects in high-contrast mode

Previously



Low contrast makes the surface appear uniform.

HDR high-contrast image




Increased contrast reveals many scratches and blemishes.

Parallel processing for different inspections

Multi-Line Random-Trigger inspects at up to four different timings


A single controller can perform inspections at different points at different timings. Controllers installed for each process can be integrated into one, reducing initial costs and saving space.

Packaging process of pharmaceuticals

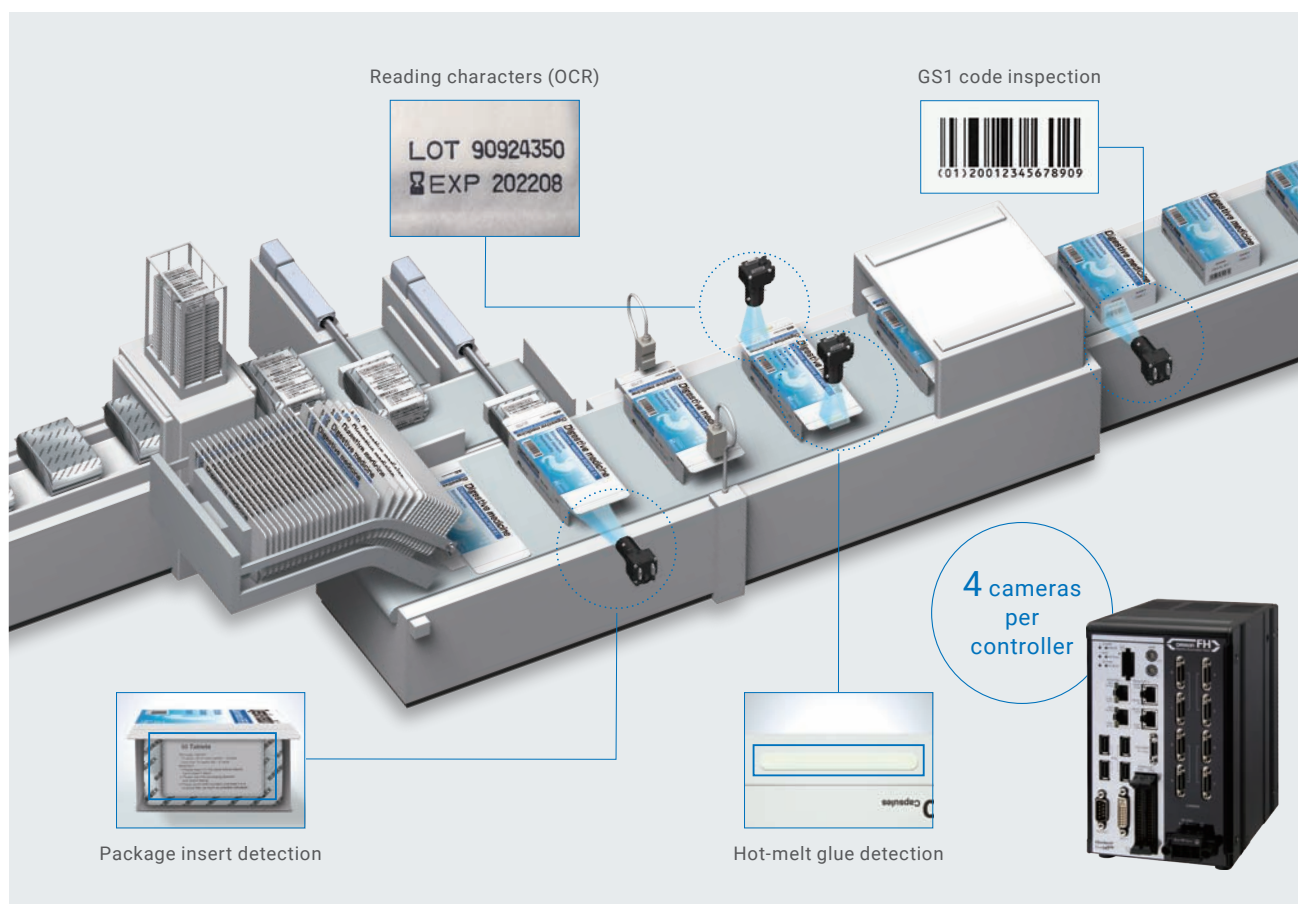


Contamination inspection of beverage containers

A single controller that can control each line saves initial costs and space.

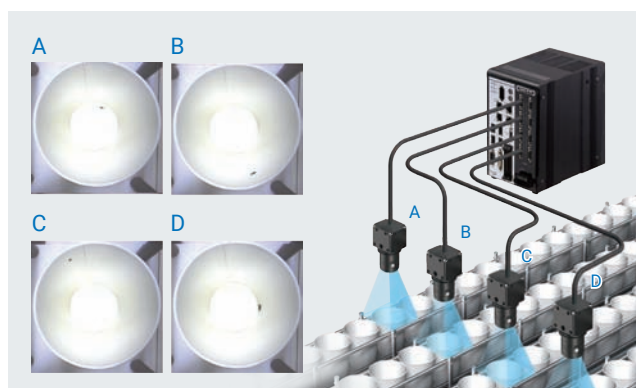

Appearance inspection of rechargeable battery cells

Four cameras can be connected to one controller, enabling simultaneous inspection of dents and scratches from four directions.

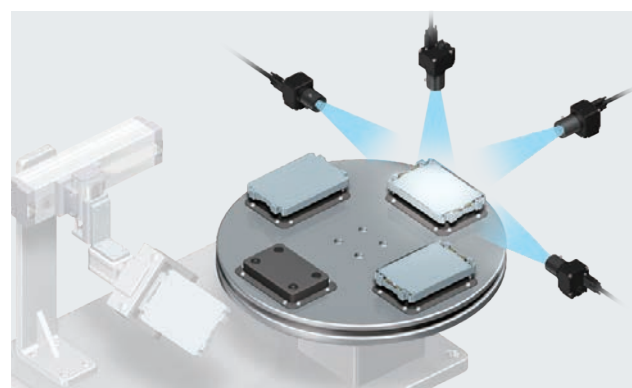


High-speed, high-precision positioning




Shape Search III is robust against shape variations

High-precision and robust positioning is possible even under the adverse conditions, such as changes in environments and materials.

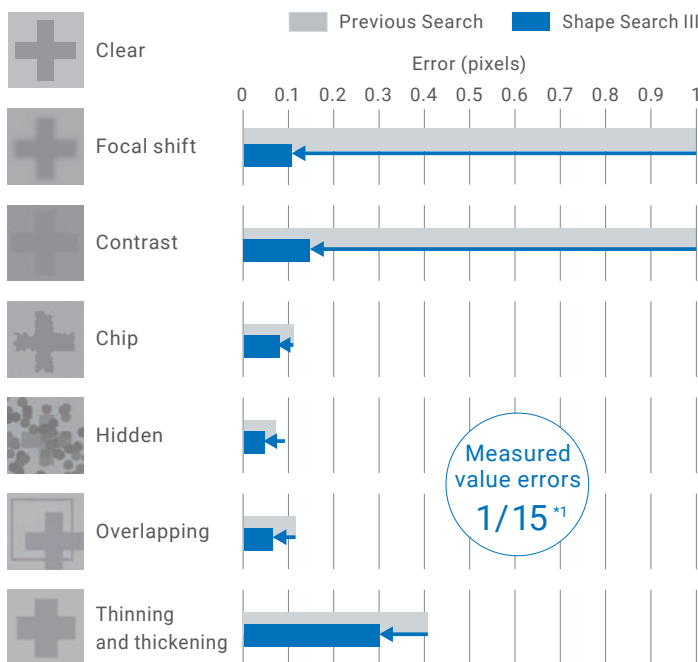

A 20.4 Mpix camera can search a positioning mark in as fast as 12 ms*2, and a 5 Mpix camera, widely used for alignment applications, in as fast as 2 ms.

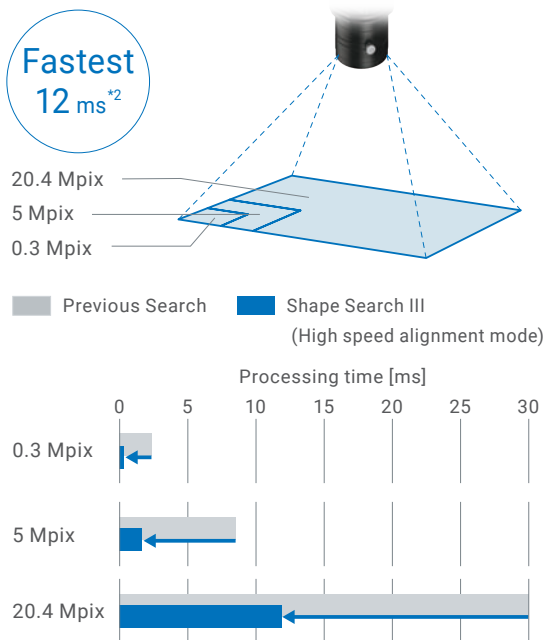


*1. The value measured under our specified conditions is provided for reference. *2. The value measured under our specified conditions is provided for reference. 20.4 Mpix camera.




Circular Scan Edge Position accurately estimates the center and radius of a circle

The new algorithm accurately detects a whole circle from a part of the circle.

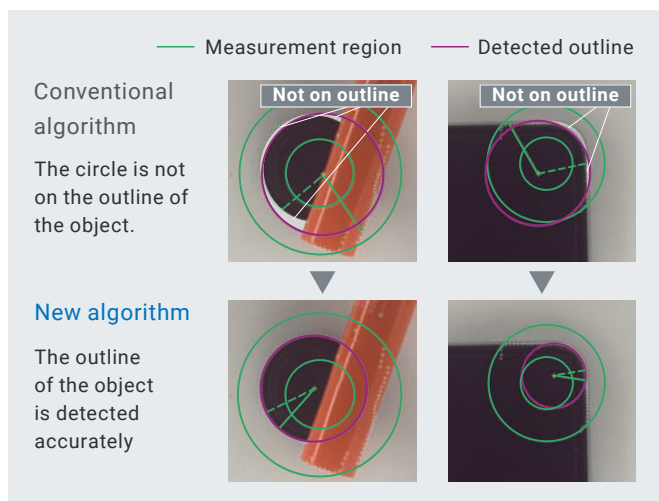

Scan Edge Position removes noise to detect edges


This algorithm accurately estimates lines even when the edges are unclear due to variations in objects or disturbance.

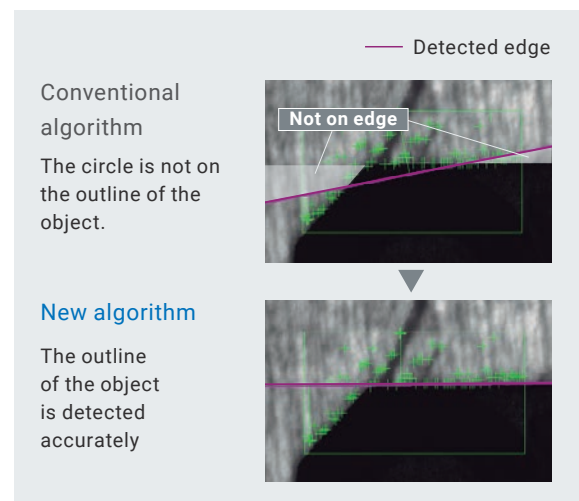



Stage Data calculates for various stages

The popular single axis + θ axis stages as well as UVW stages can be used. The use of the same axis for both handling and positioning simplifies machine configuration.

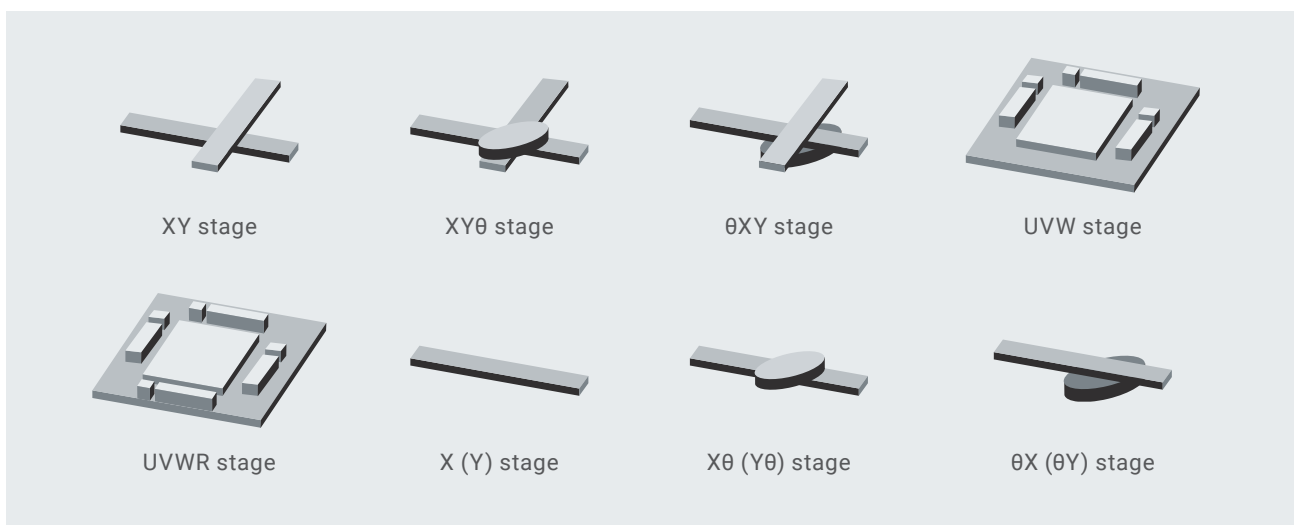


Robot Setting Tool simplifies connecting robots

Communication programs to connect robots from various vendors and FH flowcharts required for robot applications are provided free of charge. You can quickly set up robot vision applications.

Applications

Pick




Offset compensation




Place



Combination




Simple set-up steps

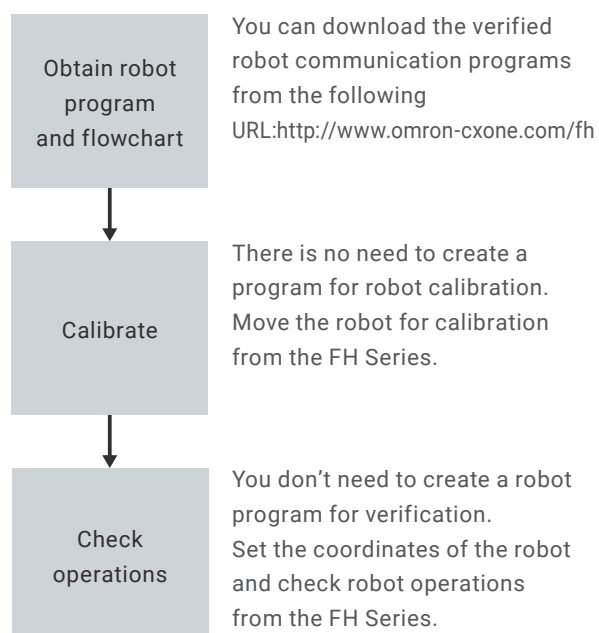

Unique identification and quality control

Unique ID associated with inspection image and result

The FH Series can associate a unique ID with the inspection image and result, and then output them to the host device. You can immediately find required inspection images and quickly identify causes of fails.

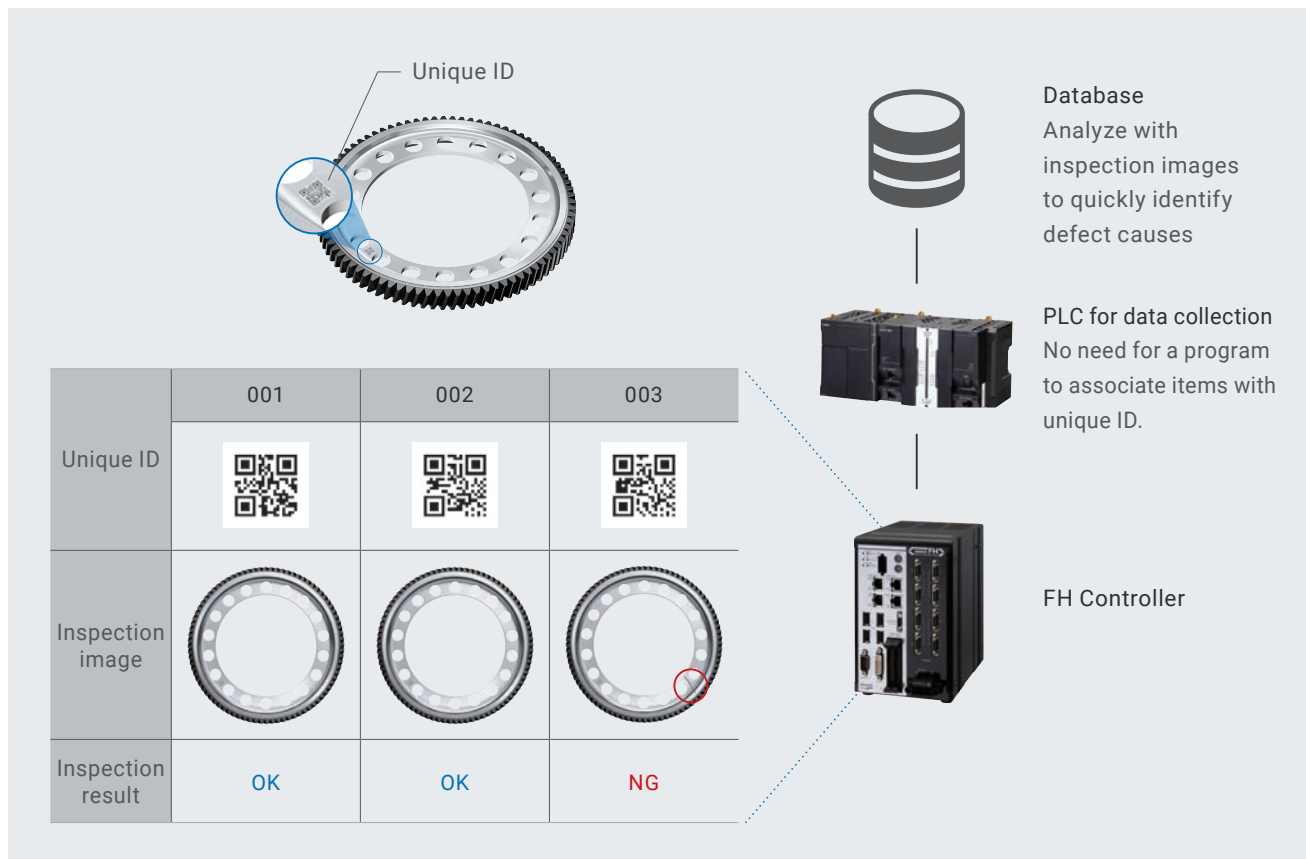


High-speed image storage

The amount of inspection image data required for defect cause analysis can be so large that conventional controllers are unable to store it given their storage time and capacity constraints.

The high-speed, large-capacity controller has USB 3.0 ports and the improved algorithm to compress image data at high speeds, enabling all images to be stored to meet increasing needs in quality control.

The times in the right figure provided for reference only and their accuracy cannot be guaranteed. They are measured under the following conditions:

- FH-5□5□ Controller
- 5 Mpix monochrome images
- Size of converted JPEG file: 0.6 MB

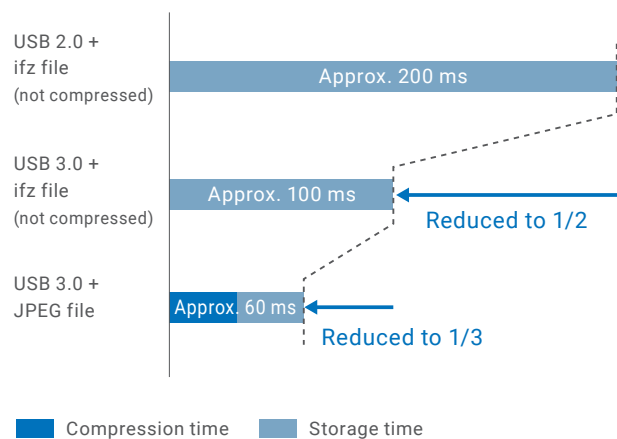










2D Code II provides powerful code reading

Recognition rate
2 times*1

3 times
faster*1

The FH Series incorporates a dedicated algorithm for reliable and fast 2D code reading even under variable ambient brightness or adverse conditions such as after processing or washing.


| | | | |
|---|---|---|---|
| <p>Changing ambient brightness</p>  <p>Chips due to reflection</p>  <p>Low contrast</p> | <p>Poor printing quality in high-speed line</p>  <p>Variations in start positions</p>  <p>Uneven line spacing</p> | <p>After processing or washing</p>  <p>Waterdrops and oil stains</p>  <p>Scratched damage</p> | <p>Poor printing quality on coarse surface</p>  <p>Molding variations of forged object</p> |
| <p>Print Quality Grading Function</p> <ul style="list-style-type: none"> · ISO/IEC 15415 · ISO/IEC TR29158 | | | |

*1. The average value measured under our specified conditions is provided for reference.




OCR reliably reads difficult-to-read characters


OCR can reliably read characters printed too close to each other or on curved surfaces. Also plus signs can be read.

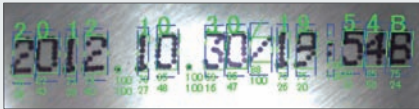

Touching characters



Curved character string including plus sign NEW

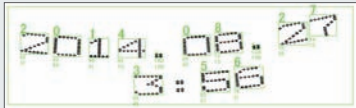


Curved character strings




Character Inspection reads special fonts

Character Inspection recognizes special fonts and non-alphanumeric characters based on pattern search using the dictionary set up by the user.



Special fonts

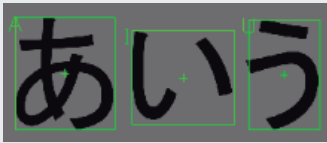


Japanese characters

Design interface for quick setup

Integrated development environment Sysmac Studio

Sysmac Studio is a unique environment that integrates logic, motion and drives, robotics, safety, visualization, and information technologies in a single project, thus reducing the learning curve and the intra-operative software costs.

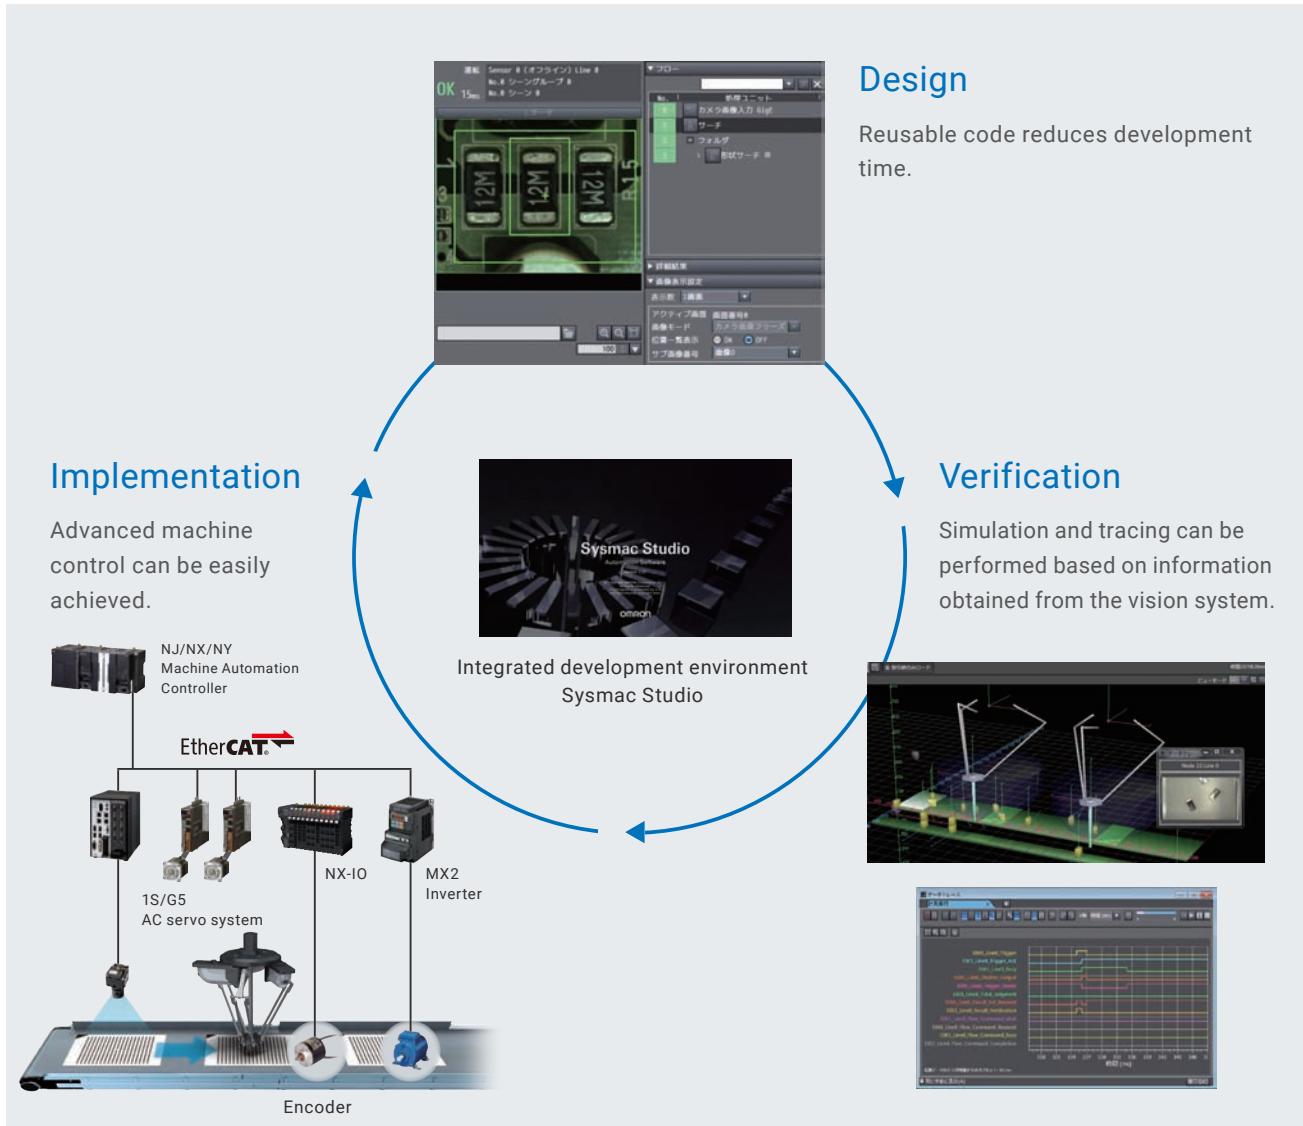


EtherCAT® for high-speed data transfer to control various devices


Data communications cycle: 125 μs

You can use EtherCAT® to connect NJ/NX Machine Automation Controllers and 1S/G5 AC Servo System to increase the control speed of everyday communications protocols from position detection to starting axis motion.

Communications cycle

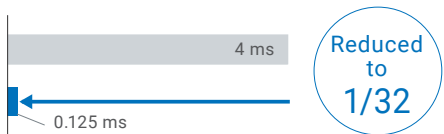

Time from trigger input to producing measurement results

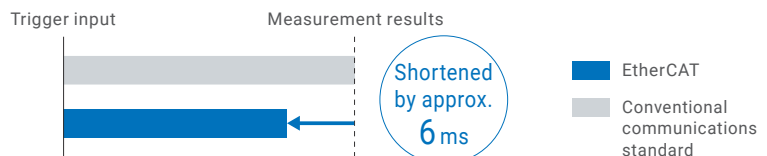

Note: The times given above are typical times. They depend on parameter settings.

Total Design Management Editor simplifies complex processing design


This design interface includes pre-installed screens for all phases, from design through to setting and operation. Just select processing items and determine the order to manage variables. Time-consuming calculations and inputs are no longer required.

Easy setting

All the common settings of multiple scenes can be made at once. Simplified inspection flowcharts reduce setting errors and prevent from forgetting to change settings.


Efficient setting

To inspect aligned parts, the FH Series can repeat the same measurements while shifting the measurement region within the same image. This reduces setting times.

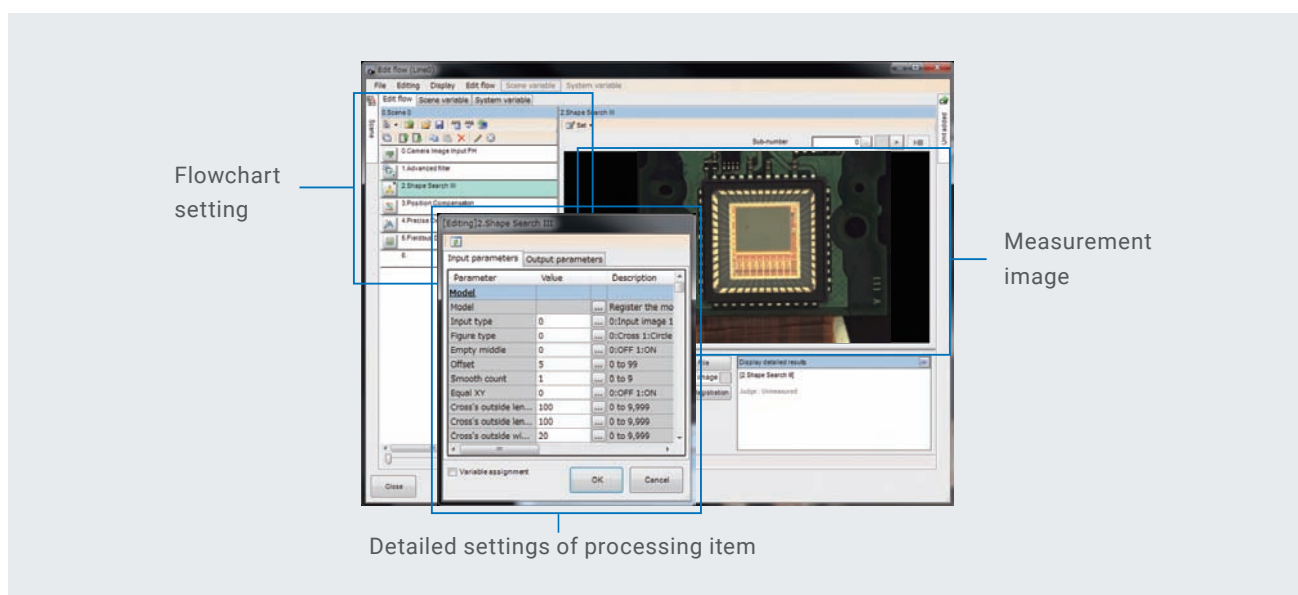

Customizable user interface simplifies operations at production sites

Showing only necessary screens for production makes the interface easier to use. Screen layout can be customized just by selecting and placing objects, without programming.

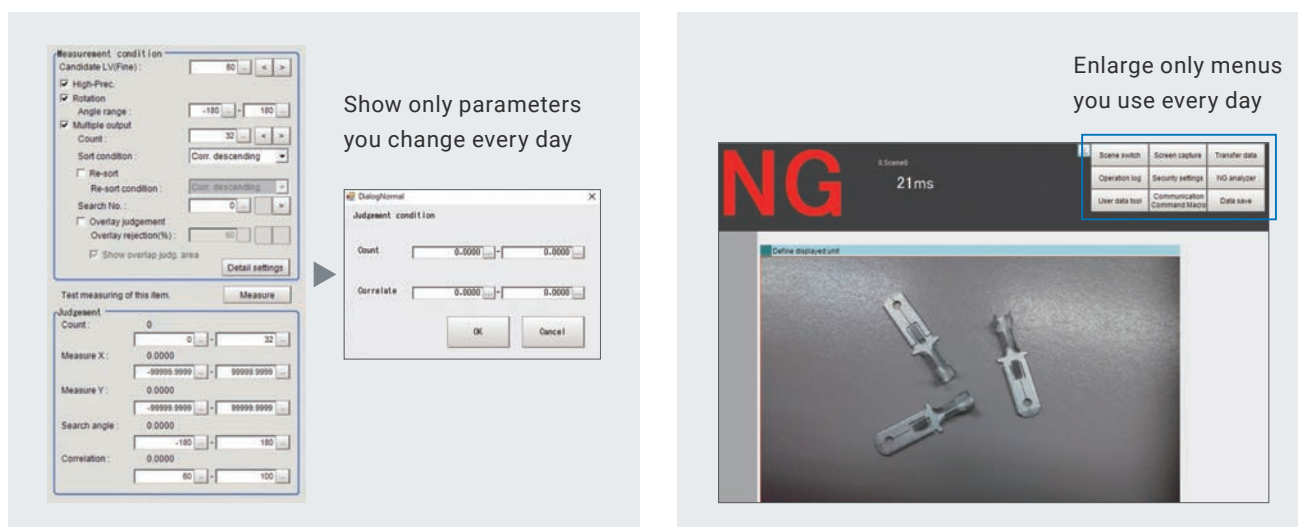

Vision System FH-Series

AI-based automated visual inspection


- AI reproduces human sensibility and experience
- Software for flexible automation
- Design interface for quick setup



System configuration

EtherCAT connections for FH series

Example of the FH Sensor Controllers (4-camera type)

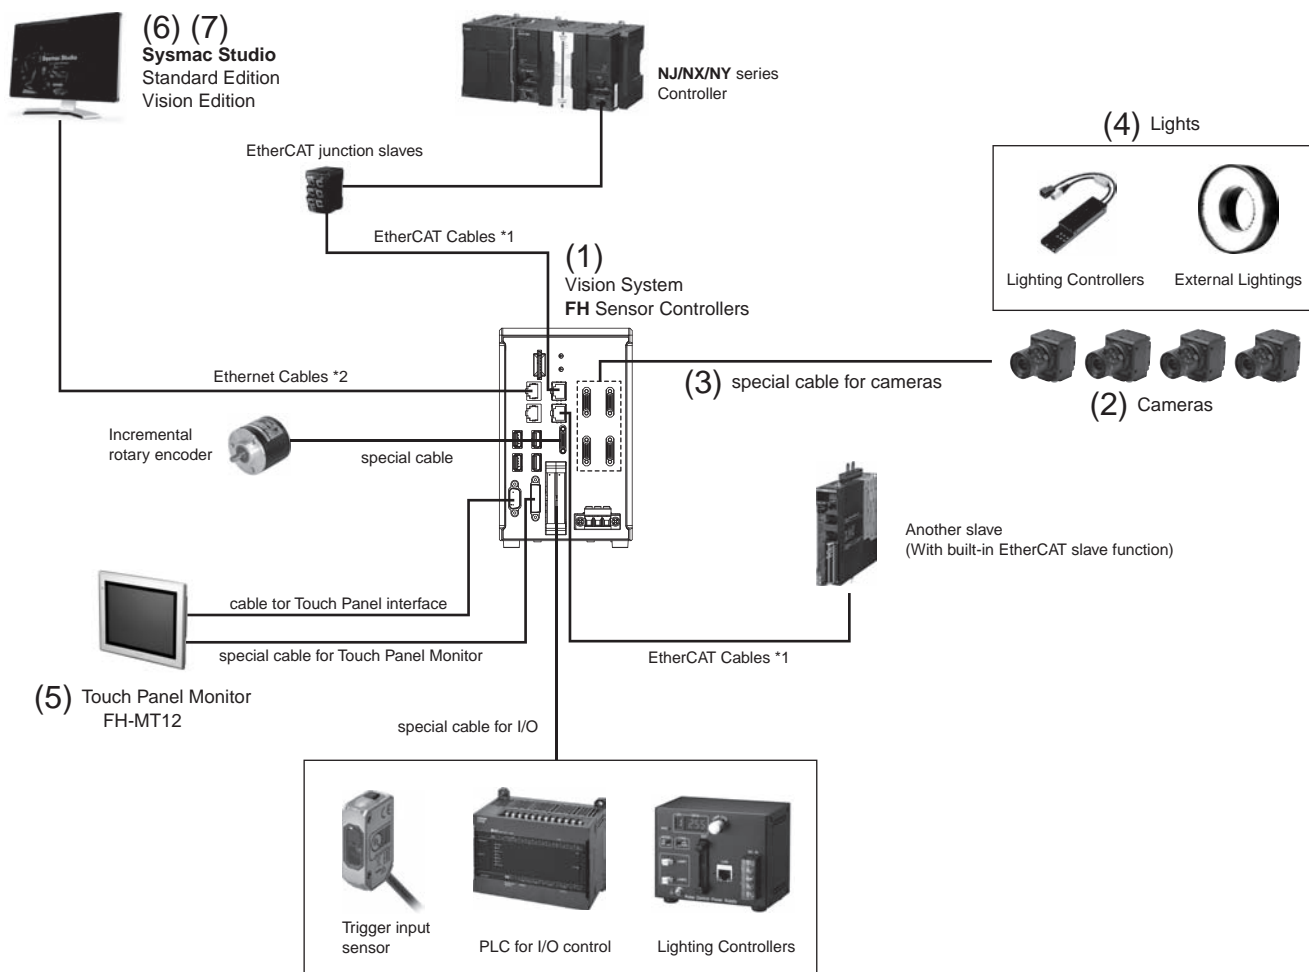

*1. To use STP (shielded twisted-pair) cable of category 5 or higher with double shielding (braiding and aluminum foil tape) for EtherCAT and RJ45 connector.
*2. To use STP (shielded twisted-pair) cable of category 5 or higher for Ethernet and RJ45 connector.



(1) Controllers

Select a controller based on the required processing speed and network.

| | Series | CPU | Performance | Memory | No. of connectable cameras | Fieldbus |
|---------------------------------------|----------------|-----------------------------------|-------------|-----------------------|----------------------------|----------------------------------|
| High-speed, Large-capacity Controller | FH-5552 Series | Intel® Core™ i7 processor 8 cores | ★★★★★ | RAM 32 GB, ROM 128 GB | 8 max. | PROFINET, EtherNet/IP®, EtherCAT |
| | FH-5551 Series | Intel® Core™ i7 processor 4 cores | ★★★★ | RAM 32 GB, ROM 64 GB | 8 max. | PROFINET, EtherNet/IP®, EtherCAT |
| High-speed Controller | FH-5052 Series | Intel® Core™ i7 processor 8 cores | ★★★★★ | RAM 8 GB, ROM 64 GB | 8 max. | PROFINET, EtherNet/IP®, EtherCAT |
| | FH-5051 Series | Intel® Core™ i7 processor 4 cores | ★★★★ | RAM 8 GB, ROM 64 GB | 8 max. | PROFINET, EtherNet/IP®, EtherCAT |
| Standard Controller | FH-2052 Series | Intel® Celeron® processor 2 cores | ★★★ | RAM 8 GB, ROM 64 GB | 8 max. | PROFINET, EtherNet/IP®, EtherCAT |
| | FH-2051 Series | Intel® Celeron® processor 2 cores | ★★ | RAM 8 GB, ROM 64 GB | 8 max. | PROFINET, EtherNet/IP®, EtherCAT |
| Lite Controller | FH-L551 Series | Intel® Atom® processor 2 cores | ★ | RAM 4 GB, ROM 32 GB | 4 max. | PROFINET, EtherNet/IP® |

★: The more stars, the higher the performance.

| Optional product (sold separately) | Model |
|---------------------------------------|----------|
| Scratch Detect AI Software Installer* | FH-UMA11 |

* This product can be installed on the FH-5□□-series Controller (version 6.40 or later).

(2) Cameras

Choose the right camera to suit your required number of pixels. Easy-to-use cameras with built-in light are also available.



| No. of pixels | High-speed camera | Standard camera | Rolling shutter camera | Camera with built-in light |
|-------------------|-------------------|-----------------|------------------------|----------------------------|
| 20.4 Mpix* | --- | --- | FH-S□21R | --- |
| 12 Mpix | FH-S□X12 | --- | --- | --- |
| 5 Mpix | FH-S□X05 | FZ-S□5M3 | FH-S□05R | --- |
| 4 Mpix | FH-S□04 | --- | --- | --- |
| 3.2 Mpix | FH-S□X03 | --- | --- | --- |
| 2 Mpix | FH-S□02 | FZ-S□2M | --- | --- |
| 1.6 Mpix | FH-S□X01 | --- | --- | --- |
| 0.4 Mpix/0.3 Mpix | FH-S□X | FZ-S□ | --- | FZ-SQ□□□□ |

* 20.4 Mpix Cameras can be used with the FH-505□/205□-series High-speed, Large-capacity Controllers.

(4) Lights

Omron offers a complete line-up of lights required for image processing. The use of the camera-mount lighting controller allows you to control lighting conditions from the FH Controller, making system configuration simple.



External lighting controller

| Description | LED | High-brightness LED |
|----------------------------------|-----------------|---------------------|
| Camera-mount Lighting Controller | FLV-TCC | FL-TCC |
| Bar Light | FLV-BR | FL-BR |
| Direct Ring Light | FLV-DR | FL-DR |
| Low Angle Ring Light | FLV-DL | --- |
| Coaxial Light | FLV-CL | --- |
| Shadowless Light | FLV-FR/FP/FS/FQ | --- |
| Spot Light | FLV-EP | --- |
| Direct Back/Edge Type Light | FLV-DB/FB | --- |
| Dome Light | FLV-DD | --- |
| Photometric Stereo Light * | --- | FL-PS |

* The FL-TCC Camera-mount Lighting Controller cannot be used. Use the FL-TCC1PS Lighting Controller for Photometric Stereo Light.

Built-in lighting controller

| Description | Model |
|-------------|-------|
| MDMC Light | FL-MD |

Refer to the *Vision Accessory Catalog* (Cat. No. Q198) for details.

(5) Touch panel monitor

The touch panel monitor is optimized for the operation of the FH Series.



| Description | Model |
|---|------------|
| Touch Panel Monitor 12.1 inches | FH-MT12 |
| DVI-Analog Conversion Cable for Touch Panel Monitor | FH-VMDA □□ |
| USB Cable for Touch Panel Monitor | FH-VUAB □□ |

* RS-232C cables for long-distance connections are also available. Refer to Ordering Information for details.

(3) Camera cables

The cable line-up includes bend-resistant cables and right-angle cables. Use the FZ-VSJ Cable Extension Unit for cable extensions.



| Description | Model |
|---|--------------|
| Camera Cable | FZ-VS□ □□M |
| Bend-resistant Camera Cable | FZ-VSB3 □□M |
| Super-bend-resistant Camera Cable | FZ-VSBX □□M |
| Right-angle Camera Cable | FZ-VSL□ □□M |
| Bend-resistant Right-angle Camera Cable | FZ-VSLB3 □□M |
| Cable Extension Unit | FZ-VSJ |

(6) Sysmac Studio

The development environment for the Sysmac platform allows you to configure and simulate the FH Series on your PC.



| Description | Model |
|-----------------------------------|---------------|
| DVD for installation | SYSMAC-SE200D |
| Software license (Vision Edition) | SYSMAC-VE001L |

For details, refer to *Sysmac Studio Catalog* (Cat. No. P138).

(7) Application producer

This development environment enables you to customize FH functions. It includes sample codes and wizards that will help you develop your own interfaces and processing items.





| Description | Model |
|----------------------|---------|
| DVD for installation | FH-AP1 |
| Software license | FH-AP1L |

FH-Series

Ordering Information

FH Series Sensor Controllers

| Item | CPU | AI function | | Memory | No. of cameras | Output | Model | | |
|--|--|--|-----------------------------------|---------------------|-----------------------|----------------------|-------------------|-------------------|-------------------|
| | | AI Scratch Detect Filter *1 | AI FineMatching | | | | | | |
|  | High-speed, Large-capacity Controller | Intel® Core™ i7 processor 8 cores (new generation) | Available | Available | RAM 32 GB, ROM 128 GB | 2 | NPN/PNP | FH-5552 | |
| | | | | | | 4 | NPN/PNP | FH-5552-10 | |
| | | | | | | 8 | NPN/PNP | FH-5552-20 | |
| | | High-speed Controller | Intel® Core™ i7 processor 4 cores | Available | Available | RAM 32 GB, ROM 64 GB | 2 | NPN/PNP | FH-5551 |
| | | | | | | | 4 | NPN/PNP | FH-5551-10 |
| | | | | | | | 8 | NPN/PNP | FH-5551-20 |
| | Standard Controller | Intel® Core™ i7 processor 8 cores (new generation) | Available | Available | RAM 8 GB, ROM 64 GB | 2 | NPN/PNP | FH-5052 | |
| | | | | | | 4 | NPN/PNP | FH-5052-10 | |
| | | | | | | 8 | NPN/PNP | FH-5052-20 | |
| | | Intel® Core™ i7 processor 4 cores | Available | Available | RAM 8 GB, ROM 64 GB | 2 | NPN/PNP | FH-5051 | |
| | | | | | | 4 | NPN/PNP | FH-5051-10 | |
| | | | | | | 8 | NPN/PNP | FH-5051-20 | |
| Lite Controller | Intel® Celeron® processor 2 cores (new generation) | Not available | Available | RAM 8 GB, ROM 64 GB | 2 | NPN/PNP | FH-2052 | | |
| | | | | | 4 | NPN/PNP | FH-2052-10 | | |
| | | | | | 8 | NPN/PNP | FH-2052-20 | | |
| | Intel® Celeron® processor 2 cores | Not available | Available | RAM 8 GB, ROM 64 GB | 2 | NPN/PNP | FH-2051 | | |
| | | | | | 4 | NPN/PNP | FH-2051-10 | | |
| | | | | | 8 | NPN/PNP | FH-2051-20 | | |
|  | Lite Controller | Intel® Atom® processor 2 cores | Not available | Available *2 | RAM 4 GB, ROM 32 GB | 2 | NPN/PNP | FH-L551 | |
| | | | | | | 4 | NPN/PNP | FH-L551-10 | |

*1 Optional FH-UMA11 Scratch Detect AI Software Installer is required.





*2 Use in conjunction with 0.3 or 0.4 million-pixel cameras.





Optional Products (Sold Separately)

| Item | Model |
|--|-----------------|
| Scratch Detect AI Software Installer * | FH-UMA11 |




* This product can be installed on the FH-5□5□-series Controller (version 6.40 or later).

Cameras

| Item | Lens mount | Descriptions | Color / Monochrome | Image Acquisition Time *1 | Model |
|---|------------|--|--------------------|---------------------------|-----------------|
|  | C mount | 20.4 million pixels (Supported controller: FH-5□5□(-□)/205□(-□) Series) *2 | Color | 42.6 ms *3 | FH-SC21R |
| | | | Monochrome | | FH-SM21R |
|  | C mount | 12 million pixels *2 | Color | 24.9 ms *3 | FH-SCX12 |
| | | | Monochrome | | FH-SMX12 |
| | | 5 million pixels | Color | 10.3 ms *3 | FH-SCX05 |
| | | | Monochrome | | FH-SMX05 |
| | | 3.2 million pixels | Color | 6.6 ms *3 | FH-SCX03 |
| | | | Monochrome | | FH-SMX03 |
| | | 1.6 million pixels | Color | 6.5 ms *3 | FH-SCX01 |
| | | | Monochrome | | FH-SMX01 |
| 0.4 million pixels | Color | 1.9ms *3 | FH-SCX | | |
| | Monochrome | | FH-SMX | | |
|  | M42 mount | 12 million pixels *2 | Color | 25.7 ms *3 | FH-SC12 |
| | | | Monochrome | | FH-SM12 |
|  | C mount | 4 million pixels | Color | 8.5 ms *3 | FH-SC04 |
| | | | Monochrome | | FH-SM04 |
| | | 2 million pixels | Color | 4.6 ms *3 | FH-SC02 |
| | | | Monochrome | | FH-SM02 |
| | | 0.3 million pixels | Color | 3.3 ms | FH-SC |
| | | | Monochrome | | FH-SM |

| Item | Lens mount | Descriptions | Color / Monochrome | Image Acquisition Time *1 | Model | |
|---|---|--------------|--------------------|---------------------------|---------|----------|
|  | Digital CMOS Cameras (Lens required) | C mount | 5 million pixels | Color | 71.7ms | FH-SC05R |
| | | | | Monochrome | | FH-SM05R |
|  | | | 5 million pixels | Color | 38.2 ms | FZ-SC5M3 |
| | | | | Monochrome | | FZ-S5M3 |
|  | Digital CCD Cameras (Lens required) | C mount | 2 million pixels | Color | 33.3 ms | FZ-SC2M |
| | | | | Monochrome | | FZ-S2M |
|  | | | 0.3 million pixels | Color | 12.5 ms | FZ-SC |
| | | | | Monochrome | | FZ-S |

Application Cameras

| Item | Lens mount | Descriptions | Color / Monochrome | Image Acquisition Time *1 | Model | |
|--|--|-------------------------------------|----------------------------|---------------------------|---------|---------------------|
|  | Shortwave Infrared (SWIR) Camera (Lens required) | C mount | 1.31 million pixels | Monochrome | 8.3 ms | FH-SMX01-SWIR *7 |
| | | | 0.33 million pixels | Monochrome | 4.2 ms | FH-SMX-SWIR *7 |
|  | Small Digital CCD Cameras (Lens required) | Lenses for small camera required | 0.3-million flat type | Color | 12.5 ms | FZ-SFC |
| | | | | Monochrome | | FZ-SF |
| | | | 0.3-million pen type | Color | 12.5 ms | FZ-SPC |
| | | | | Monochrome | | FZ-SP |
|  | Intelligent Compact Digital CMOS Camera | Built-in lens | Narrow view | Color | 16.7 ms | FZ-SQ010F |
| | | | Standard view | Color | | FZ-SQ050F |
| | | | Wide View (long-distance) | Color | | FZ-SQ100F |
| | | | Wide View (short-distance) | Color | | FZ-SQ100N |

*1 The image acquisition time does not include the image conversion processing time of the sensor controller.

The camera image input time varies depending on the sensor controller model, number of cameras, and camera settings. Check before you use the camera.

*2 Up to four cameras of this model can be connected to one controller. Up to eight cameras including other models can be connected to an FH-□□□□-20.

*3 Frame rate in high speed mode when the camera is connected using two camera cables. For other conditions, refer to the following table.

| Model | | | FH-SM02 | FH-SC02 | FH-SM04 | FH-SC04 | FH-SM12 | FH-SC12 | FH-SMX | FH-SCX | FH-SMX01 | FH-SCX01 | FH-SMX03 | FH-SCX03 | FH-SMX05 | FH-SCX05 | FH-SMX12 | FH-SCX12 | FH-SM21R | FH-SC21R | |
|---------------------------|-------------|--------------------|---------|---------|----------|---------|---------|---------|---------|----------|----------|----------|----------|----------|----------|----------|----------|----------|----------|----------|--|
| Image Acquisition Time *4 | 2 Cables *5 | High Speed Mode *6 | 4.6 ms | 8.5 ms | 25.7 ms | --- | --- | --- | --- | --- | --- | --- | 6.6 ms | 10.3 ms | 24.9 ms | 42.6 ms | | | | | |
| | | Standard Mode | 9.7 ms | 17.9 ms | 51.3 ms | --- | --- | --- | --- | --- | --- | --- | --- | 14.1 ms | 22.1 ms | 53.5 ms | 90.1 ms | | | | |
| | 1 Cables | High Speed Mode *6 | 9.2 ms | 17.0 ms | 51.3 ms | 1.9 ms | 6.5 ms | 13.2 ms | 20.6 ms | 50.0 ms | 83.3 ms | | | | | | | | | | |
| | | Standard Mode | 19.3 ms | 35.8 ms | 102.0 ms | 3.8 ms | 14.7 ms | 28.2 ms | 44.1 ms | 106.4 ms | 175.4 ms | | | | | | | | | | |

*4 The image acquisition time does not include the image conversion processing time of the sensor controller.

*5 Two Camera ports of the controller are used per one camera.

*6 Up to 5 m Camera Cable length.

*7 These cannot be connected to the old controller FH-5□□50/2050/L550 series not listed in this catalog.









Export and Trade Control Laws

This product is classed as a commodity (or technology) requiring acquisition of export permission in accordance with foreign exchange and overseas trade control laws.

When this product is to be taken outside of Japan, adopt the required procedures such as application for export permission by the Japanese government.

When this product is to be taken outside of countries after imported from Japan, please confirm export and trade control laws of country and adopt the required procedures.

Camera Cables

| Item | Descriptions | Model *3 |
|---|--|-------------|
|  | Camera Cable Cable length: 2 m, 3 m, 5 m, or 10 m *2 | FZ-VS3 □M |
|  | Bend resistant Camera Cable Cable length: 2 m, 3 m, 5 m, or 10 m *2 | FZ-VSB3 □M |
|  | Super Bend resistant Camera Cable Cable length: 5 m or 10 m | FZ-VSBX □M |
|  | Right-angle Camera Cable *1 Cable length: 2 m, 3 m, 5 m, or 10 m *2 | FZ-VSL3 □M |
|  | Bend resistant Right-angle Camera Cable *1 Cable length: 2 m, 3 m, 5 m, or 10 m *2 | FZ-VSLB3 □M |
|  | Long-distance Camera Cable Cable length: 15 m *2 | FZ-VS4 15M |
|  | Long-distance Right-angle Camera Cable *1 Cable length: 15 m *2 | FZ-VSL4 15M |
|  | Cable Extension Unit Up to two Extension Units and three Cables can be connected. (Maximum cable length: 45 m *2) | FZ-VSJ |

*1 This Cable has an L-shaped connector on the Camera end.

*2 The maximum cable length depends on the camera being connected, and the model and length of the cable being used. For further information, refer to the *Cameras / Cables Connection Table and Maximum Extension Length Using Cable Extension Units FZ-VSJ* table.

When a High-speed Digital CMOS Camera FH-S□02/-S□04/-S□12/-S□X03/-S□X05/-S□X12/-S□21R is used in the high speed mode of transmission speed, two camera cables are required.

*3 Insert the cables length into □ in the model number as follows. 2 m = 2, 3 m = 3, 5 m = 5, 10 m = 10

Cameras / Cables Connection Table

| Camera Cables | Model | Cable length | High-speed Digital CMOS cameras | | | | | | | |
|---|---------------------|--------------|---------------------------------|--|--|--|--|--|--|-----|
| | | | 300,000-pixel | | 2 million-pixel | | 4 million-pixel | | 12 million-pixel | |
| | | | FH-SM/SC | | FH-SM02/SC02 | | FH-SM04/SC04 | | FH-SM12/SC12 | |
| | | | — | High speed mode of transmission speed select | Standard mode of transmission speed select | High speed mode of transmission speed select | Standard mode of transmission speed select | High speed mode of transmission speed select | Standard mode of transmission speed select | |
| Camera Cables Right-angle camera cables | FZ-VS3 FZ-VSL3 | 2 m | Yes | Yes | Yes | Yes | Yes | Yes | Yes | Yes |
| | | 3 m | Yes | Yes | Yes | Yes | Yes | Yes | Yes | Yes |
| | | 5 m | Yes | Yes | Yes | Yes | Yes | Yes | Yes | Yes |
| | | 10 m | Yes | No | Yes | No | Yes | No | Yes | Yes |
| Bend resistant camera cables Bend resistant Right-angle Camera Cable | FZ-VSB3 FZ-VSLB3 | 2 m | Yes | Yes | Yes | Yes | Yes | Yes | Yes | Yes |
| | | 3 m | Yes | Yes | Yes | Yes | Yes | Yes | Yes | Yes |
| | | 5 m | Yes | Yes | Yes | Yes | Yes | Yes | Yes | Yes |
| | | 10 m | Yes | No | Yes | No | Yes | No | Yes | Yes |
| Super Bend resistant Camera Cable | FZ-VSBX | 5 m | Yes | Yes | Yes | Yes | Yes | Yes | Yes | Yes |
| | | 10 m | Yes | No | Yes | No | Yes | No | Yes | Yes |
| Long-distance camera cable Long-distance right-angle camera cable | FZ-VS4 FZ-VSL4 | 15 m | Yes | No | Yes | No | Yes | No | Yes | Yes |

| Camera Cables | Model | Cable length | High-speed Digital CMOS cameras | | | | | | | | | |
|---|---------------------|--------------|--|--|--|--|--|--|--|--|--|--|
| | | | 400,000-pixel | | 1.6 million-pixel | | 3.2 million-pixel | | 5 million-pixel | | 12 million-pixel | |
| | | | FH-SMX/SCX | | FH-SMX01/SCX01 | | FH-SMX03/SCX03 | | FH-SMX05/SCX05 | | FH-SMX12/SCX12 | |
| | | | High speed mode of transmission speed select | Standard mode of transmission speed select | High speed mode of transmission speed select | Standard mode of transmission speed select | High speed mode of transmission speed select | Standard mode of transmission speed select | High speed mode of transmission speed select | Standard mode of transmission speed select | High speed mode of transmission speed select | Standard mode of transmission speed select |
| Camera Cables Right-angle camera cables | FZ-VS3 FZ-VSL3 | 2 m | Yes | Yes | Yes | Yes | Yes | Yes | Yes | Yes | Yes | Yes |
| | | 3 m | Yes | Yes | Yes | Yes | Yes | Yes | Yes | Yes | Yes | Yes |
| | | 5 m | Yes | Yes | Yes | Yes | Yes | Yes | Yes | Yes | Yes | Yes |
| | | 10 m | No | Yes | No | Yes | No | Yes | No | Yes | No | Yes |
| Bend resistant camera cables Bend resistant Right-angle Camera Cable | FZ-VSB3 FZ-VSLB3 | 2 m | Yes | Yes | Yes | Yes | Yes | Yes | Yes | Yes | Yes | Yes |
| | | 3 m | Yes | Yes | Yes | Yes | Yes | Yes | Yes | Yes | Yes | Yes |
| | | 5 m | Yes | Yes | Yes | Yes | Yes | Yes | Yes | Yes | Yes | Yes |
| | | 10 m | No | Yes | No | Yes | No | Yes | No | Yes | No | Yes |
| Super Bend resistant Camera Cable | FZ-VSBX | 5 m | Yes | Yes | Yes | Yes | Yes | Yes | Yes | Yes | Yes | Yes |
| | | 10 m | No | Yes | No | Yes | No | Yes | No | Yes | No | Yes |
| Long-distance camera cable Long-distance right-angle camera cable | FZ-VS4 FZ-VSL4 | 15 m | No | Yes | No | Yes | No | Yes | No | Yes | No | Yes |

| Camera Cables | Model | Cable length | Digital CMOS Camera | | | Digital CCD cameras | | |
|---|---------------------|--------------|---------------------|--|--|---------------------|---------------|-----------------|
| | | | 5 million-pixel | 20.4 million-pixel | | 5 million-pixel | 300,000-pixel | 2 million-pixel |
| | | | FH-SM05R/SC05R | FH-SM21R/SC21R | | FZ-S5M3/SC5M3 | FZ-S/SC | FZ-S2M/SC2M |
| | | | — | High speed mode of transmission speed select | Standard mode of transmission speed select | — | — | — |
| Camera Cables Right-angle camera cables | FZ-VS3 FZ-VSL3 | 2 m | Yes | Yes | Yes | Yes | Yes | Yes |
| | | 3 m | Yes | Yes | Yes | Yes | Yes | Yes |
| | | 5 m | Yes | Yes | Yes | Yes | Yes | Yes |
| | | 10 m | Yes | No | Yes | No | Yes | Yes |
| Bend resistant camera cables Bend resistant Right-angle Camera Cable | FZ-VSB3 FZ-VSLB3 | 2 m | Yes | Yes | Yes | Yes | Yes | Yes |
| | | 3 m | Yes | Yes | Yes | Yes | Yes | Yes |
| | | 5 m | Yes | Yes | Yes | Yes | Yes | Yes |
| | | 10 m | Yes | No | Yes | No | Yes | Yes |
| Super Bend resistant Camera Cable | FZ-VSBX | 5 m | Yes | Yes | Yes | Yes | Yes | Yes |
| | | 10 m | Yes | No | Yes | No | Yes | Yes |
| Long-distance camera cable Long-distance right-angle camera cable | FZ-VS4 FZ-VSL4 | 15 m | Yes | No | Yes | No | Yes | Yes |

FH-Series

| Camera Cables | Model | Cable length | Shortwave Infrared (SWIR) Camera | |
|--|---------------------|--------------|----------------------------------|--------------------|
| | | | 330,000-pixel | 1.31 million-pixel |
| | | | FH-SMX-SWIR | FH-SMX01-SWIR |
| Camera Cables Right-angle camera cables | FZ-VS3 FZ-VSL3 | 2 m | Yes | Yes |
| | | 3 m | Yes | Yes |
| | | 5 m | Yes | Yes |
| | | 10 m | No | No |
| Bend resistant camera cables Bend resistant Right-angle Camera Cable | FZ-VSB3 FZ-VSLB3 | 2 m | Yes | Yes |
| | | 3 m | Yes | Yes |
| | | 5 m | Yes | Yes |
| | | 10 m | No | No |
| Super Bend resistant Camera Cable | FZ-VSBX | 5 m | Yes | Yes |
| | | 10 m | No | No |
| Long-distance camera cable Long-distance right-angle camera cable | FZ-VS4 FZ-VSL4 | 15 m | No | No |

| Camera Cables | Model | Cable length | Small digital CCD cameras Pen type / flat type | Intelligent Compact Digital CMOS Camera |
|--|---------------------|--------------|---|--|
| | | | FZ-SF/SFC FZ-SP/SPC | FZ-SQ□ |
| Camera Cables Right-angle camera cables | FZ-VS3 FZ-VSL3 | 2 m | Yes | Yes |
| | | 3 m | Yes | Yes |
| | | 5 m | Yes | Yes |
| | | 10 m | Yes | Yes |
| Bend resistant camera cables Bend resistant Right-angle Camera Cable | FZ-VSB3 FZ-VSLB3 | 2 m | Yes | Yes |
| | | 3 m | Yes | Yes |
| | | 5 m | Yes | Yes |
| | | 10 m | Yes | Yes |
| Super Bend resistant Camera Cable | FZ-VSBX | 5 m | Yes | Yes |
| | | 10 m | Yes | Yes |
| Long-distance camera cable Long-distance right-angle camera cable | FZ-VS4 FZ-VSL4 | 15 m | Yes | Yes |

Maximum Extension Length Using Cable Extension Units FZ-VSJ

| Item | Model | Transmission speed (*1) | No. of CH used for connection (*2) | Maximum cable length using 1 Camera Cable (*1) | Max. number of connectable Extension Units | Using Cable Extension Units FZ-VSJ | |
|---|--|-------------------------|------------------------------------|--|--|---|--|
| | | | | | | Max. cable length | Connection configuration |
| High-speed Digital CMOS Cameras | FH-SM/SC | --- | --- | 15 m (Using FZ-VS4/VSL4) | 2 | 45 m | [Configuration 1] Camera cable: 15 m × 3 Extension Unit: 2 |
| | FH-SMX/SCX FH-SMX01/SCX01 | Standard | --- | 15 m (Using FZ-VS4/VSL4) | 2 | 45 m | [Configuration 1] Camera cable: 15 m × 3 Extension Unit: 2 |
| | | High speed | --- | 5 m (Using FZ-VS□/VSL□) | 2 | 15 m | [Configuration 3] Camera cable: 5 m × 3 Extension Unit: 2 |
| | FH-SM02/SC02 FH-SM04/SC04 FH-SM12/SC12 FH-SMX03/SCX03 FH-SMX05/SCX05 FH-SMX12/SCX12 | Standard | 1 | 15 m (Using FZ-VS4/VSL4) | 2 | 45 m | [Configuration 1] Camera cable: 15 m × 3 Extension Unit: 2 |
| | | | 2 | 15 m (Using FZ-VS4/VSL4) | 4 (*3) | 45 m | [Configuration 2] Camera cable: 15 m × 6 Extension Unit: 4 |
| | | High speed | 1 | 5 m (Using FZ-VS□/VSL□) | 2 | 15 m | [Configuration 3] Camera cable: 5 m × 3 Extension Unit: 2 |
| 2 | | | 5 m (Using FZ-VS□/VSL□) | 4 (*3) | 15 m | [Configuration 4] Camera cable: 5 m × 6 Extension Unit: 4 | |
| Digital CMOS Cameras | FH-SM21R/SC21R | Standard | 1 | 15 m (Using FZ-VS4/VSL4) | 2 | 45 m | [Configuration 1] Camera cable: 15 m × 3 Extension Unit: 2 |
| | | | 2 | 15 m (Using FZ-VS4/VSL4) | 4 (*3) | 45 m | [Configuration 2] Camera cable: 15 m × 6 Extension Unit: 4 |
| | | High speed | 1 | 5 m (Using FZ-VS□/VSL□) | 2 | 15 m | [Configuration 3] Camera cable: 5 m × 3 Extension Unit: 2 |
| | | | 2 | 5 m (Using FZ-VS□/VSL□) | 4 (*3) | 15 m | [Configuration 4] Camera cable: 5 m × 6 Extension Unit: 4 |
| | FH-SM05R/SC05R | --- | --- | 15 m (Using FZ-VS□/VSL□) | 2 | 45 m | [Configuration 1] Camera cable: 15 m × 3 Extension Unit: 2 |
| | FZ-S5M3/SC5M3 | --- | --- | 5 m (Using FZ-VS□/VSL□) | 2 | 15 m | [Configuration 3] Camera cable: 5 m × 3 Extension Unit: 2 |
| Digital CCD Cameras | FZ-S/SC FZ-S2M/SC2M | --- | --- | 15 m (Using FZ-VS4/VSL4) | 2 | 45 m | [Configuration 1] Camera cable: 15 m × 3 Extension Unit: 2 |
| Shortwave Infrared (SWIR) Camera | FH-SMX-SWIR FH-SMX01-SWIR | --- | --- | 5 m (Using FZ-VS□/VSL□) | 2 | 15 m | [Configuration 3] Camera cable: 5 m × 3 Extension Unit: 2 |
| Small Digital CCD Cameras Flat type/ Pen type | FZ-SF/SFC FZ-SP/SPC | --- | --- | 15 m (Using FZ-VS4/VSL4) | 2 | 45 m | [Configuration 1] Camera cable: 15 m × 3 Extension Unit: 2 |
| Intelligent Compact Digital CMOS Camera | FZ-SQ□ | --- | --- | 15 m (Using FZ-VS4/VSL4) | 2 | 45 m | [Configuration 1] Camera cable: 15 m × 3 Extension Unit: 2 |

*1 The FH-S□□□ enables switching between standard and high speed modes. In high speed mode, images can be transferred approximately two times faster than in standard mode, but the connectable cable length will be shorter.

*2 The FH-S□□□ has two channels to connect Camera Cables. Connection to two channels makes image transfer two times faster than connection to one channel: high speed mode using two channels can transfer approximately four times as many images as standard mode using one channel.

*3 Each channel can be used to connect up to two Cable Extension Units: up to four extension units, two channels x two units, can be connected by using two channels.

Connection Configuration

| | Connection configuration using the maximum length of Camera Cables | Remarks |
|-----------------|--|---------|
| Configuration 1 | | |
| Configuration 2 | | |
| Configuration 3 | | |
| Configuration 4 | | |

*4 Select the Camera Cables between the Controller and Extension Unit, between the Extension Units, and between the Extension Unit and Camera according to the connected Camera.
Different types or lengths of Camera Cables can be used for (1), (2), and (3) as well as for (4), (5), and (6). However, the type and length of Camera Cable (1) must be the same as those of Camera Cable (4), (2) must be the same as (5), and (3) must be the same as (6).

Monitor

| Item | Descriptions | Model |
|------|--|---------|
| | Touch Panel Monitor 12.1 inches For FH Sensor Controllers * | FH-MT12 |
| | LCD Monitor 8.4 inches | FZ-M08 |

* FH Series Sensor Controllers version 5.32 or higher is required.

Monitor Cables

| Item | Descriptions | Model |
|------|---|-----------------|
| | DVI-Analog Conversion Cable for Touch Panel Monitor/LCD Monitor Cable length: 2 m, 5 m or 10 m | FH-VMDA □M *1 |
| | RS-232C Cable for Touch Panel Monitor Cable length: 2 m, 5 m or 10 m | XW2Z-□□□PP-1 *2 |
| | USB Cable for Touch Panel Monitor Cable length: 2 m or 5 m | FH-VUAB □M *1 |

*1 Insert the cables length into □ in the model number as follows. 2 m = 2, 5 m = 5, 10 m = 10

*2 Insert the cables length into □□□ in the model number as follows. 2 m = 200, 5 m = 500, 10 m = 010.

A video signal cable and an operation signal cable are required to connect the Touch Panel Monitor.

| Signal | Cable | 2 m | 5 m | 10 m |
|------------------------------|-----------------------------|-----|-----|------|
| Video signal | DVI-Analog Conversion Cable | Yes | Yes | Yes |
| Touch panel operation signal | USB Cable | Yes | Yes | No |
| | RS-232C Cable | Yes | Yes | Yes |

Parallel I/O Cables/Encoder Cable

| Item | Descriptions | Model |
|------|--|----------------|
| | Parallel I/O Cable *1 Cable length: 2m, 5m or 15m | XW2Z-S013-□ *2 |
| | Parallel I/O Cable for Connector-terminal Conversion Unit *1 Cable length: 0.5 m, 1 m, 1.5 m, 2 m, 3 m, 5 m Connector-Terminal Block Conversion Units can be connected (Terminal Blocks Recommended Products: OMRON XW2K-34G-T) | XW2Z-□□□EE *3 |
| | Ultra-Compact Interface Wiring System (General-Purpose) | XW2K-34G-T *4 |
| | Encoder Cable for line-driver Cable length: 1.5 m | FH-VR 1.5M |

*1 2 Cables are required for all I/O signals.





*2 Insert the cables length into □ in the model number as follows. 2 m = 2, 5 m = 5, 15 m = 15

*3 Insert the cables length into □□□ in the model number as follows. 0.5 m = 050, 1 m = 100, 1.5 m = 150, 2 m = 200, 3 m = 300, 5 m = 500

*4 Refer to the XW2K Series Datasheet (Cat. No. G152) for details.

Parallel Converter Cable

When you change to connect the F series, FZ5 series, or FZ5-L series to FH series Sensor Controller, you can convert by using the appropriate parallel converter cable of FH-VPX series under the usable condition.

| Item | Applicable Model | | Usable Condition | Model |
|---|------------------|--------------|---|-------------|
|  | FZ□ series | | <ul style="list-style-type: none"> Do not use RESET signal. * Use with COMIN and COMUT are same power source. | FH-VPX-FZ |
|  | FZ□-L35x series | | <ul style="list-style-type: none"> Do not use RESET signal. * | FH-VPX-FZL |
|  | F160 series | F160-C10 | <ul style="list-style-type: none"> Do not use RESET signal. * Use with COMIN and COMOUT are same power source. Do not use DI5 and DI6. | FH-VPX-F160 |
|  | F210 series | F210-C10 | <ul style="list-style-type: none"> Do not use RESET signal. * Use with COMIN and COMOUT are same power source. Do not use DI8 and DI9. | FH-VPX-F210 |
| | | F210-C10-ETN | | |
| | F500 series | F500-C10 | | |

* Even if RESET signal cannot be use by conversion, conversion is possible to convert satisfying other usable condition.





Note: Cannot be used for the F160-C10CP/-C10CF.

Recommended EtherCAT and EtherNet/IP Communications Cables

Use Straight STP (shielded twisted-pair) cable of category 5 or higher with double shielding (braiding and aluminum foil tape) for EtherCAT.

Use Straight or cross STP (shielded twisted-pair) cable of category 5 or higher for EtherNet/IP.

Cable with Connectors

| Item | Appearance | Recommended manufacturer | Cable length (m) | Model |
|---|---|--------------------------|------------------|----------------------|
| Cable with Connectors on Both Ends (RJ45/RJ45) Standard RJ45 plugs type *1 Wire Gauge and Number of Pairs: AWG26, 4-pair Cable Cable Sheath material: PUR Cable color: Yellow *2 |  | OMRON | 0.3 | XS6W-6PUR8SS30CM-YF |
| | | | 0.5 | XS6W-6PUR8SS50CM-YF |
| | | | 1 | XS6W-6PUR8SS100CM-YF |
| | | | 2 | XS6W-6PUR8SS200CM-YF |
| | | | 3 | XS6W-6PUR8SS300CM-YF |
| | | | 5 | XS6W-6PUR8SS500CM-YF |
| Cable with Connectors on Both Ends (RJ45/RJ45) Rugged RJ45 plugs type *1 Wire Gauge and Number of Pairs: AWG22, 2-pair Cable Cable color: Light blue |  | OMRON | 0.3 | XS5W-T421-AMD-K |
| | | | 0.5 | XS5W-T421-BMD-K |
| | | | 1 | XS5W-T421-CMD-K |
| | | | 2 | XS5W-T421-DMD-K |
| | | | 5 | XS5W-T421-GMD-K |
| | | | 10 | XS5W-T421-JMD-K |
| Cable with Connectors on Both Ends (M12 Straight/M12 Straight) Shield Strengthening Connector cable *3 M12/Smartclick Connectors Wire Gauge and Number of Pairs: AWG22, 2-pair Cable Cable color: Black |  | OMRON | 0.5 | XS5W-T421-BM2-SS |
| | | | 1 | XS5W-T421-CM2-SS |
| | | | 2 | XS5W-T421-DM2-SS |
| | | | 3 | XS5W-T421-EM2-SS |
| | | | 5 | XS5W-T421-GM2-SS |
| | | | 10 | XS5W-T421-JM2-SS |
| Cable with Connectors on Both Ends (M12 Straight/RJ45) Shield Strengthening Connector cable *3 M12/Smartclick Connectors Rugged RJ45 plugs type Wire Gauge and Number of Pairs: AWG22, 2-pair Cable Cable color: Black |  | OMRON | 0.5 | XS5W-T421-BMC-SS |
| | | | 1 | XS5W-T421-CMC-SS |
| | | | 2 | XS5W-T421-DMC-SS |
| | | | 3 | XS5W-T421-EMC-SS |
| | | | 5 | XS5W-T421-GMC-SS |
| | | | 10 | XS5W-T421-JMC-SS |


*1 Cables with standard RJ45 plugs are available in the following lengths: 0.2 m, 0.3 m, 0.5 m, 1 m, 1.5 m, 2 m, 3 m, 5 m, 7.5 m, 10 m, 15 m, 20 m. Cables with rugged RJ45 plugs are available in the following lengths: 0.3 m, 0.5 m, 1 m, 2 m, 3 m, 5 m, 10 m, 15 m.

For details, refer to the Industrial Ethernet Connectors Catalog (Cat. No. G019).

*2 Cables colors are available in yellow, green, and blue.

*3 For details, contact your OMRON representative.

Cables / Connectors

| Item | Recommended manufacturer | Model |
|---|---|---|
| Products for EtherCAT or EtherNet/IP (100BASE-T/100BASE-TX) Wire gauge and number of pairs: AWG24, 4-pair cable | Cable | Hitachi Metals, Ltd. NETSTAR-C5E SAB 0.5 x 4P CP *1 |
| | RJ45 Connector | Kuramo Electric Co. KETH-SB *1 |
| Products for EtherCAT or EtherNet/IP (100BASE-TX/10BASE-T) Wire gauge and number of pairs: AWG22, 2-pair cable | Cable | Panduit Corporation MPS588-C *1 |
| | | Kuramo Electric Co. KETH-PSB-OMR *2 |
| | RJ45 Assembly Connector  | JMACS Japan Co., Ltd. PNET/B *2 |
| | OMRON | XS6G-T421-1 *2 |

*1 We recommend you to use the above Cable and RJ45 Connector together.

*2 We recommend you to use the above Cable and RJ45 Assembly Connector together.

Automation Software Sysmac Studio

The Sysmac Studio is the software that provides an integrated environment for setting, programming, debugging and maintenance of machine automation controllers including the NJ/NX-series CPU Units, NY-series Industrial PC, EtherCAT Slave, and the HMI.












For details, refer to your local OMRON website and *Sysmac Studio Catalog* (Cat. No. P138).

Development Environment

Please purchase a CD-ROM and licenses the first time you purchase the Application Producer. CD-ROMs and licenses are available individually. The license does not include the CD-ROM.

| Product | Specifications | Number of Model Standards licenses | Media | Model |
|---------|----------------|------------------------------------|---|----------------|
| | | Application Producer | Software components that provide a development environment to further customize the standard controller features of the FH Series. System requirements: CPU: Intel Pentium Processor (SSE2 or higher) OS: Windows 10 (32/64bit) Windows 11 .NET Framework: .NET Framework 3.5 SP1 or higher Memory: At least 2 GB RAM Available disk space: At least 2 GB Browser: Microsoft® Internet Explorer 6.0 or later Display: XGA (1024 × 768), True Color (32-bit) or higher Optical drive: CD/DVD drive The following software is required to customize the software: Microsoft® Visual Studio® 2008 Professional or Microsoft® Visual Studio® 2010 Professional or Microsoft® Visual Studio® 2012 Professional | |
| | | 1 license | — | FH-AP1L |

Accessories

| Item | Descriptions | | | | Model |
|--|--|---|--|--|---------------------------|
|  | USB Memory | 2 GB | | | FZ-MEM2G |
| | | 16 GB | | | FZ-MEM16G |
|  | SD Card | 2 GB | | | HMC-SD293 |
| | | 4 GB | | | HMC-SD493 |
| | | 16 GB | | | HMC-SD1A3 |
|  | Display/USB Switcher | | | | FZ-DU |
| — | Mouse Recommended Products Driverless wired mouse (A mouse that requires the mouse driver to be installed is not supported.) | | | | --- |
|  | EtherCAT junction slaves | 3 port | Power supply voltage: 20.4 to 28.8 VDC (24 VDC -15 to 20%) | Current consumption: 0.08 A | GX-JC03 |
| | | 6 port | | Current consumption: 0.17 A | GX-JC06 |
|  | Industrial Switching Hubs for EtherNet/IP and Ether- net | 5 port | | Current consumption: 0.07 A | W4S1-05D |
| — | Calibration Plate | | | | FZD-CAL |
|  | Common items related to DIN rail (for FH-L551/-L551-10) | DIN rail mounting bracket (For Lite Controllers) | | | FH-XDM-L |
|  | | DIN 35mm rail | PHOENIX CONTACT | • Length: 75.5/95.5/115.5/200 cm • Height: 7.5mm • Material: Iron • Surface: Conductive | NS 35/7,5 PERF |
| | | | | • Length: 75.5/95.5/115.5/200 cm • Height: 15mm • Material: Iron • Surface: Conductive | NS 35/15 PERF |
| — | | End plate | PHOENIX CONTACT | Need 2 pieces each Sensor Con- troller | CLIPFIX 35 |
| — | External Lights *1 | External lighting controller | LED | FLV Series | |
| | | | High-brightness LED | FL-BR/DR Series | |
| | | | Photometric Stereo Light | FL-PS Series | |
|     | For Intelligent Compact Digital CMOS Camera | Built-in lighting controller | MDMC Light | FL-MD Series | |
| | | | Mounting Bracket | FQ-XL | |
| | | | Mounting Brackets | FQ-XL2 | |
| | | | Polarizing Filter Attachment | FQ-XF1 | |
| — | Mounting Bracket for FZ-S□, FH-S□05R, FZ-S□X | | | Cover Attachment (for replacement) | FQ-XF2 |
| | | | | Mounting Bracket for FZ-S□2M | FZ-S2M-XLC |
| | | | | Mounting Bracket for FH-S□, FZ-S□5M□, FH-S□X05, FH-S□X12, FH-S□21R | FH-SM-XLC |
| | | | | Mounting Bracket for FH-S□12 | FH-SM12-XLC |
| | | | | M42 - F Mount Conversion Adapter | FH-ADF/M42-10 |

*1 Refer to the Vision Accessory Catalog (Cat. No. Q198) for details.

*2 This SD card cannot be used with the FH-L551/-L551-10. Use the recommended SD cards listed below.

FH-Series

Lenses

Refer to the *Vision Accessory Catalog* (Cat. No. Q198) for details.

| Resolution | Camera Model | Size of image element | Recommended lens | | |
|------------------------------------|----------------|-----------------------|---|---|--|
| | | | Standard Lens | Telecentric Lens | Vibrations and Shocks Resistant Lens |
| 300,000-pixel | FZ-SF/SFC | 1/3" equivalent | FZ-LES Series | --- | --- |
| | FZ-SP/SPC | | | | |
| | FZ-S/SC | | SV-V Series | VS-TCH Series | VS-MCA Series Non-telecentric Macro VS-MC Series |
| | FH-SM/SC | | | | |
| 400,000-pixel | FH-SMX/SCX | 1/2.9" equivalent | SV-H Series | | |
| 1.6 million-pixel | FH-SMX01/SCX01 | | | | |
| 2 million-pixel | FZ-S2M/SC2M | 1/1.8" equivalent | VS-H1 Series | VS-TEV Series | VS-MCH1 Series |
| | FH-SM02/SC02 | 2/3" equivalent *1 | | | |
| 3.2 million-pixel | FH-SMX03/SCX03 | 1/1.8" equivalent | SV-H Series | VS-TCH Series | VS-MCA Series Non-telecentric Macro VS-MC Series |
| 4 million-pixel | FH-SM04/SC04 | 1" equivalent | VS-H1 Series | VS-TEV Series | VS-MCH1 Series |
| 5 million-pixel | FH-SM05R/SC05R | 1/2.5" equivalent | SV-H Series | VS-TCH Series | VS-MCA Series Non-telecentric Macro VS-MC Series |
| | FZ-S5M3/SC5M3 | 2/3" equivalent | | | |
| | FH-SMX05/SCX05 | 2/3" equivalent | | | |
| 12 million-pixel | FH-SMX12/SCX12 | 1.1" equivalent | VS-LLD Series VS-HVA Series | VS-TEV Series | --- |
| | FH-SM12/SC12 | 1.76" equivalent | VS-L/M42-10 Series | --- | VS-MCL/M42-10 Series |
| 20.4 million-pixel | FH-SM21R/SC21R | 1" equivalent | VS-LLD Series VS-HVA Series | VS-TEV Series | VS-MCH1 Series |
| SWIR Cameras 330,000-pixel | FH-SMX-SWIR | 1/4" equivalent | VS Technology CO., LTD VS-H1-SWIR Series | VS Technology CO., LTD VS-THV Series | --- |
| SWIR Cameras 1.31 million-pixel | FH-SMX-01-SWIR | 1/2" equivalent | | | |

*1 A lens recommended for a 1" image element should be used for an image element size equivalent to 2/3". Vignetting may occur with a lens recommended for a 2/3" image element.

Ratings and Specifications (FH Sensor Controllers)

High-speed, Large-capacity Controller

| Sensor Controller Series | | FH-5552/5551/5052/5051 Series | | | FH-2052/FH-2051 Series | | | |
|--------------------------|---|--|--|--|--|--|------------------------|--|
| Sensor Controller Model | | FH-5552/5551/ 5052/5051 | FH-5552-10/ 5551-10/ 5052-10/ 5051-10 | FH-5552-20/ 5551-20/ 5052-20/ 5051-20 | FH-2052/2051 | FH-2052-10/ 2051-10 | FH-2052-20/ 2051-20 | |
| Parallel IO | | NPN/PNP (common) | | | | | | |
| Memory, Storage | | FH-5552 Series: 32 GB RAM, 128 GB ROM FH-5551 Series: 32 GB RAM, 64 GB ROM FH-5052 Series: 8 GB RAM, 64 GB ROM FH-5051 Series: 8 GB RAM, 64 GB ROM | | | FH-2052 Series: 8 GB RAM, 64 GB ROM FH-2051 Series: 8 GB RAM, 64 GB ROM | | | |
| Number of cores | | FH-5552 Series: 8 cores FH-5551 Series: 4 cores FH-5052 Series: 8 cores FH-5051 Series: 4 cores | | | FH-2052 Series: 2 cores FH-2051 Series: 2 cores | | | |
| Main Functions | Operation Mode | Standard | Yes | | | | | |
| | | Double Speed Multi-input | Yes | | | | | |
| | | Non-stop adjustment mode | Yes | | | | | |
| | | Multi-line random-trigger mode | Yes (Maximum 8 lines) *1 | | | | | |
| | Parallel Processing | | Yes | | | | | |
| | Number of Connectable Camera | | 2 | 4 | 8 | 2 | 4 | 8 |
| | Supported Camera | FH-S series camera | All of the FH-S series cameras are connectable. | | | All of the FH-S series cameras are connectable. *2 | | All of the FH-S series cameras are connectable. *2 |
| | | FZ-S series camera | All of the FZ-S series cameras are connectable. | | | | | |
| | Camera I/F | | OMRON I/F | | | | | |
| | Possible Number of Captured Images | | Refer to page 34. | | | | | |
| | Possible Number of Logging Images to Sensor Controller | | Refer to the <i>Vision System FH Series User's Manual</i> (Cat. No. Z365). | | | | | |
| | Possible Number of Scenes | | 128 | | | | | |
| | Operating on UI | USB Mouse | Yes (wired USB and driver is unnecessary type) | | | | | |
| | | Touch Panel | Yes (RS-232C/USB connection: FH-MT12) | | | | | |
| Setup | | Create the processing flow using Flow editing. | | | | | | |
| Language | | Japanese, English, Simplified Chinese, Traditional Chinese, Korean, German, French, Spanish, Italian, Vietnamese, Polish | | | | | | |
| External Interface | Serial Communication | | RS-232C × 1 | | | | | |
| | Ethernet Communication | Protocol | Non-procedure (TCP/UDP) | | | | | |
| | | I/F | 1000BASE-T × 2 | | | | | |
| | EtherNet/IP Communication | | Yes (Target/Ethernet port) | | | | | |
| | PROFINET Communication | | <ul style="list-style-type: none"> • Yes (Slave/Ethernet port) • Conformance class A | | | | | |
| | EtherCAT Communication | | Yes (slave) Refer to page 40 about EtherCAT Communications Specifications. | | | | | |
| | Parallel I/O | <ul style="list-style-type: none"> • 12 inputs/31 outputs: <ul style="list-style-type: none"> • Use 1 Line. • Operation mode: Except Multi-line random-trigger mode. | | | | | | |
| | | <ul style="list-style-type: none"> • 17 inputs/37 outputs: <ul style="list-style-type: none"> • Use 2 Lines. • Operation mode: Multi-line random-trigger mode. | | | | | | |
| | | <ul style="list-style-type: none"> • 14 inputs/29 outputs: <ul style="list-style-type: none"> • Use 3 to 4 Lines. • Operation mode: Multi-line random-trigger mode. | | | | | | |
| | | <ul style="list-style-type: none"> • 19 inputs/34 outputs: <ul style="list-style-type: none"> • Use 5 to 8 Lines. • Operation mode: Multi-line random-trigger mode. | | | | | | |
| | Encoder Interface | | Input voltage: 5 V ± 5% Signal: RS-422A Line Driver Level Phase A/B/Z: 1 MHz | | | | | |
| Monitor Interface | | DVI-I output (Analog RGB & DVI-D single link) × 1 | | | | | | |
| USB I/F | | USB3.0 host × 2 (BUS Power: Port5 V/0.5 A) USB2.0 host × 4 (BUS Power: Port5 V/0.5 A) | | | | | | |
| SD Card I/F | | SDHC × 1 | | | | | | |
| Indicator Lamps | Main | | POWER: Green ERROR: Red RUN: Green ACCESS: Yellow | | | | | |
| | Ethernet | | NET RUN1: Green LINK/ACT1: Yellow NET RUN2: Green LINK/ACT2: Yellow | | | | | |
| | SD Card | | SD POWER: Green SD BUSY: Yellow | | | | | |
| | EtherCAT | | ECAT RUN: Green LINK/ACT IN: Green LINK/ACT OUT: Green ECAT ERR: Red | | | | | |
| Power-supply voltage | | 20.4 VDC to 26.4 VDC | | | | | | |
| Current consumption | <ul style="list-style-type: none"> • When connecting the following cameras Intelligent compact digital CMOS camera Shortwave Infrared (SWIR) Camera • When connecting the following light or lighting controller without an external power supply FLV-TCC1, FLV-TCC4, FLV-TCC3HB FLV-TCC1EP, FL-TCC1 • When connecting the following light or lighting controller FL-TCC1PS, FL-MDCIMC | | 5.6 A max. | 7.7 A max. | 12.2 A max. | 4.6 A max. | 6.6 A max. | 11.2 A max. |
| | Other than above | | 4.5 A max. | 5.5 A max. | 7.3 A max. | 3.5 A max. | 4.3 A max. | 6.3 A max. |
| Built-in FAN | | Yes | | | | | | |

FH-Series

| Sensor Controller Series | | FH-5552/5551/5052/5051 Series | | | FH-2052/FH-2051 Series | | | |
|--------------------------|--|---|--|--|--|--|------------------------|--|
| Sensor Controller Model | | FH-5552/5551/ 5052/5051 | FH-5552-10/ 5551-10/ 5052-10/ 5051-10 | FH-5552-20/ 5551-20/ 5052-20/ 5051-20 | FH-2052/2051 | FH-2052-10/ 2051-10 | FH-2052-20/ 2051-20 | |
| Usage Environment | Ambient temperature range | Operating: 0°C to +45°C Storage: -20 to +65°C (with no icing or condensation) | | | Operating: 0°C to +50°C Storage: -20 to +65°C (with no icing or condensation) | | | |
| | Ambient humidity range | Operating: 35 to 85%RH Storage: 35 to 85%RH (with no condensation) | | | | | | |
| | Ambient atmosphere | No corrosive gases | | | | | | |
| | Vibration tolerance | Oscillation frequency: 10 to 150 Hz Half amplitude: 0.1 mm Acceleration: 15 m/s ² Sweep time: 8 minute/count Sweep count: 10 Vibration direction: up and down/front and behind/left and right | | | | | | |
| | Shock resistance | Impact force: 150 m/s ² Test direction: up and down/front and behind/left and right | | | | | | |
| | Noise immunity | Fast Transient Burst | <ul style="list-style-type: none"> DC power <ul style="list-style-type: none"> Direct infusion: 2kV, Pulse rising: 5ns, Pulse width: 50ns, Burst continuation time: 15ms/0.75ms, Period: 300ms, Application time: 1 min I/O line <ul style="list-style-type: none"> Direct infusion: 1kV, Pulse rising: 5ns, Pulse width: 50ns, Burst continuation time: 15ms/0.75ms, Period: 300ms, Application time: 1 min | | | | | |
| | Grounding | Type D grounding (100 Ω or less grounding resistance) *3 | | | | | | |
| External Features | Dimensions | 190 mm × 115 mm × 182.5 mm Note Height: Including the feet at the base. | | | | | | |
| | Weight | Approx. 3.4 kg | Approx. 3.6 kg | Approx. 3.6 kg | FH-2052 series: Approx. 3.4 kg FH-2051 series: Approx. 3.0 kg | FH-2052-□0 series: Approx. 3.6 kg FH-2051-□0 series: Approx. 3.2 kg | | |
| | Degree of protection | IEC60529 IP20 | | | | | | |
| | Case material | Cover: zinc-plated steel plate Side plate: aluminum (A6063) | | | | | | |
| Accessories | Instruction Sheet (Japanese and English): 1, Installation Instruction Manual for FH series: 1, General Compliance Information and Instructions for EU: 1, Member registration sheet: 1, Power source (FH-XCN): 1 (male), Ferrite core for camera cable: 2 (FH-5-□□□, FH-2-□□□), 4 (FH-5-□□□-10, FH-2-□□□-10), 8 (FH-5-□□□-20, FH-2-□□□-20) | | | | | | | |

*1 According to the CPU performance, FH-205□ series is recommended to use up to two lines in this mode.

*2 Up to eight cameras can be connected in total including up to four 12 or 20.4 million-pixel cameras.

*3 Existing third class grounding

Lite Controllers

| Sensor Controller Series | | FH-L551 Series | | |
|--------------------------|--|--|--|---|
| Sensor Controller Model | | FH-L551 | FH-L551-10 | |
| Parallel IO | | NPN/PNP (common) | | |
| Memory, Storage | | 4GB RAM, 32GB ROM | | |
| Main Functions | Operation Mode | Standard | Yes | |
| | | Double Speed Multi-input | Yes | |
| | | Non-stop adjustment mode | Yes | |
| | | Multi-line random-trigger mode | No | |
| | Parallel Processing | | Yes | |
| | Number of Connectable Camera | | 2 | 4 |
| | Supported Camera | FH-S series camera | All of the FH-S series cameras except FH-SM21R/SC21R | |
| | | FZ-S series camera | All of the FZ-S series cameras are connectable. | |
| | Camera I/F | | OMRON I/F | |
| | Possible Number of Captured Images | | Refer to page 34. | |
| | Possible Number of Logging Images to Sensor Controller | | Refer to the <i>Vision System FH Series User's Manual</i> (Cat. No. Z365). | |
| | Possible Number of Scenes | | 128 | |
| | UI Operations | USB Mouse | Yes (wired USB driver-less type) | |
| | | Touch Panel | Yes (RS-232C/USB connection: FH-MT12) | |
| Setup | | Create the processing flow using Flow editing. | | |
| Language | | Japanese, English, Simplified Chinese, Traditional Chinese, Korean, German, French, Spanish, Italian, Vietnamese, Polish | | |
| External Interface | Serial Communication | | RS-232C × 1 | |
| | Ethernet Communication | Protocol | Non-procedure (TCP/UDP) | |
| | | I/F | 1000BASE-T × 1 | |
| | EtherNet/IP Communication | | Yes (Target/Ethernet port) | |
| | PROFINET Communication | | <ul style="list-style-type: none"> • Yes (Slave/Ethernet port) • Conformance class A | |
| | EtherCAT Communication | | No | |
| | Parallel I/O | | <ul style="list-style-type: none"> • High-speed input: 1 • Normal speed: 9 • High-speed output: 4 • Normal speed: 23 | |
| | Encoder Interface | | None | |
| | Monitor Interface | | DVI-I output (Analog RGB & DVI-D single link) × 1 | |
| | USB I/F | | USB2.0 host × 1: BUS Power: Port 5 V/0.5 A USB3.0 × 1: BUS Power: Port 5 V/0.5 A | |
| SD Card I/F | | SDHC × 1 | | |
| Indicator Lamps | Main | POWER: Green ERROR: Red RUN: Green ACCESS: Yellow | | |
| | Ethernet | NET RUN: Green LINK/ACT: Yellow | | |
| | SD Card | SD POWER: Green SD BUSY: Yellow | | |
| | EtherCAT | None | | |
| Power-supply voltage | | 20.4 VDC to 26.4 VDC | | |
| Current consumption | <ul style="list-style-type: none"> • When connecting the following cameras Intelligent compact digital CMOS camera Shortwave Infrared (SWIR) Camera • When connecting the following light or lighting controller without an external power supply FLV-TCC1, FLV-TCC4, FLV-TCC3HB FLV-TCC1EP, FL-TCC1 • When connecting the following light or lighting controller FL-TCC1PS, FL-MD□MC | 2.7 A max. | 4.4 A max. | |
| | Other than above | 1.5 A max. | 2.0 A max. | |
| Built-in FAN | | No | | |
| Usage Environment | Ambient temperature range | | Operating: 0°C to 55°C Storage: -25 to +70°C | |
| | Ambient humidity range | | Operating and Storage: 10 to 90%RH (with no condensation) | |
| | Ambient atmosphere | | No corrosive gases | |
| | Vibration tolerance | | 5 to 8.4 Hz with 3.5 mm amplitude, 8.4 to 150 Hz, acceleration of 9.8 m/s ² 100 min each in X, Y, and Z directions (10 sweeps of 10 min each = 100 min total) | |
| | Shock resistance | | Impact force: 150 m/s ² Test direction: up and down/front and behind/left and right | |
| | Noise immunity | Fast Transient Burst | <ul style="list-style-type: none"> • DC power Direct infusion: 2kV, Pulse rising: 5ns, Pulse width: 50ns, Burst continuation time: 15ms/0.75ms, Period: 300ms, Application time: 1 min • I/O line Direct infusion: 1kV, Pulse rising: 5ns, Pulse width: 50ns, Burst continuation time: 15ms/0.75ms, Period: 300ms, Application time: 1 min | |
| | | | Grounding | |
| External Features | Dimensions | | 200 mm × 80 mm × 130 mm | |
| | Weight | | Approx. 1.5 kg | |
| | Degree of protection | | IEC60529 IP20 | |
| | Case materials | | PC | |
| Accessories | | Instruction Sheet (Japanese and English): 1, Installation Instruction Manual for FH-L series:1, General Compliance Information and Instructions for EU:1, Member registration sheet: 1, Power source (FH-XCN-L):1 (male) | | |

* Existing third class grounding

FH-Series

Maximum Number of Loading Images during Multi-input

| Camera | Model | Max. Number of Loading Images during Multi-input *1 |
|--|---|---|
| Intelligent Compact Digital CMOS Cameras *2 | FZ-SQ010F/-SQ050F/-SQ100F/-SQ100N | 256 |
| 0.3 million pixels CCD/CMOS Cameras | FZ-S/-SC/-SF/SFC/-SH/-SHC/-SP/-SPC FH-SM/-SC | 256 |
| 330,000-pixels Shortwave Infrared (SWIR) Camera | FH-SMX-SWIR | 256 |
| 0.4 million pixels CMOS Cameras | FH-SMX/-SCX | 256 |
| 1.31 million pixels Shortwave Infrared (SWIR) Camera | FH-SMX01-SWIR | 85 |
| 1.6 million pixels CMOS Cameras | FH-SMX01/-SCX01 | 64 |
| 2 million pixels CCD Cameras | FZ-S2M/-SC2M | 64 |
| 2 million pixels CMOS Cameras | FH-SM02/-SC02 | 51 |
| 3.2 million pixels CMOS Cameras | FH-SMX03/-SCX03 | 36 |
| 4 million pixels CMOS Cameras | FH-SM04/-SC04 | 32 |
| 5 million pixels CCD/CMOS Cameras | FZ-S5M3/-SC5M3 FH-SMX05/-SCX05/-SM05R/-SC05R | 25 |
| 12 million pixels CMOS Cameras | FH-SM12/-SC12/-SMX12/-SCX12 | 10 |
| 20.4 million pixels CMOS Cameras | FH-SM21R/-SC21R | 6 |

*1 When using two camera cables for connection, the maximum number of loaded images during multi-input is twice the number given in the table.

*2 The multi-input function cannot be used when the built-in light of an intelligent compact digital camera is used. Refer to the *Vision System FH/FZ5 Series User's Manual* (Cat. No. Z340) for details.

Ratings and Specifications (Cameras)

High-speed Digital CMOS cameras

| Model | FH-SM | FH-SC | FH-SM02 | FH-SC02 | FH-SM04 | FH-SC04 | FH-SM12 | FH-SC12 |
|--|--|----------------|---|------------------|---|------------------|---|---------|
| Image elements | CMOS image elements (1/3-inch equivalent) | | CMOS image elements (2/3-inch equivalent) *1 | | CMOS image elements (1-inch equivalent) | | CMOS image elements (1.76-inch equivalent) | |
| Color/Monochrome | Monochrome | Color | Monochrome | Color | Monochrome | Color | Monochrome | Color |
| Effective pixels | 640 (H) × 480 (V) | | 2,040 (H) × 1,088 (V) | | 2,040 (H) × 2,048 (V) | | 4,084 (H) × 3,072 (V) | |
| Pixel size | 7.4 (μm) × 7.4 (μm) | | 5.5 (μm) × 5.5 (μm) | | 5.5 (μm) × 5.5 (μm) | | 5.5 (μm) × 5.5 (μm) | |
| Shutter function | Electronic shutter; Shutter speeds can be set from 20 μs to 100 ms. | | Electronic shutter; Shutter speeds can be set from 25 μs to 100 ms. | | | | Electronic shutter; Shutter speeds can be set from 60 μs to 100 ms. | |
| Partial function | 1 to 480 lines | 2 to 480 lines | 1 to 1,088 lines | 2 to 1,088 lines | 1 to 2,048 lines | 2 to 2,048 lines | 4 to 3,072 lines (4-line increments) | |
| Frame rate (Image Acquisition Time *2) | 308 fps (3.3 ms) | | 219 fps (4.6 ms) *3 | | 118 fps (8.5 ms) *3 | | 38.9 fps (25.7 ms) *3 | |
| Lens mounting | C mount | | | | | | M42 mount | |
| Field of vision, installation distance | Selecting a lens according to the field of vision and installation distance | | | | | | | |
| Ambient temperature range | Operating: 0 to 40 °C, Storage: -25 to 65 °C (with no icing or condensation) | | | | | | | |
| Ambient humidity range | Operating and storage: 35% to 85% (with no condensation) | | | | | | | |
| Weight | Approx. 105 g | | Approx. 110 g | | | | Approx. 320 g | |
| Accessories | Instruction manual | | | | | | | |

| Model | FH-SMX | FH-SCX | FH-SMX01 | FH-SCX01 | FH-SMX03 | FH-SCX03 | FH-SMX05 | FH-SCX05 | FH-SMX12 | FH-SCX12 |
|--|--|--------|--|----------|--|----------|---|----------|---|----------|
| Image elements | CMOS image elements (1/2.9-inch equivalent) | | | | CMOS image elements (1/1.8-inch equivalent) | | CMOS image elements (2/3-inch equivalent) | | CMOS image elements (1.1-inch equivalent) | |
| Color/Monochrome | Monochrome | Color | Monochrome | Color | Monochrome | Color | Monochrome | Color | Monochrome | Color |
| Effective pixels | 720 (H) × 540 (V) | | 1440 (H) × 1,080 (V) | | 2,046 (H) × 1,536 (V) | | 2,448 (H) × 2,048 (V) | | 4,092 (H) × 3,000 (V) | |
| Pixel size | 6.9 (μm) × 6.9 (μm) | | 3.45 (μm) × 3.45 (μm) | | | | | | | |
| Shutter function | Electronic shutter; Shutter speeds can be set from 1 μs to 100 ms. | | | | | | | | Electronic shutter; Shutter speeds can be set from 15 μs to 100 ms. | |
| Partial function | 4 to 540 lines (4-line increments) | | 4 to 1,080 lines (4-line increments) | | 4 to 1,536 lines (4-line increments) | | 4 to 2,048 lines (4-line increments) | | 4 to 3,000 lines (4-line increments) | |
| Frame rate (Image Acquisition Time *2) | 523.6 fps (1.9 ms) | | 154.6 fps (6.5 ms) | | 151.4 fps (6.6 ms) *3 | | 97.2 fps (10.3 ms) *3 | | 40.1 fps (24.9 ms) *3 | |
| Lens mounting | C mount | | | | | | | | | |
| Field of vision, installation distance | Selecting a lens according to the field of vision and installation distance | | | | | | | | | |
| Ambient temperature range | Operating: 0 to 50 °C, Storage: -20 to 65 °C (with no icing or condensation) | | Operating: 0 to 45 °C, Storage: -20 to 65 °C (with no icing or condensation) | | Operating: 0 to 40 °C, Storage: -20 to 65 °C (with no icing or condensation) | | | | | |
| Ambient humidity range | Operating and storage: 35% to 85% (with no condensation) | | | | | | | | | |
| Weight | Approx. 48 g | | | | Approx. 85 g | | | | | |
| Accessories | Instruction manual, General Compliance Information and Instructions for EU | | | | | | | | | |

*1 A lens recommended for a 1" image element should be used for an image element size equivalent to 2/3". Vignetting may occur with a lens recommended for a 2/3" image element.

*2 The image acquisition time does not include the image conversion processing time of the sensor controller.

*3 Frame rate in high speed mode when the camera is connected using two camera cables.

Digital CMOS Cameras

| Model | FH-SM05R | FH-SC05R | FH-SM21R | FH-SC21R | FZ-S5M3 | FZ-SC5M3 |
|--|---|----------|--|----------|--|----------|
| Image Elements | CMOS image elements (1/2.5-inch equivalent) | | CMOS image elements (1-inch equivalent) | | CMOS image elements (2/3-inch equivalent) | |
| Color/Monochrome | Monochrome | Color | Monochrome | Color | Monochrome | Color |
| Effective Pixels | 2,592 (H) × 1,944 (V) | | 5,544 (H) × 3,692 (V) | | 2,448 (H) × 2,048 (V) | |
| Pixel Size | 2.2 (μm) × 2.2 (μm) | | 2.4 (μm) × 2.4 (μm) | | 3.45 (μm) × 3.45 (μm) | |
| Scan Type | Progressive | | | | | |
| Shutter Method | Rolling shutter (Global reset mode supported) | | | | Global shutter | |
| Shutter Function | Electronic shutter; Shutter speeds can be set from 500 μs to 100 ms in multiples of 50 μs | | Electronic shutter; Shutter speeds can be set from 50 μs to 100 ms. | | Electronic shutter; Shutter speeds can be set from 20 μs to 100 ms. | |
| Partial function | 4 to 1,944 lines (2-line increments) | | 1848 to 3,692 lines | | 4 to 2,048 lines | |
| Frame rate (Image Acquisition Time *) | 14 fps (71.7ms) | | 23.5 fps (42.6ms) | | 25.6 fps (38.2ms) | |
| Lens Mounting | C mount | | | | | |
| Field of vision, Installation distance | Selecting a lens according to the field of vision and installation distance | | | | | |
| Ambient temperature range | Operating: 0 to +40°C Storage: -30 to 65°C (with no icing or condensation) | | Operating: 0 to +40°C Storage: -20 to 65°C (with no icing or condensation) | | Operating: 0 to +40°C Storage: -30 to 65°C (with no icing or condensation) | |
| Ambient humidity range | Operating: 35 to 85%RH, Storage: 35 to 85%RH (with no condensation) | | | | | |
| Weight | Approx. 52 g | | Approx. 85 g | | | |
| Accessories | Instruction Sheet | | Instruction Sheet, General Compliance Information and Instructions for EU | | | |

* The image acquisition time does not include the image conversion processing time of the sensor controller.

Digital CCD Cameras

| Model | FZ-S | FZ-SC | FZ-S2M | FZ-SC2M |
|--|---|-------|---|---------|
| Image elements | Interline transfer reading all pixels, CCD image elements (1/3-inch equivalent) | | Interline transfer reading all pixels, CCD image elements (1/1.8-inch equivalent) | |
| Color/Monochrome | Monochrome | Color | Monochrome | Color |
| Effective pixels | 640 (H) × 480 (V) | | 1,600 (H) × 1,200 (V) | |
| Pixel size | 7.4 (μm) × 7.4 (μm) | | 4.4 (μm) × 4.4 (μm) | |
| Shutter function | Electronic shutter; select shutter speeds from 20 μs to 100 ms | | | |
| Partial function | 12 to 480 lines | | 12 to 1,200 lines | |
| Frame rate (Image Acquisition Time *) | 80 fps (12.5 ms) | | 30 fps (33.3 ms) | |
| Lens mounting | C mount | | | |
| Field of vision, installation distance | Selecting a lens according to the field of vision and installation distance | | | |
| Ambient temperature range | Operating: 0 to 50 °C Storage: -25 to 65 °C (with no icing or condensation) | | Operating: 0 to 40 °C Storage: -25 to 65 °C (with no icing or condensation) | |
| Ambient humidity range | Operating and storage: 35% to 85% (with no condensation) | | | |
| Weight | Approx. 55 g | | Approx. 76 g | |
| Accessories | Instruction manual | | | |

* The image acquisition time does not include the image conversion processing time of the sensor controller.

Shortwave Infrared (SWIR) Camera

| Model | FH-SMX-SWIR | FH-SMX01-SWIR |
|--|--|---|
| Image elements *1 | CMOS image elements (1/4-inch equivalent) | CMOS image elements (1/2-inch equivalent) |
| Color/Monochrome | Monochrome | |
| Effective pixels | 640 (H) × 512 (V) | 1,280 (H) × 1,024 (V) |
| Pixel size | 5.0 (μm) × 5.0 (μm) | 5.0 (μm) × 5.0 (μm) |
| Shutter function | Electronic shutter: Shutter speeds can be set from 8 μs to 100 ms. | |
| Partial function | 8 to 512 lines (8-line increments) | 8 to 1,024 lines (8-line increments) |
| Frame rate (Image Acquisition Time *2) | 240 fps (4.2 ms) | 120 fps (8.3 ms) |
| Lens mounting | C mount | |
| Supported controller *3 | FH-5□52/5□51/2052/2051/L551 Series | |
| Field of vision, installation distance | Selecting a lens according to the field of vision and installation distance *4 | |
| Ambient temperature range | Operating: 0 to 40°C *5 Storage: -20 to 65°C (with no icing or condensation) | |
| Ambient humidity range | Operating and storage: 35% to 85% (with no condensation) | |
| Weight | Approx. 505 g (w/base) | |
| Accessories | <ul style="list-style-type: none"> • Instruction manual • General Compliance Information and Instructions for EU | |

*1 If the interval between capturing images is more than 1 minute, the camera brightness value may decrease by more than 1%.

*2 The image acquisition time does not include the image conversion processing time of the sensor controller.

*3 FH-SMX-SWIR/FH-SMX01-SWIR can be supported by controller software version 6.60 or higher.

*4 Ask your OMRON representative for details.


*5 This camera controls the temperature of the image elements at 15°C to improve image quality.

If the temperature of the image elements (value of the camera's built-in temperature sensor) rises above 15°C, white spots and noise will increase. We recommend that the ambient temperature during operation be below +37°C, or the upper part of the case temperature below +47°C.

Additional Information

Spectral sensitivity characteristics: wavelength range 400 to 1700 nm

Relative sensitivity

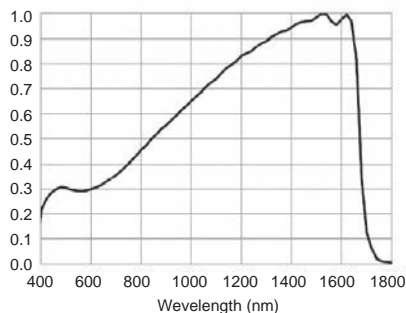

Small CCD Digital Cameras

| Model | FZ-SF | FZ-SFC | FZ-SP | FZ-SPC |
|--|---|--------|--------------------|--------|
| Image elements | Interline transfer reading all pixels, CCD image elements (1/3-inch equivalent) | | | |
| Color/Monochrome | Monochrome | Color | Monochrome | Color |
| Effective pixels | 640 (H) × 480 (V) | | | |
| Pixel size | 7.4 (μm) × 7.4 (μm) | | | |
| Shutter function | Electronic shutter; select shutter speeds from 20 μm to 100 ms | | | |
| Partial function | 12 to 480 lines | | | |
| Frame rate (Image Acquisition Time *) | 80 fps (12.5ms) | | | |
| Lens mounting | Special mount (M10.5 P0.5) | | | |
| Field of vision, installation distance | Selecting a lens according to the field of vision and installation distance | | | |
| Ambient temperature range | Operating: 0 to 50 °C (camera amp) 0 to 45 °C (camera head) Storage: -25 to 65 °C (with no icing or condensation) | | | |
| Ambient humidity range | Operating and storage: 35% to 85% (with no condensation) | | | |
| Weight | Approx. 150 g | | | |
| Accessories | Instruction manual, installation bracket, Four mounting brackets (M2) | | Instruction manual | |

* The image acquisition time does not include the image conversion processing time of the sensor controller.


Intelligent Compact Digital CMOS Cameras

| Model | FZ-SQ010F | FZ-SQ050F | FZ-SQ100F | FZ-SQ100N |
|--|---|------------------------|-------------------------|-------------------------|
| Image elements | CMOS color image elements (1/3-inch equivalent) | | | |
| Color/Monochrome | Color | | | |
| Effective pixels | 752 (H) × 480 (V) | | | |
| Pixel size | 6.0 (μm) × 6.0 (μm) | | | |
| Shutter function | 1/250 to 1/32,258 | | | |
| Partial function | 8 to 480 lines | | | |
| Frame rate (Image Acquisition Time *1) | 60 fps (16.7 ms) | | | |
| Field of vision | 7.5 × 4.7 to 13 × 8.2 mm | 13 × 8.2 to 53 × 33 mm | 53 × 33 to 240 × 153 mm | 29 × 18 to 300 × 191 mm |
| Installation distance | 38 to 60 mm | 56 to 215 mm | 220 to 970 mm | 32 to 380 mm |
| LED class *2 | Risk Group2 | | | |
| Ambient temperature range | Operating: 0 to 50 °C Storage: -25 to 65 °C | | | |
| Ambient humidity range | Operating and storage: 35% to 85% (with no condensation) | | | |
| Weight | Approx. 150 g | | Approx. 140 g | |
| Accessories | Mounting bracket (FQ-XL), polarizing filter attachment (FQ-XF1), instruction manual and warning label | | | |


*1 The image acquisition time does not include the image conversion processing time of the sensor controller.

*2 Applicable standards: IEC62471-2


• Narrow View FZ-SQ010F




• Standard FZ-SQ050F



• Wide View (Long-distance) FZ-SQ100F



• Wide View (Short-distance) FZ-SQ100N



FH-Series

Ratings and Specifications (Cable, Monitor)

Camera Cables

| Model | FZ-VS3 (5 m) | FZ-VSB3 (5 m) | FZ-VSBX (5 m) | FZ-VSL3 (5 m) | FZ-VSLB3 (5 m) |
|----------------------------------|---|------------------|----------------------|------------------|----------------------------|
| Type | Standard | Bend resistant | Super-bend-resistant | Right-angle | Bend resistant Right-angle |
| Shock resistiveness (durability) | 10 to 150 Hz single amplitude 0.15 mm 3 directions, 8 strokes, 4 times | | | | |
| Ambient temperature range | Operation and storage: 0 to 65 °C (with no icing or condensation) | | | | |
| Ambient humidity range | Operation and storage: 40 to 70%RH (with no condensation) | | | | |
| Ambient atmosphere | No corrosive gases | | | | |
| Material | Cable sheath, connector: PVC | | | | |
| Minimum bending radius | 69mm | 69mm | 69mm | 69mm | 69mm |
| Weight | Approx. 390 g | Approx. 430 g | Approx. 460 g | Approx. 390 g | Approx. 430 g |

Cable Extension Unit

| Model | FZ-VS-J |
|---------------------------|---|
| Power supply voltage *1 | 11.5 to 13.5 VDC |
| Current consumption *2 | 1.5 A max. |
| Ambient temperature range | Operating: 0 to 50 °C; Storage: -25 to 65 °C (with no icing or condensation) |
| Ambient humidity range | Operating and storage: 35 to 85% (with no condensation) |
| Weight | Approx. 240 g |
| Accessories | Instruction Sheet and 4 mounting screws |

*1 A 12-VDC power supply must be provided to the Cable Extension Unit when connecting the Intelligent Compact Camera, or the Lighting Controller.

*2 The current consumption shows when connecting the Cable Extension Unit to an external power supply.

Touch Panel Monitor

| Model | FH-MT12 | |
|-----------------------|---------------------------|---|
| Major Function | Display area | 12.1 inch |
| | Resolution | 1,024 (V) × 768 (H) |
| | Number of color | 16,200,000 colors (8 bit/color) |
| | Brightness | 500cd/m ² (Typ) |
| | Contrast Ratio | 700:1 (Typ) |
| | Viewing angle | Horizontal (left and right): -80° to 80° (typ) Vertical (top and bottom): -70° to 70° (typ) |
| | Backlight Unit | LED, edge-light |
| | Backlight lifetime | About 80,000 hour |
| External interface | Touch panel | 4wire resistive touch screen |
| | Video input | analog RGB |
| Ratings | Touch panel signal | USB RS-232C |
| | Power supply voltage | 24 VDC (21.6 to 26.4 VDC) |
| Operating environment | Current consumption | 0.5 A |
| | Insulation resistance | Between DC power supply and Touch Panel Monitor FG: 20 MΩ or higher (rated voltage 250 V) |
| | Ambient temperature range | Operating: 0 to 50°C, Storage: -20 to +65°C (with no icing or condensation) |
| | Ambient humidity range | Operating and Storage: 20 to 90 %RH (with no icing or condensation) |
| | Ambient environment | No corrosive gas |
| Operation | Vibration resistance | 10 to 150 Hz, one-side amplitude 0.1 mm (Max. acceleration 15 m/s ²) 10 times for 8 minutes for each three direction |
| | Degree of protection | Panel mounting: IP65 on the front |
| Structure | Operation | Touch pen |
| | Mounting | Panel mounting, VESA mounting |
| | Weight | Approx. 2.4 kg |
| | Material | Front panel: PC/PBT, Front Sheet: PET, Rear case: SUS |

Note: FH Series Sensor Controllers version 5.32 or higher is required.

Long-distance Camera Cables

| Model | FZ-VS4 (15 m) | FZ-VSL4 (15 m) |
|----------------------------------|---|----------------|
| Type | Standard | Right-angle |
| Shock resistiveness (durability) | 10 to 150 Hz single amplitude 0.15 mm 3 directions, 8 strokes, 4 times | |
| Ambient temperature range | Operation and storage: 0 to 65 °C (with no icing or condensation) | |
| Ambient humidity range | Operation and storage: 40 to 70%RH (with no condensation) | |
| Ambient atmosphere | No corrosive gases | |
| Material | Cable sheath, connector: PVC | |
| Minimum bending radius | 78 mm | |
| Weight | Approx. 1,400 g | |

Encoder Cable

| Model | FH-VR |
|---------------------------|---|
| Vibration resistiveness | 10 to 150 Hz single amplitude 0.1 mm 3 directions, 8 strokes, 10 times |
| Ambient temperature range | Operation: 0 to 50 °C; Storage: -10 to 60 °C (with no icing or condensation) |
| Ambient humidity range | Operation and storage: 35 to 85%RH (with no condensation) |
| Ambient atmosphere | No corrosive gases |
| Material | Cable Jacket: Heat, oil and flame resistant PVC Connector: polycarbonate resin |
| Minimum bending radius | 65 mm |
| Weight | Approx. 104 g |

Monitor Cables

| Model | FH-VMDA (2 m) | | FH-VUAB (2 m) | XW2Z-200PP-1 (2 m) |
|----------------------|--|--|---------------|--|
| Cable type | DVI-Analog Conversion Cable | | USB Cable | RS-232C Cable |
| Vibration resistance | 10 to 150 Hz, one-side amplitude 0.1 mm, 10 times for 8 minutes for each three direction | | | |
| Ambient Temperature | Operating Condition: 0 to 50°C, Storage Condition: -10 to 60°C (with no icing or condensation) | | | |
| Ambient Humidity | Operating Condition: 35 to 85%RH, Storage Condition: 35 to 85%RH (with no icing or condensation) | | | |
| Ambient environment | No corrosive gases | | | |
| Material | Cable outer sheath, Connector: PVC | | | Cable outer sheath: PVC, Connector: ABS/Ni Plating |
| Minimum bend radius | 62 mm | | 25 mm | 59 mm |
| Weight | Approx. 210 g | | Approx. 95 g | Approx. 162 g |

LCD Monitor

| Model | FZ-M08 | |
|---------------------------|--|--|
| Size | 8.4 inches | |
| Type | Liquid crystal color TFT | |
| Resolution | 1,024 × 768 dots | |
| Input signal | Analog RGB video input, 1 channel | |
| Power supply voltage | 21.6 to 26.4 VDC | |
| Current consumption | Approx. 0.7 A max. | |
| Ambient temperature range | Operating: 0 to 50 °C; Storage: -25 to 65 °C (with no icing or condensation) | |
| Ambient humidity range | Operating and storage: 35 to 85% (with no condensation) | |
| Weight | Approx. 1.2 kg | |
| Accessories | Instruction Sheet and 4 mounting brackets | |

FH-Series

EtherCAT Communications Specifications

| Item | Specifications | |
|-------------------------------|---|---|
| Communications standard | IEC61158 Type 12 | |
| Physical layer | 100 BASE-TX (IEEE802.3) | |
| Modulation | Base band | |
| Baud rate | 100 Mbps | |
| Topology | Depends on the specifications of the EtherCAT master. | |
| Transmission Media | Twisted-pair cable of category 5 or higher (double-shielded straight cable with aluminum tape and braiding) | |
| Transmission Distance | Distance between nodes: 100 m or less | |
| Node address setting | 00 to 99 | |
| External connection terminals | RJ45 × 2 (shielded) IN: EtherCAT input data, OUT: EtherCAT output data | |
| Send/receive PDO data sizes | Input | 56 to 280 bytes/line (including input data, status, and unused areas) Up to 8 lines can be set. * |
| | Output | 28 bytes/line (including output data and unused areas) Up to 8 lines can be set. * |
| Mailbox data size | Input | 512 bytes |
| | Output | 512 bytes |
| Mailbox | Emergency messages, SDO requests, and SDO information | |
| Refreshing methods | I/O-synchronized refreshing (DC) | |

* This depends on the upper limit of the master.

Version Information

FH Series and Programming Devices


Use the latest version of Sysmac Studio Standard Edition/Vision Edition.

| FH Series | Version of FH Series | Corresponding version of Sysmac Studio Standard Edition/Vision Edition |
|--|----------------------|--|
| FH-555□ (-□) FH-505□ (-□) FH-205□ (-□) | Version 6.55/6.60 | Supported by version 1.59 * or higher. |
| | Version 6.51 | Supported by version 1.53 or higher. |

* Sysmac Studio Ver.1.59 will be supported soon.

Components and Functions

Sensor Controllers
High-speed,
Large-capacity Controller
Standard Controller
(4-camera type)


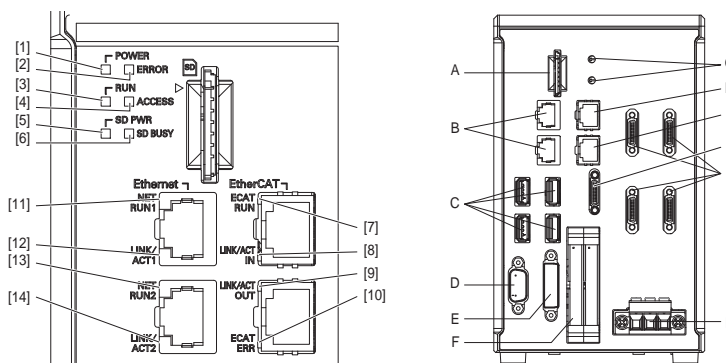


| | Name | Description |
|------|---------------------------|---|
| [1] | POWER LED | Lit while power is ON. |
| [2] | ERROR LED | Lit when an error has occurred. |
| [3] | RUN LED | Lit while the layout turned on output setting is displayed. |
| [4] | ACCESS LED | Blinks while the internal nonvolatile memory is accessed. |
| [5] | SD POWER LED | Blinks while power is supplied to the SD memory card and the card is usable. |
| [6] | SD BUSY LED | Blinks while the SD memory card is accessed. |
| [7] | EtherCAT RUN LED | Lit while EtherCAT communications are usable. |
| [8] | EtherCAT LINK/ACT IN LED | Lit when connected with an EtherCAT device, and blinks while performing communications. |
| [9] | EtherCAT LINK/ACT OUT LED | Lit when connected with an EtherCAT device, and blinks while performing communications. |
| [10] | EtherCAT ERR LED | Lit when EtherCAT communications have become abnormal. |
| [11] | EtherNet NET RUN1 LED | Lit while EtherNet communications are usable. |
| [12] | EtherNet LINK/ACK1 LED | Lit when connected with an EtherNet device, and blinks while performing communications. |
| [13] | EtherNet NET RUN2 LED | Lit when EtherNet communications are usable. |
| [14] | EtherNet LINK/ACK2 LED | Lit when connected with an EtherNet device, and blinks while performing communications. |

| | Name | Description |
|---|---|--|
| A | SD memory card installation connector | Install the SD memory card. Do not plug or unplug the SD memory card during measurement operation. Otherwise measurement time may be affected or data may be destroyed. |
| B | EtherNet connector | Connect an EtherNet device. <div style="border: 1px solid black; padding: 5px; margin: 5px 0;"> <p style="text-align: center;">FH-205□ Series/FH-5□5□ Series</p> <p>Upper port: Ethernet port Lower port: Ethernet port, EtherNet/IP port, and PROFINET port are sharing use.</p> </div> |
| C | USB connector | Connect a USB device. Do not plug or unplug it during measurement operation. Otherwise measurement time may be affected or data may be destroyed. |
| D | RS-232C connector | Connect an external device such as a programmable controller. |
| E | DVI-I connector | Connect a monitor. |
| F | I/O connector (control lines, data lines) | Connect the controller to external devices such as a sync sensor and PLC. |
| G | EtherCAT address setup volume | Used to set a node address (00 to 99) as an EtherCAT communication device. |
| H | EtherCAT communication connector (IN) | Connect the opposed EtherCAT device. |
| I | EtherCAT communication connector (OUT) | Connect the opposed EtherCAT device. |
| J | Encoder connector | Connect an encoder. |
| K | Camera connector | Connect cameras. |
| L | Power supply terminal connector | Connect a DC power supply. Wire the controller independently on other devices. Wire * the ground line. Be sure to ground the controller alone. |

* Use the attachment power terminal connector (male) of FH-XCN series. For details, refer to 5-3 Sensor Controller Installation on Vision System FH series Hardware Setup Manual (Z366).

Lite Controllers (4-camera type)

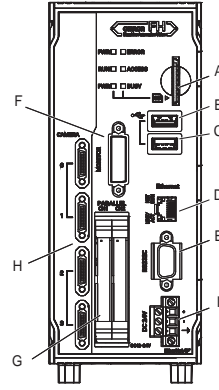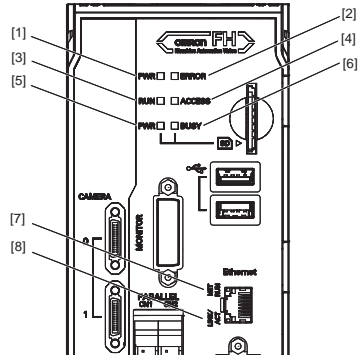

| | LED name | Description |
|-----|-----------------------|--|
| [1] | PWR LED | Lit while power is ON. |
| [2] | ERROR LED | Lit when an error has occurred. |
| [3] | RUN LED | Lit while the layout turned on output setting is displayed. |
| [4] | ACCESS LED | Blinks while the internal nonvolatile memory is accessed. |
| [5] | SD PWR LED | Lit while power is supplied to the SD memory card and the card is usable. |
| [6] | SD BUSY LED | Lit when access to the SD memory card. |
| [7] | Ethernet NET RUN LED | Lit while Ethernet communications are usable. |
| [8] | Ethernet LINK/ACT LED | Blinks when connected with an Ethernet device, and blinks while performing communications. |

| | Connector name | Description |
|---|--|---|
| A | SD memory card installation connector | Install the SD memory card. Do not plug or unplug the SD memory card during measurement operation. Otherwise measurement time may be affected or data may be destroyed. |
| B | USB 2.0 connector | Connects to USB 2.0. Do not insert or remove during loading or writing of measurement or data. The measurement time can be longer or data can be damaged. |
| C | USB 3.0 connector | Connects to USB 3.0. Do not insert or remove during loading or writing of measurement or data. The measurement time can be longer or data can be damaged. USB 3.0 has a high ability to supply the bus power. Use the Sensor Controller by combining USB 3.0, faster transport can be realized. |
| D | Ethernet connector | Connect an Ethernet device. Ethernet port, EtherNet/IP port, and PROFINET port are sharing use. |
| E | RS-232C connector | Connect an external device such as a programmable controller. |
| F | DVI-I connector | Connect a monitor. |
| G | Parallel connector (control lines, data lines) | Connect the controller to external devices such as a sync sensor. |
| H | Camera connector | Connect a camera. |
| I | Power supply terminal connector | Connect a DC power supply. Wire the controller independently on other devices. Wire * the ground line. Be sure to ground the FH Sensor Controller alone. |

* Use the attachment power terminal connector (male) of FH-XCN-L series.
For details, refer to 5-3 Sensor Controller Installation on Vision System FH series Hardware Setup Manual(Z366).

Processing Items

| Group | Icon | Processing Item | Corresponding Page in the Catalog |
|-------------|--|---|-----------------------------------|
| Measurement | | Search Used to identify the shapes and calculate the position of measurement objects. | |
| | | Flexible Search Recognizing the shapes of workpieces with variation and detecting their positions. | |
| | | Sensitive Search Search a small difference by dividing the search model in detail, and calculating the correlation. | |
| | | ECM Search Used to search the similar part of model form input image. Detect the evaluation value and position. | |
| | | EC Circle Search Extract circles using "round" shape information and get position, radius and quantity in high preciseness. | |
| | | Shape Search II Used to search the similar part of model from input image regardless of environmental changes. Detect the evaluation value and position. | |
| | | Shape Search III Robust detection of positions is possible at high-speed and with high precision incorporating environmental fluctuations, such as differences in individual shapes of the workpieces, pose fluctuations, noise superimposition and shielding. | P12 |
| | | EC Corner This processing item measures a corner position (corner) of a workpiece. | |
| | | Ec Cross The center position of a crosshair shape is measured using the lines created by the edge information on each side of the crosshair. | |
| | | Classification Used when various kinds of products on the assembly line need to be sorted and identified. | |
| | | Edge Position Measure position of measurement objects according to the color change in measurement area. | |
| | | Edge Pitch Detect edges by color change in measurement area. Used for calculating number of pins of IC and connectors. | |
| | | Scan Edge Position Measure peak/bottom edge position of workpieces according to the color change in separated measurement area. | P12 |
| | | Scan Edge Width Measure max/min/average width of workpieces according to the color change in separated measurement area. | |
| | | Circular Scan Edge Position Measure center axis, diameter and radius of circular workpieces. | P12 |
| | | Circular Scan Edge Width Measure center axis, width and thickness of ring workpieces. | |
| | | Intersection Calculate approximate lines from the edge information on two sides of a square workpiece to measure the angle formed at the intersection of the two lines. | |
| | | Color Data Used for detecting presence and mixed varieties of products by using color average and deviation. | |
| | | Gravity and Area Used to measure area, center of gravity of workpieces by extracting the color to be measured. | |
| | | Labeling Used to measure number, area and gravity of workpieces by extracting registered color. | |
| | | Label Data Selecting one region of extracted Labeling, and get that measurement. Area and Gravity position can be got and judged. | |
| | | Defect Used for appearance measurement of plain-color measurement objects such as defects, stains and burrs. | |
| | | Precise Defect Check the defect on the object. Parameters for extraction defect can be set precisely. | |
| | | Fine Matching Difference can be detected by overlapping and comparing (matching) registered fine images with input images. | |
| | | Character Inspect Recognize character according correlation search with model image registered in [Model Dictionary]. | P15 |
| | | Date Verification Reading character string is verified with internal date. | |
| | | Model Dictionary Register character pattern as dictionary. The pattern is used in [Character Inspection]. | |
| | | 2DCode II *1 Recognize 2D code and display where the code quality is poor. | P15 |
| | | 2DCode *2 Recognize 2D code and display where the code quality is poor. | |
| | | Barcode *3 Recognize barcode, verify and output decoded characters. | |
| | OCR Recognize and read characters in images as character information. | P15 | |
| | OCR User Dictionary Register dictionary data to use for OCR. | | |
| | Circle Angle Used for calculating angle of inclination of circular measurement objects. | | |

| Group | Icon | Processing Item | Corresponding Page in the Catalog | |
|------------------|---------------------|--|---|--|
| Measurement | | Glue Bead Inspection You can inspect coating of a specified color for gaps or runoffs along the coating path. | | |
| | | AI FineMatching *4 Performs learning with "non-defective" product images and detects the difference between the input image and the non-defective image. Allows for variations in non-defective products and detects only defects. | P6 | |
| Input Image | | Camera Image Input FH To input images from cameras. And set up the conditions to input images from cameras. (For FH Sensor Controllers only) | | |
| | | Camera Image Input HDR Create high-dynamic range images by acquiring several images with different conditions. | P10 | |
| | | Camera Image Input HDRLite HDR function for FZ-SQ□ Intelligent Compact Cameras. | | |
| | | Photometric Stereo Image Input Capture images under different illumination directions using a photometric stereo light. | | |
| | | Camera Switch To switch the cameras used for measurement. Not input images from cameras again. | | |
| | | Measurement Image Switching To switch the images used for measurement. Not input images from camera again. | | |
| | | Multi-trigger Imaging The Multi-trigger Imaging processing item captures multiple images at user-defined timings and executes parallel measurement for each image. Insert the Multi-trigger Imaging to the top of the flow. | P10 | |
| | | Multi-trigger Imaging Task The Multi-trigger Imaging processing item captures multiple images at user-defined timings and executes parallel measurement for each image. Insert this processing item to the top of the processing which requires imaging for multiple times. | | |
| | | Position Compensation Used when positions are differed. Correct measurement is performed by correcting position of input images. | | |
| | | Filtering Used for processing images input from cameras in order to make them easier to be measured. | | |
| Compensate image | | Background Suppression To enhance contrast of images by extracting color in specified brightness. | | |
| | | Brightness Correct Filter Track brightness change of entire screen and remove gradual brightness change such as uneven brightness. | | |
| | | Color Gray Filter Color image is converted into monochrome images to emphasize specific color. | | |
| | | Extract Color Filter Convert color image to color extracted image or binary image. | | |
| | | Anti Color Shading To remove the irregular color/pattern by uniformizing max.2 specified colors. | | |
| | | Stripes Removal Filter II Remove the background pattern of vertical, horizontal and diagonal stripes. | | |
| | | Polar Transformation Rectify the image by polar transformation. Useful for OCR or pattern inspection printed on circle. | | |
| | | Trapezoidal Correction Rectify the trapezoidal deformed image. | | |
| | | Machine Simulator How the alignment marks would move on the image when each stage or robot axis is controlled can be checked. | | |
| | | Image Subtraction The registered model image and measurement image are compared and only the different pixels are extracted and converted to an image. | | |
| | | Advanced filter Process the images acquired from cameras in order to make them easier to measure. This processing item consolidates existing image conversion filtering into one processing item and adds extra functions. | | |
| | | Panorama Combine multiple image to create one big image. | | |
| | | AI Scratch Detect Filter *5 Extracts defects in the set measurement area. | P4 | |
| | Support measurement | | Unit Macro Advanced arithmetic processing can be easily incorporated into workflow as Unit Macro processing items. | |
| | | | Unit Calculation Macro This function is convenient when the user wants to calculate a value using an original calculation formula or change the set value or system data of a processing item. | |
| | | Calculation Used when using the judge results and measured values of ProItem which are registered in processing units. | | |
| | | Line Regression Used for calculating regression line from plural measurement coordinate. | | |
| | | Circle Regression Used for calculating regression circle from plural measurement coordinate. | | |
| | | Precise Calibration Used for calibration corresponding to trapezoidal distortion and lens distortion. | | |

| Group | Icon | Processing Item | Corresponding Page in the Catalog |
|---------------------|------|---|-----------------------------------|
| Support measurement | | User Data Used for setting of the data that can be used as common constants and variables in scene group data. | |
| | | Set Unit Data Used to change the Procltem data (setting parameters, etc.) that has been set up in a scene. | |
| | | Get Unit Data Used to get one data (measured results, setting parameters, etc.) of Procltem that has been set up in a scene. | |
| | | Set Unit Figure Used for re-setting the figure data (model, measurement area) registered in an unit. | |
| | | Get Unit Figure Used for get the figure data (model, measurement area) registered in an unit. | |
| | | Trend Monitor Used for displaying the information about results on the monitor, facilitating to avoid NG and analyze causes. | |
| | | Image Logging Used for saving the measurement images to the memory and USB memory. | |
| | | Image Conversion Logging Used for saving the measurement images in JPEG and BMP format. | |
| | | Data Logging Used for saving the measurement data to the memory and USB memory. | |
| | | Elapsed Time Used for calculating the elapsed time since the measurement trigger input. | |
| | | Wait Processing is stopped only at the set time. The standby time is set by the unit of [ms]. | |
| | | Focus Focus setting is supported. | |
| | | Iris Focus and aperture setting is supported. | |
| | | Parallelize A part of the measurement flow is divided into two or more tasks and processed in parallel to shorten the measurement time. This processing item is placed at the top of processing to be performed in parallel. | |
| | | Parallelize Task A part of the measurement flow is divided into two or more tasks and processed in parallel to shorten the measurement time. This processing item is placed immediately before processing to be performed in parallel between Parallelize and Parallelize End. | |
| | | Statistics Used when you need to calculate an average of multiple measurement results. | |
| | | Reference Calib Data Calibration data and distortion compensation data held under other processing items can be referenced. | |
| | | Position Data Calculation The specified position angle is calculated from the measured positions. | |
| | | Stage Data Sets and stores data related to stages. | P13 |
| | | Robot Data Sets and stores data related to robots. | |
| | | Vision Master Calibration This processing item automatically calculates the entire axis movement amount of the control equipment necessary for calibration. | |
| | | PLC Master Calibration Calibration data is created using a communication command from PLC. | |
| | | Convert Position Data The position angle after the specified axis movement is calculated. | |
| | | Movement Single Position The axis movement that is required to match the measured position angle to the reference position angle is calculated. | |
| | | Movement Multi Points The axis movements that are required to match the measured position angles to the corresponding reference position angles are calculated. | |
| | | Detection Point Obtains position/angle information by referring to the coordinate values measured with the Measurement Processing Unit. | |
| | | Manual Position Setting Used to change the measurement coordinates X and Y of the measurement processing unit. | |
| | | Camera Calibration By setting the camera calibration, the measurement result can be converted and output as actual dimensions. | |
| | | Data Save The set data can be saved in the controller main unit or as scene data. The data is held even after the FH/FZ power is turned off. | |
| | | Conveyor Calibration Conveyor Calibration is used to calibrate camera, conveyor, and robots for conveyer or tracking application. | |
| | | Scene The specified scene is copied to the current scene. | |
| | | System Information Obtain system information (e.g., memory and disk space and I/O input signal status) of the Sensor Controller. | |

| Group | Icon | Processing Item | Corresponding Page in the Catalog | |
|----------------|---------------|---|---|--|
| Branch | | Conditional Branch Used where more than two kinds of products on the production line need to detected separately. | | |
| | | End This Procltem must be set up as the last processing unit of a branch. | | |
| | | DI Branch Same as Procltem "Branch". But you can change the targets of conditional branching via external inputs. | | |
| | | Control Flow Normal Set the measurement flow processing into the wait state in which the specific no-protocol command can be executed. | | |
| | | Control Flow PLC Link Set the measurement flow processing into the wait state in which the specific PLC Link command can be executed. | | |
| | | Control Flow Parallel Set the measurement flow processing into the wait state in which the specific parallel command can be executed. | | |
| | | Control Flow Fieldbus Set the measurement flow processing into the wait state in which the specific Fieldbus command can be executed. | | |
| | | Selective Branch Easily branch to multiple destinations. | | |
| | | Conditional Execution (If) The measurement flow is divided according to the comparison result obtained using the set expressions and conditions. | | |
| | | Conditional Execution (Else) Insert between the Conditional Execution (If) processing item and End If processing item. The measurement flow is divided according to the comparison result obtained using the set expressions and conditions. | | |
| | | Loop The set processes are repeated until the loop count reaches the specified number, and then the next process starts. | | |
| | | Loop Suspension Insert between the Loop processing item and End Loop processing item. Used to stop the loop before the loop count reaches the specified number. | | |
| | | Select Execution (Select) Used to set conditions. The measurement flow is divided according to the comparison result obtained using the conditions given by expressions. | | |
| | | Select Execution (Case) Used to make a judgment. The measurement flow is divided according to the comparison result obtained using the conditions given by expressions. | | |
| | Output result | | Result Output (I/O) Output data to the external devices such as a programmable controller or a PC via PLC Link, Parallel interface, Fieldbus interface (EtherCAT, EtherNet/IP (other than message communication), PROF-INET). | |
| | | | Result Output (Message) Output data to the external devices such as a programmable controller or a PC with non-procedure mode via the serial interface or EtherNet/IP (message communication). This processing item allows you to save the logging data as a ".csv" file into the Sensor Controller as well. | |
| | | Data Output Used when you need to output data to the external devices such as PLC or PC via serial ports. | | |
| | | Parallel Data Output Used when you need to output data to the external devices such as PLC or PC via parallel ports. | | |
| | | Parallel Judgement Output Used when you need to output judgement results to the external devices such as PLC or PC via parallel ports. | | |
| | | Fieldbus Data Output Outputs data to an external device, such as a Programmable Controller, through a fieldbus interface. | | |
| | | Result Display Used for displaying the texts or the figures in the camera image. | | |
| | | Display Image File Display selected image file. | | |
| | | Display Last NG Image Display the last NG images. | | |
| | | Conveyor Panorama Display Display images of the tracking area as a panoramic image. | | |
| Display result | | Display Image Hold Processing item to retain images, including measurement results. | | |

- *1 2D Codes that can be read : Data Matrix (ECC200)
- *2 2D Codes that can be read : Data Matrix (ECC200), QR Code
- *3 Bar Codes that can be read : JAN/EAN/UPC (including add-on codes), Code 39, Codabar (NW-7), ITF (Interleaved 2 of 5), Code 93, Code 128, GS1-128, GS1 DataBar (RSS-14 / RSS Limited / RSS Expanded), Pharmacode
- *4 Available on the following controllers:
 - FH-5□51/-5□52/-2051/-2052 Series
 - FH-L551-□□ (Use in conjunction with 0.3 or 0.4 million-pixel cameras.)
- *5 Available on the FH-5□51/-5□52-series Controller. Optional FH-UMA11 Scratch Detect AI Software Installer is required.

Dimensions


Sensor Controllers

High-speed, Large-capacity Controllers/Standard Controllers

FH-5552/-5552-10/-5552-20/-5551/-5551-10/-5551-20


FH-5052/-5052-10/-5052-20/-5051/-5051-10/-5051-20

FH-2052/-2052-10/-2052-20/-2051/-2051-10/-2051-20

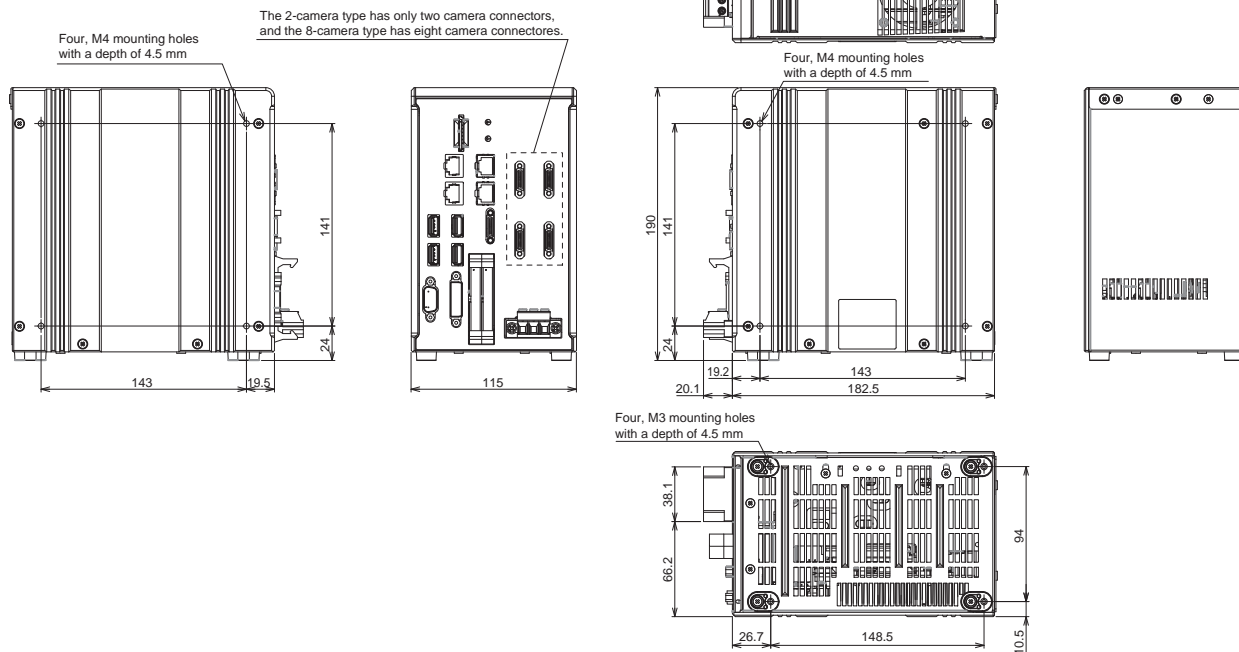

Lite Controllers

FH-L551/-L551-10

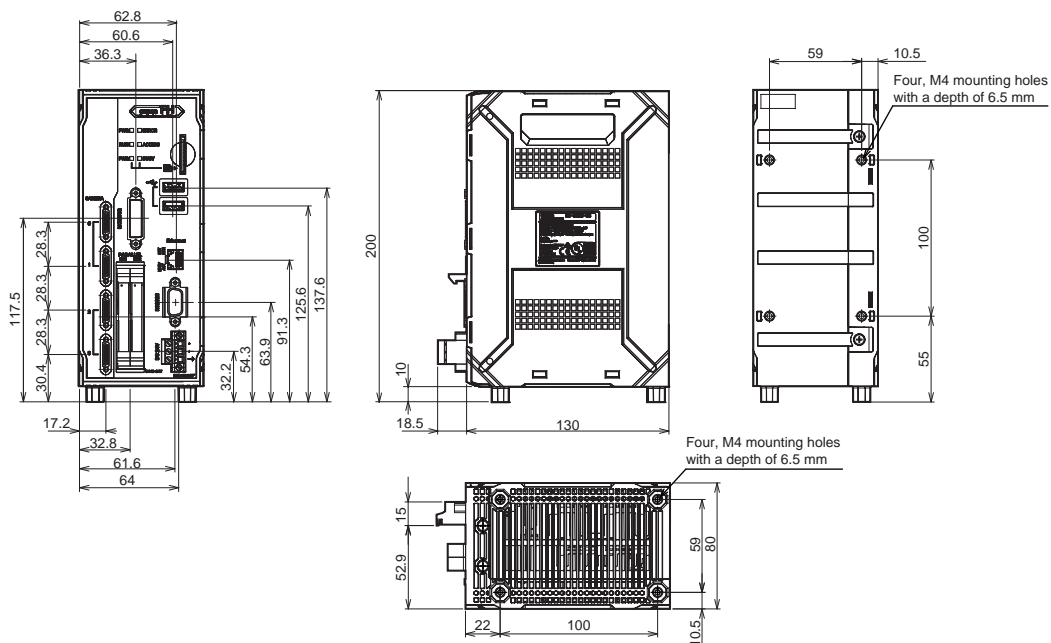


Cameras

High-speed Digital CMOS Camera/Digital CMOS Camera


300,000-pixel camera

FH-SC
FH-SM

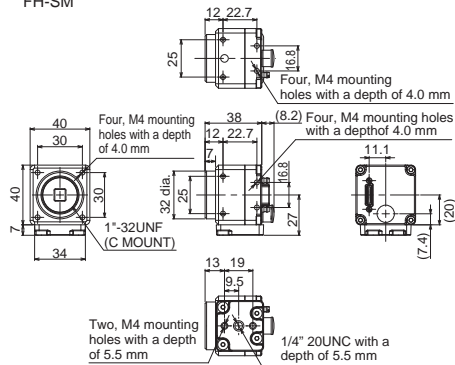


400,000-pixel camera

FH-SCX
FH-SMX

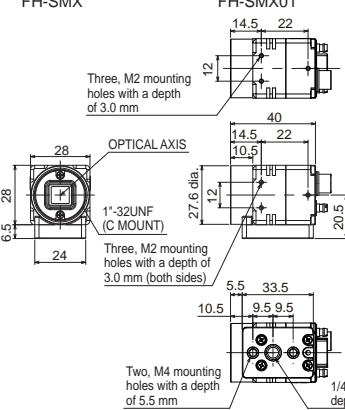


1.6 million-pixel camera

FH-SCX01
FH-SMX01

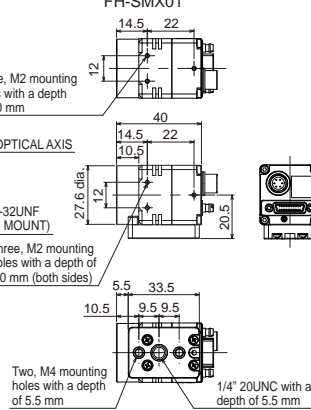


2 million-pixel camera

FH-SC02
FH-SM02

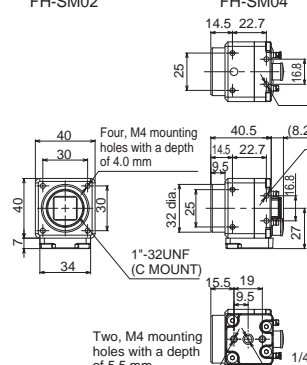


4 million-pixel camera

FH-SC04
FH-SM04

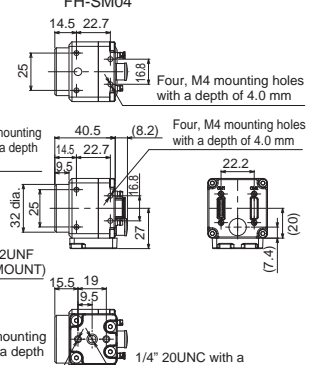


5 million-pixel camera

FH-SM05R
FH-SC05R

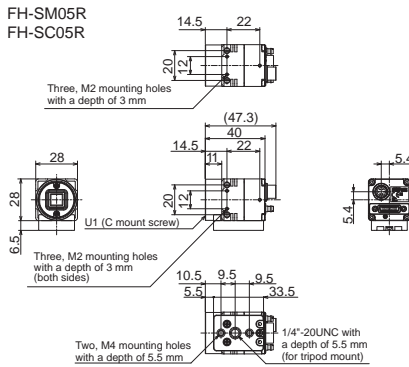


FZ-S5M3
FZ-SC5M3

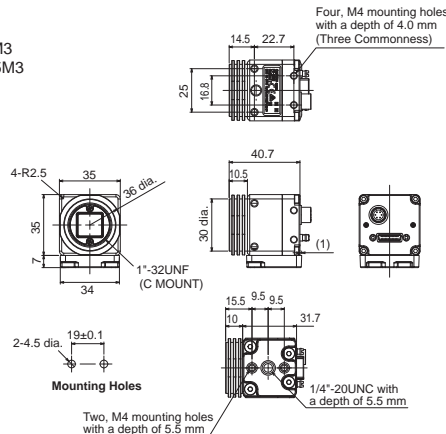


3.2 million-pixel camera

FH-SCX03
FH-SMX03

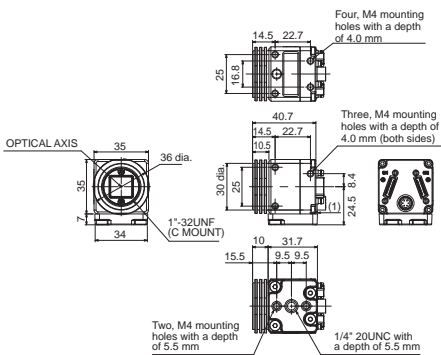


5 million-pixel camera

FH-SCX05
FH-SMX05

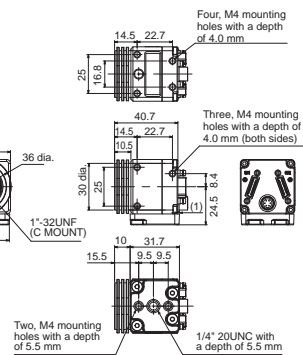


12 million-pixel camera

FH-SCX12
FH-SMX12

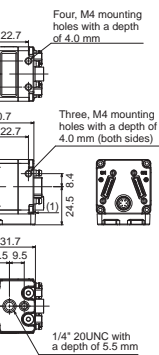


20.4 million-pixel camera

FH-SC21R
FH-SM21R



12 million-pixel camera


FH-SC12
FH-SM12

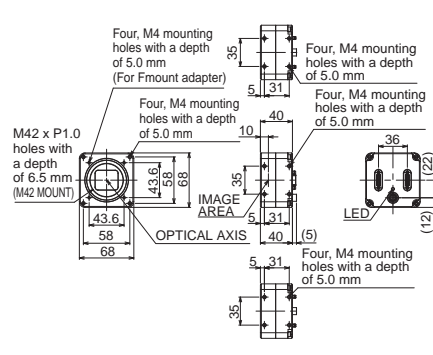

Digital CCD/CMOS Cameras


300,000-pixel camera

FZ-S
FZ-SC




2 million-pixel camera

FZ-S2M
FZ-SC2M



Shortwave Infrared (SWIR) Camera


330,000-pixel camera FH-SMX-SWIR
1.31 million-pixel camera FH-SMX01-SWIR

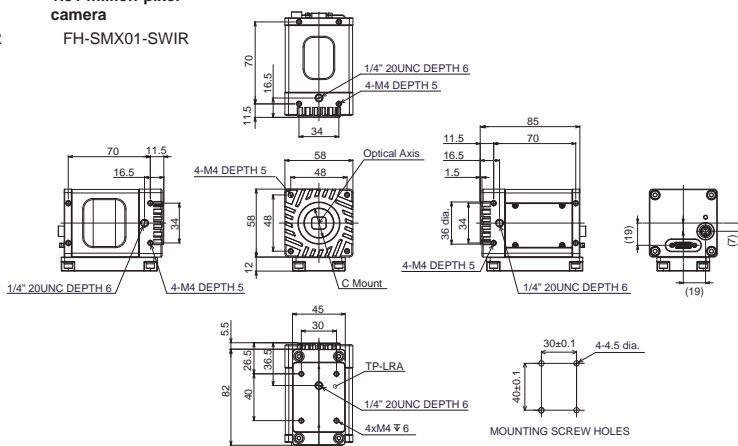

Small digital CCD cameras


Camera head

Flat camera FZ-SF
 Pen-shaped camera FZ-SP
 Pen-shaped camera FZ-SPC

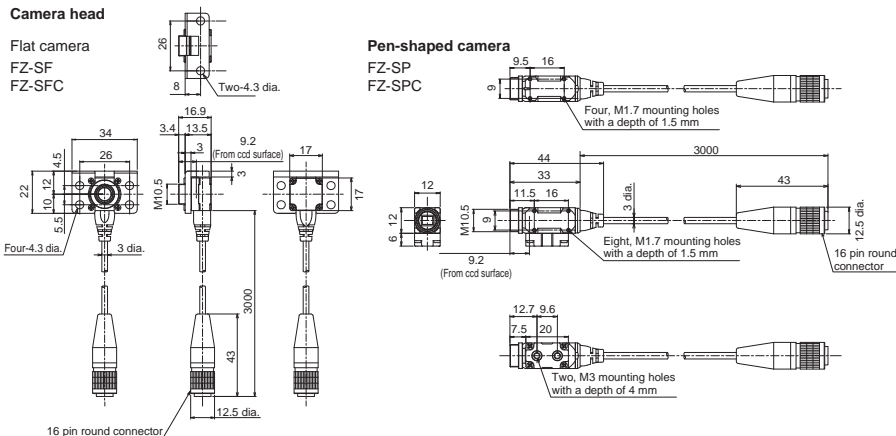

Camera amplifier


Can be used for both flat cameras and pen-shaped cameras

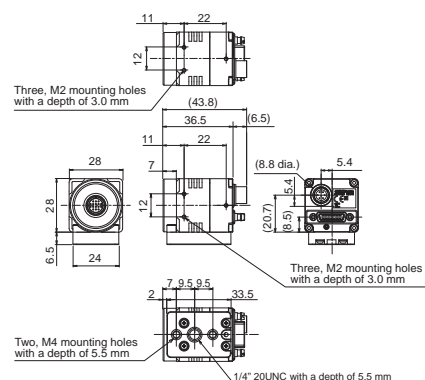

Intelligent Compact Digital CMOS Cameras

Narrow view / Standard


FZ-SQ010F
 FZ-SQ050F

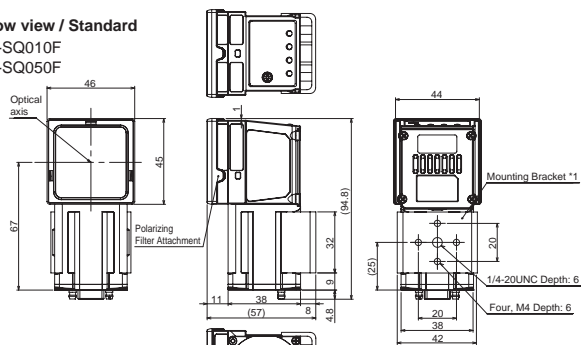



*1. The mounting brackets can be connected to either side.

Wide View

FZ-SQ100F (long-distance)
 FZ-SQ100N (short-distance)

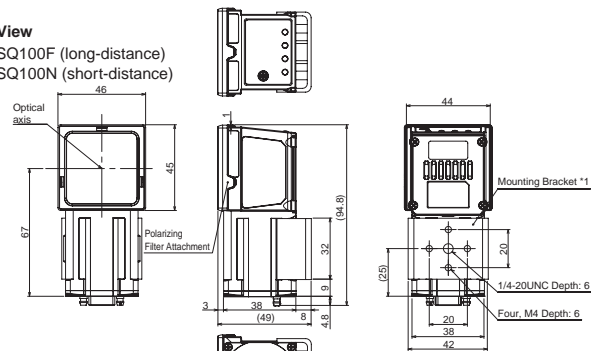


*1. The mounting brackets can be connected to either side.




Cables

Camera Cable


Camera Cable
FZ-VS3

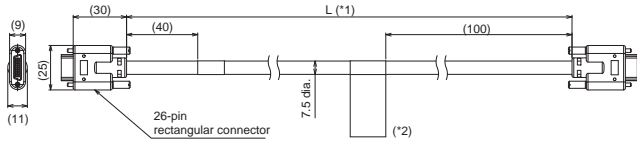


Bend resistant Camera Cable
FZ-VSB3

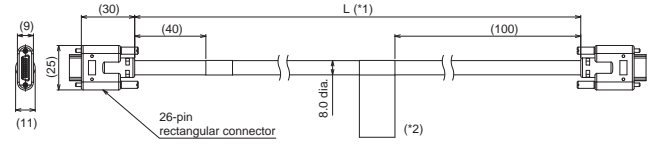


Super Bend resistant Camera Cable
FZ-VSBX

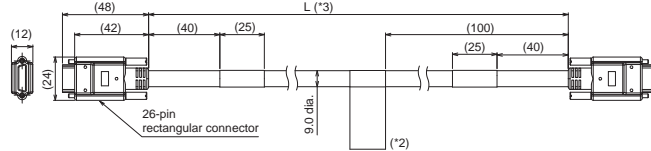


Right-angle Camera Cable
FZ-VSL3

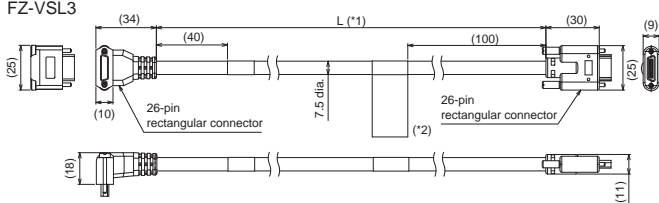


Bend resistant Right-angle Camera Cable
FZ-VSLB3

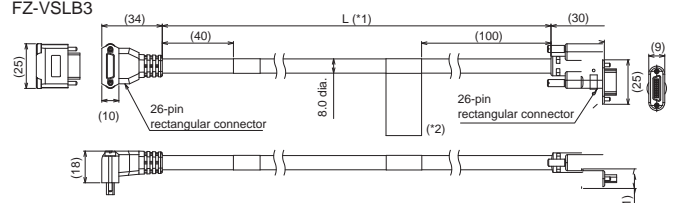

Long-distance Camera Cable
FZ-VS4

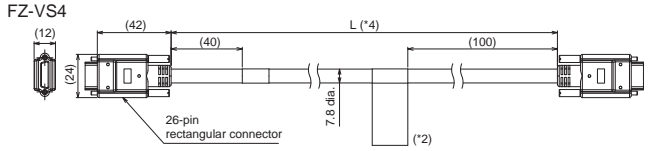

Long-distance Right-angle Camera Cable
FZ-VSL4

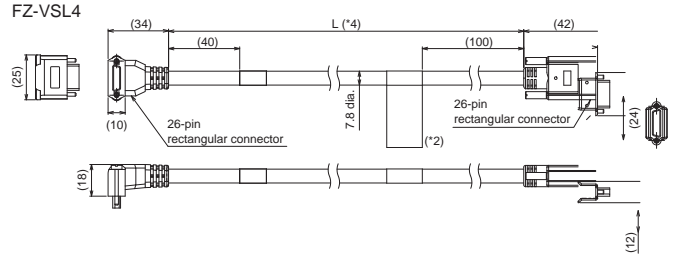

*1. Cable is available in 2m/3m/5m/10m.


*2. Each camera cables has polarity. Please ensure that the name plate side of the cable is connected to the controller.

*3. Cable is available in 5m/10m.

*4. Cable is available in 15m.


Camera Cable Extension Unit

FZ-VSJ

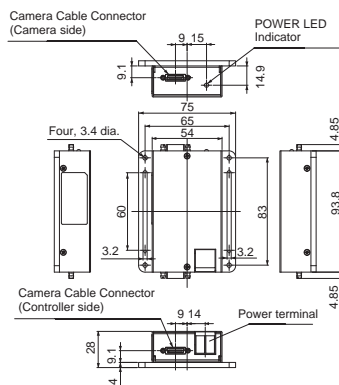


Extension Tubes for Small Camera

FZ-LESR



Lens for Small Camera


FZ-LES Series



* Overall length is available in 16.4mm/19.7mm/23.1mm/25.5mm.

Encoder Cable


FH-VR

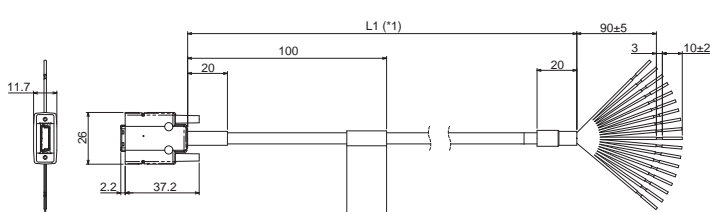

*1. Cable is available in 1.5 m.

Parallel I/O Cable


XW2Z-S013-□

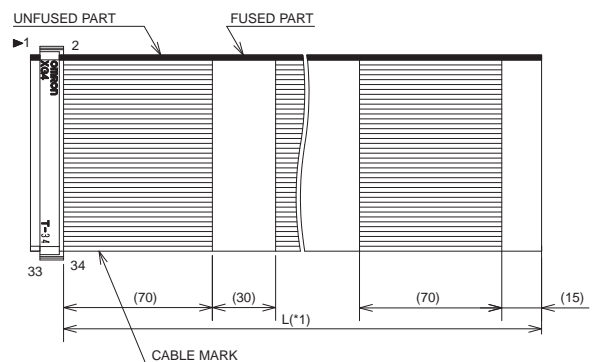

*1. Cable is available in 2m/5m.


Touch Panel Monitor

FH-MT12

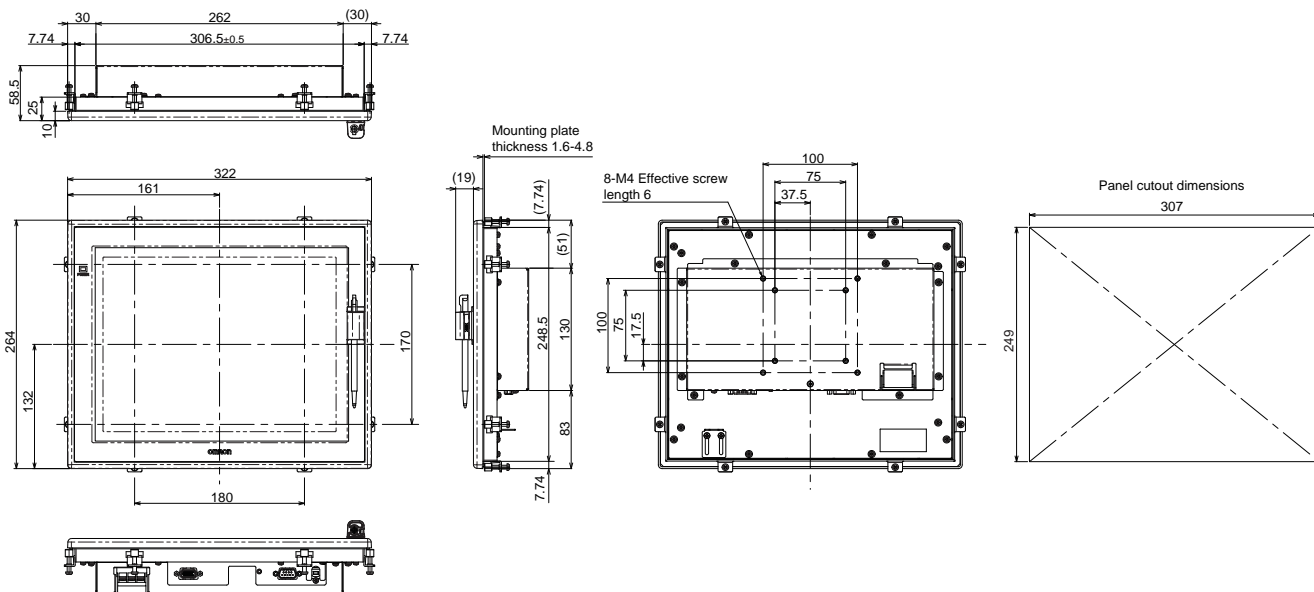


DVI-Analog Conversion Cable for Touch Panel Monitor/LCD Monitor

FH-VMDA

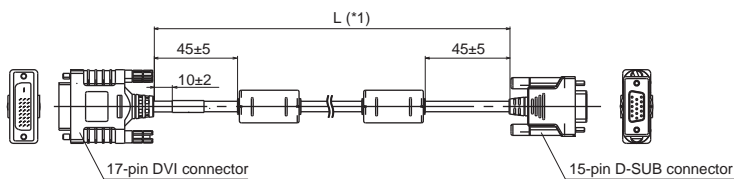


RS-232C Cable for Touch Panel Monitor

XW2Z-□□□PP-1

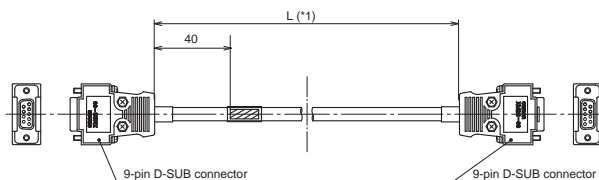

USB Cable for Touch Panel Monitor


FH-VUAB

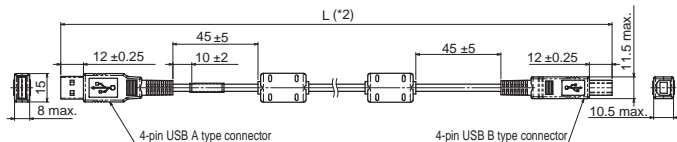

*1. Cable is available in 2m/5m/10m.
*2. Cable is available in 2m/5m.

LCD Monitor

FZ-M08

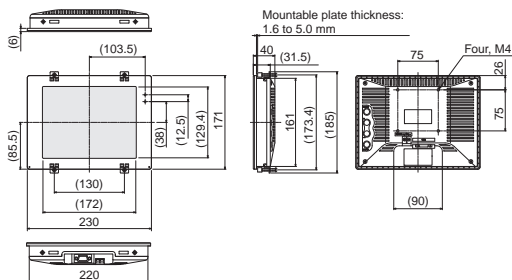


FH-Series

Optical Chart

Meaning of Optical Chart

The X axis of the optical chart shows the field of vision (mm) (*1), and the Y axis of the optical chart shows the camera installation distance (mm) (*2).

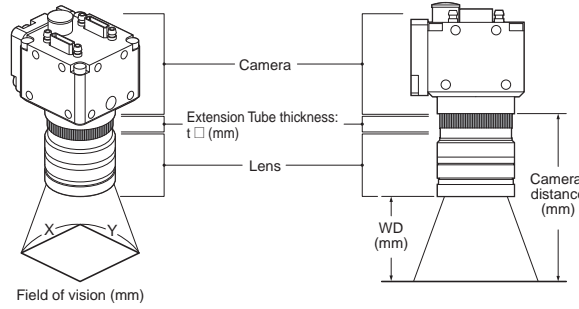


To select a lens, use the WEB Selector.
https://www.fa.omron.co.jp/lens_en


*1. The lengths of the fields of vision given in the optical charts are the lengths of the Y axis.
 *2. The vertical axis represents WD for small cameras.

Standard Lenses


High-speed Digital CMOS Camera FH-S□,
 Digital CCD Camera FZ-S□
 300,000-pixel (Using 3Z4S-LE SV-V Series)

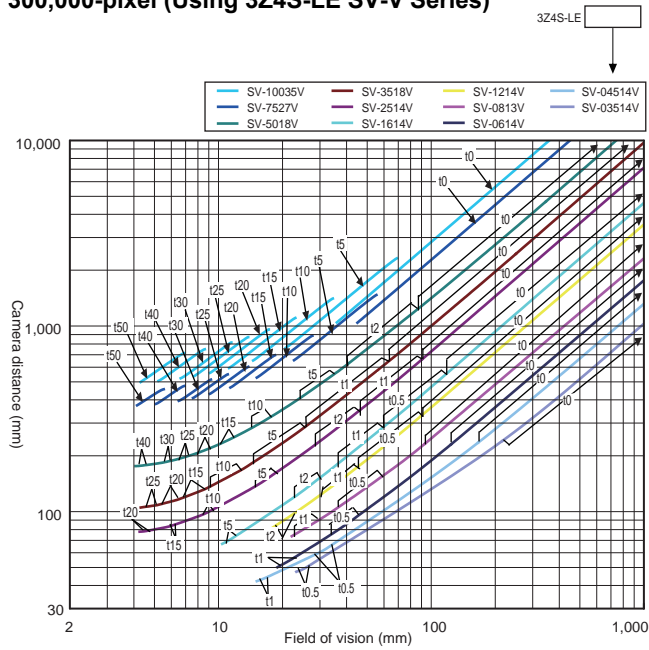


High-speed Digital CMOS Camera
 FH-S□X
 400,000-pixel
 (Using 3Z4S-LE SV-V Series)

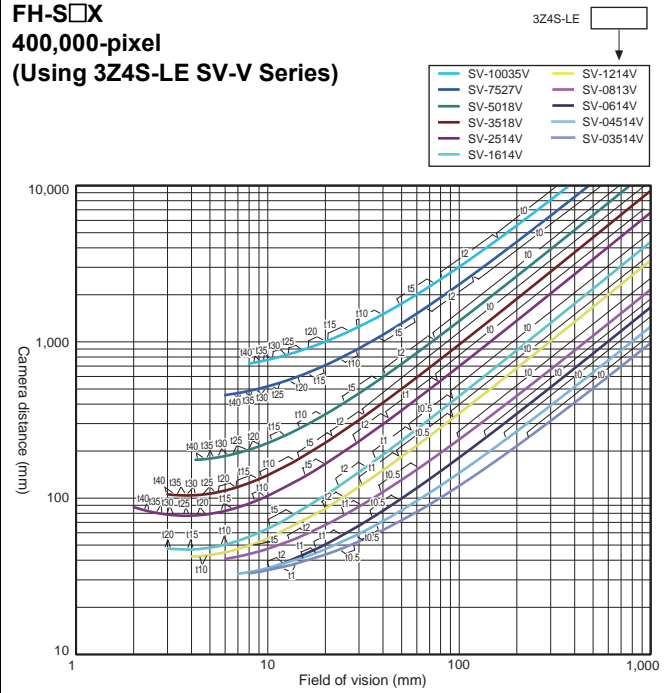

Digital CCD Camera
 FZ-S□2M
 2 million-pixel
 (Using 3Z4S-LE SV-H Series)

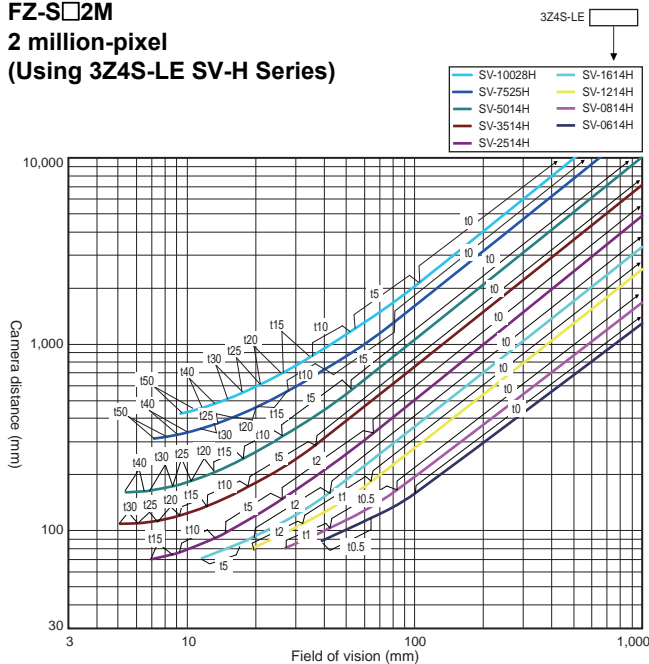


Digital CMOS Camera FZ-S□5M3,
 High-speed Digital CMOS Camera
 FH-S□X05
 5 million-pixel
 (Using 3Z4S-LE SV-H Series)

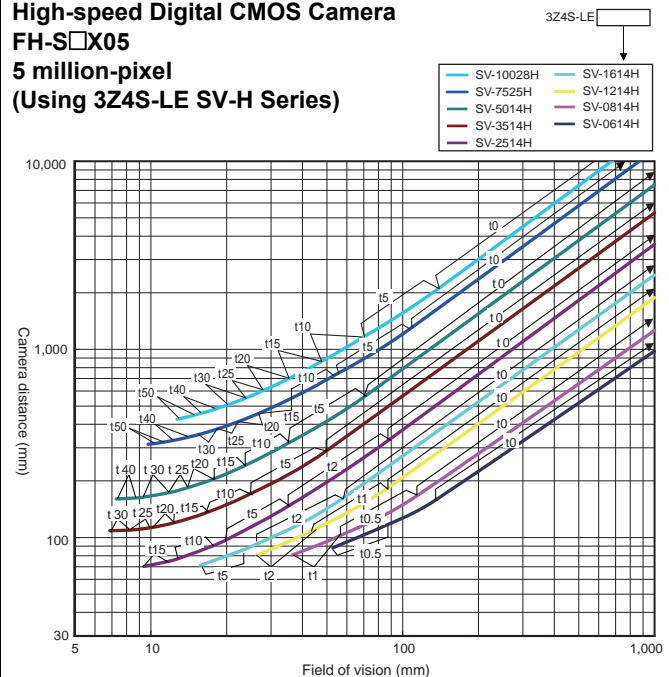

Digital CMOS Camera
FH-S□05R
5 million-pixel
(Using 3Z4S-LE SV-H Series)

3Z4S-LE 


- | | |
|-----------|----------|
| SV-10028H | SV-1614H |
| SV-7525H | SV-1214H |
| SV-5014H | SV-0814H |
| SV-3514H | SV-0614H |
| SV-2514H | |

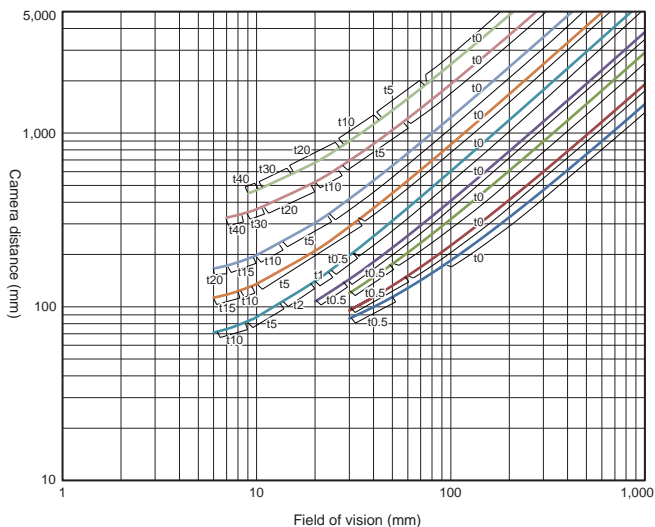

High-speed Digital CMOS Camera
FH-S□X01
1.6 million-pixel
(Using 3Z4S-LE SV-H Series)

3Z4S-LE 


- | | |
|-----------|----------|
| SV-10028H | SV-1614H |
| SV-7525H | SV-1214H |
| SV-5014H | SV-0814H |
| SV-3514H | SV-0614H |
| SV-2514H | |

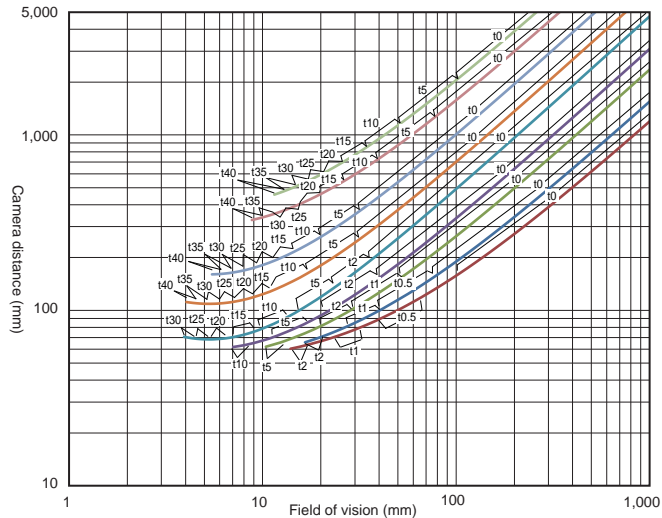

High-speed Digital CMOS Camera
FH-S□X03
3.2 million-pixel
(Using 3Z4S-LE SV-H Series)

3Z4S-LE 


- | | |
|-----------|----------|
| SV-10028H | SV-1614H |
| SV-7525H | SV-1214H |
| SV-5014H | SV-0814H |
| SV-3514H | SV-0614H |
| SV-2514H | |

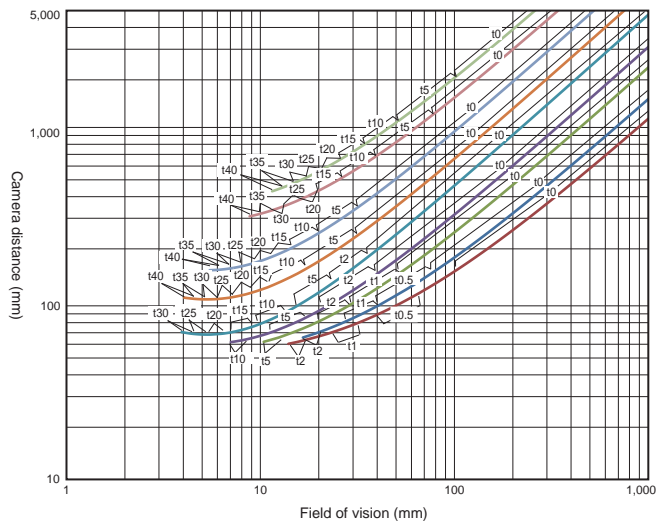

High-speed Digital CMOS Camera
FH-S□02
2 million-pixel
(Using 3Z4S-LE SV-H/VS-H1 Series)

3Z4S-LE 


- | | |
|-----------|------------|
| SV-10028H | VS-1614H1N |
| SV-7525H | VS-1214H1 |
| VS-5018H1 | VS-0814H1 |
| VS-3514H1 | VS-0618H1 |
| VS-2514H1 | |

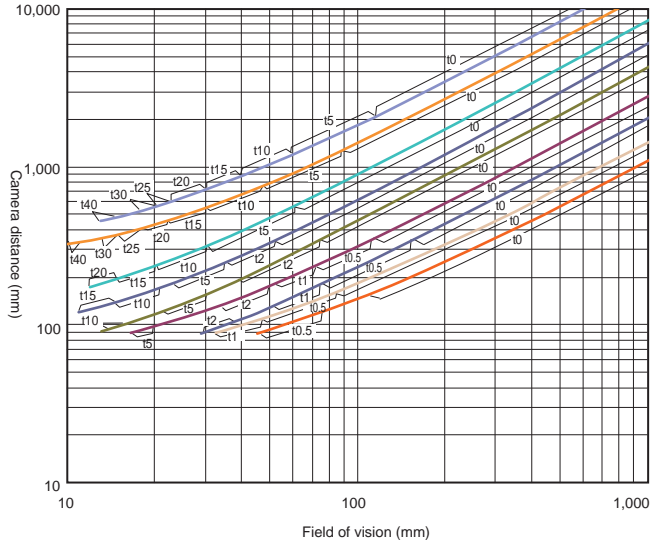

High-speed Digital CMOS Camera FH-S□04 4 million-pixel (Using 3Z4S-LE SV-H/VS-H1 Series)

3Z4S-LE


- SV-10028H
- SV-7525H
- VS-5018H1
- VS-3514H1
- VS-2514H1
- VS-1614H1N
- VS-1214H1
- VS-0814H1
- VS-0618H1

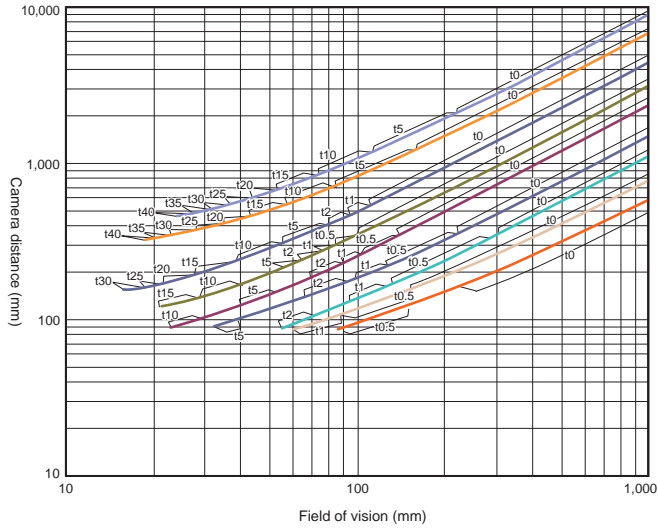

High-speed Digital CMOS Camera FH-S□12 12 million-pixel (Using 3Z4S-LE VS-L/M42-10 Series)

3Z4S-LE

- VS-L10028/M42-10
- VS-L8540/M42-10
- VS-L5028/M42-10
- VS-L3528/M42-10
- VS-L2526/M42-10
- VS-L1828/M42-10

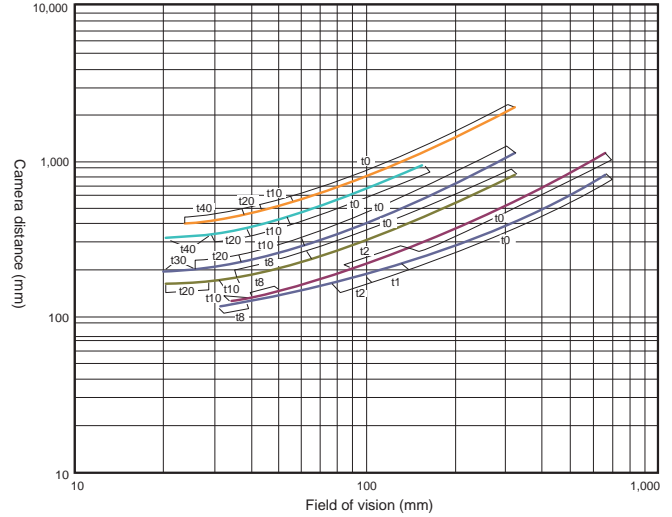


High-speed Digital CMOS Camera FH-S□X12 12 million-pixel (Using 3Z4S-LE VS-HVA Series)

3Z4S-LE

- VS-HVA1226
- VS-HVA1626
- VS-HVA2524
- VS-HVA3522
- VS-HVA5024

Note: The 3Z4S-LE VS-HVA Series cannot be used with an extension tube.

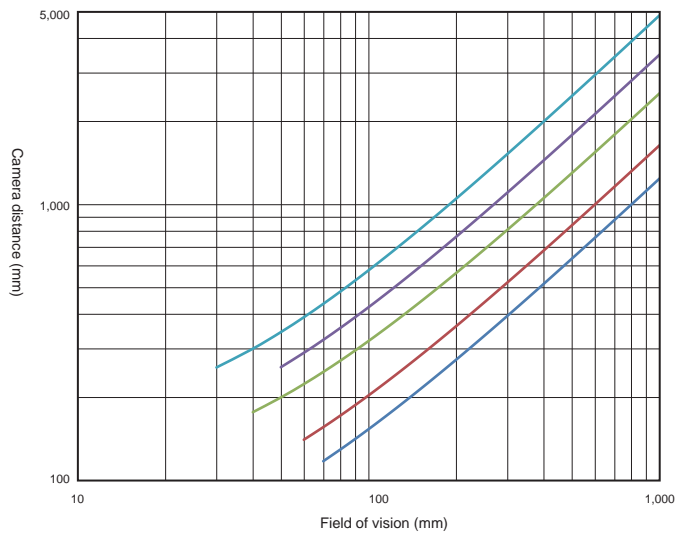


Digital CMOS Camera FH-S□21R 20.4 million-pixel (Using 3Z4S-LE VS-HVA Series)

3Z4S-LE


- VS-HVA1226
- VS-HVA1626
- VS-HVA2524
- VS-HVA3522
- VS-HVA5024

Note: The 3Z4S-LE VS-HVA Series cannot be used with an extension tube.

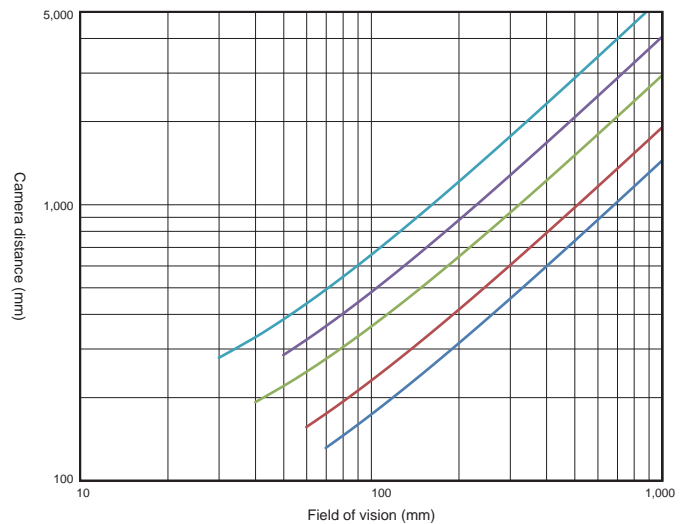


High-speed Digital CMOS Camera
FH-S□X12
12 million-pixel
(Using 3Z4S-LE VS-LLD Series)

Note: The 3Z4S-LE VS-LLD Series cannot be used with an extension tube.

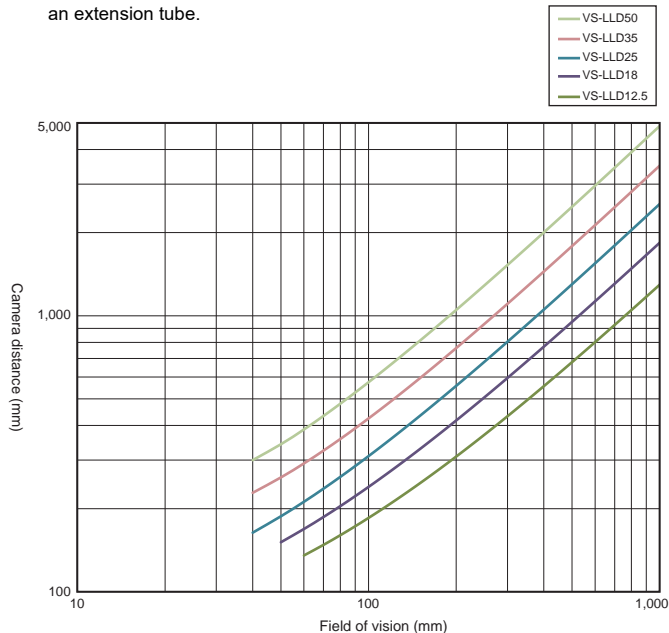


Digital CMOS Camera
FH-S□21R
20.4 million-pixel
(Using 3Z4S-LE VS-LLD Series)

Note: The 3Z4S-LE VS-LLD Series cannot be used with an extension tube.

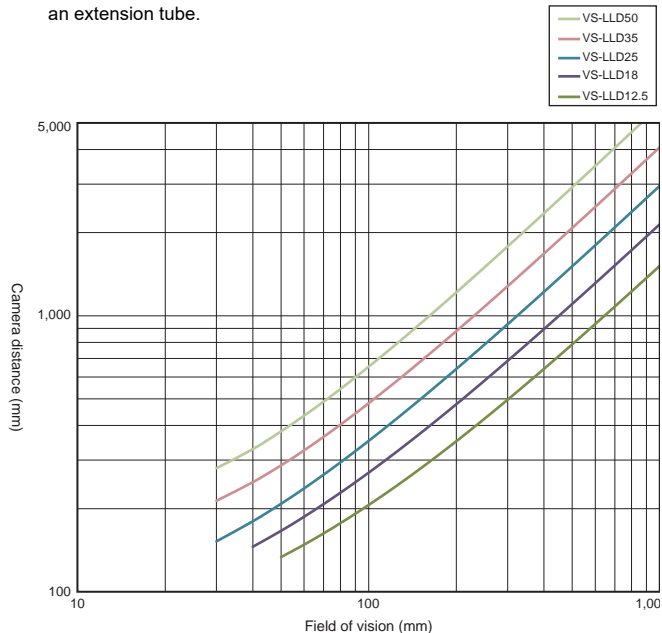

Small Digital CCD Cameras
FZ-SF□,
FZ-SP□
300,000-pixel
(Using FZ-LES Series)

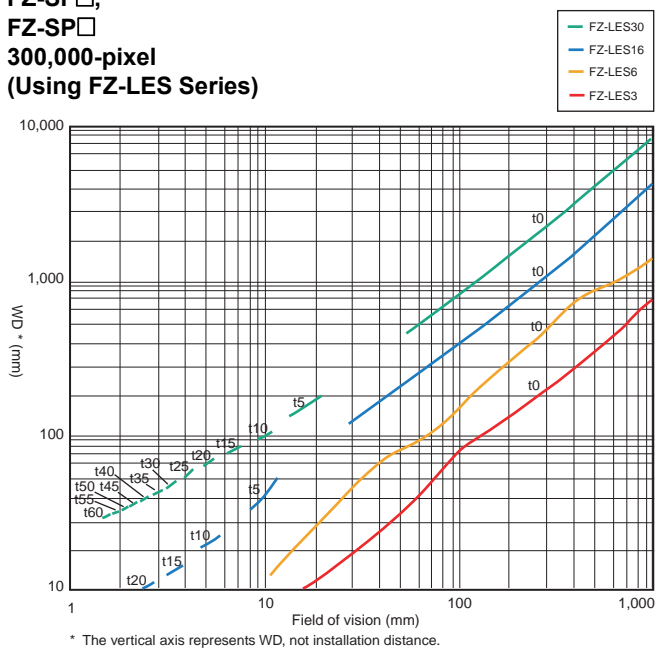

* The vertical axis represents WD, not installation distance.

Vibrations and Shocks Resistant Lenses

High-speed Digital CMOS Camera

FH-S□,

Digital CCD Camera


FZ-S□

300,000-pixel

(Using 3Z4S-LE VS-MCA Series)

3Z4S-LE □

- VS-MCA75
- VS-MCA50
- VS-MCA35
- VS-MCA30
- VS-MCA25
- VS-MCA20
- VS-MCA15

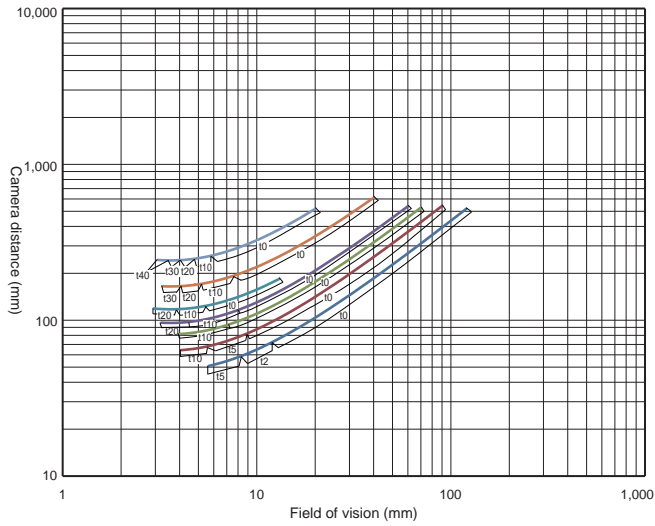

High-speed Digital CMOS Camera

FH-S□X

400,000-pixel

High-speed Digital CMOS Camera


FH-S□X01

1.6 million-pixel

(Using 3Z4S-LE VS-MCA Series)

3Z4S-LE □

- VS-MCA75
- VS-MCA50
- VS-MCA35
- VS-MCA30
- VS-MCA25
- VS-MCA20
- VS-MCA15

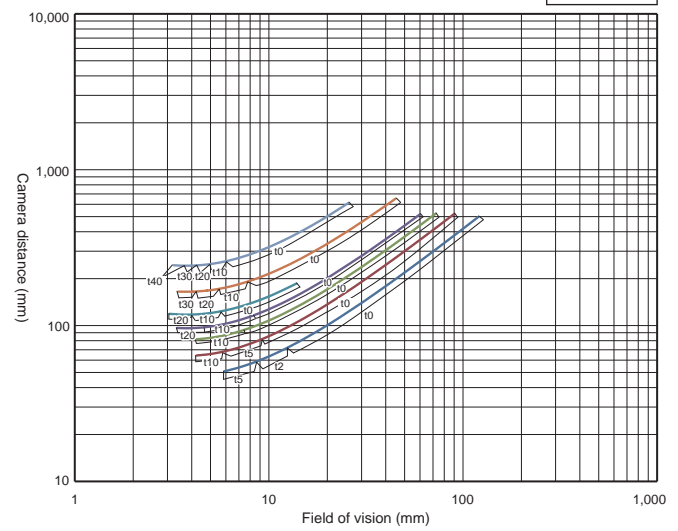

Digital CCD Camera


FZ-S□2M

2 million-pixel

(Using 3Z4S-LE VS-MCA Series)

3Z4S-LE □

- VS-MCA75
- VS-MCA50
- VS-MCA35
- VS-MCA30
- VS-MCA25
- VS-MCA20
- VS-MCA15

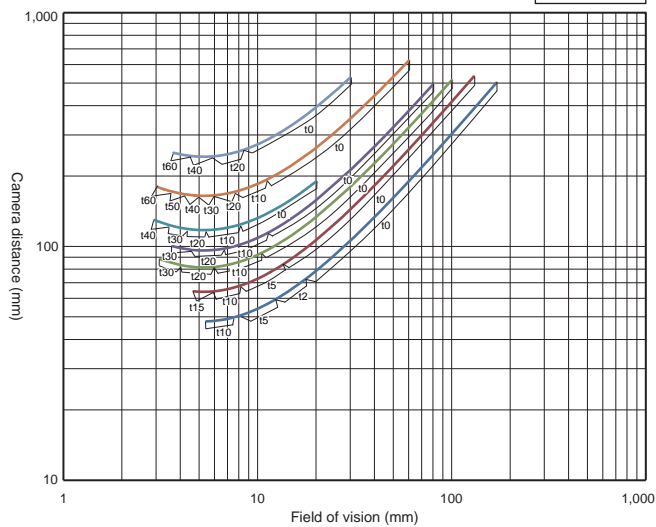

High-speed Digital CMOS Camera


FH-S□X03

3.2 million-pixel


(Using 3Z4S-LE VS-MCA Series)

3Z4S-LE □


- VS-MCA75
- VS-MCA50
- VS-MCA35
- VS-MCA30
- VS-MCA25
- VS-MCA20
- VS-MCA15

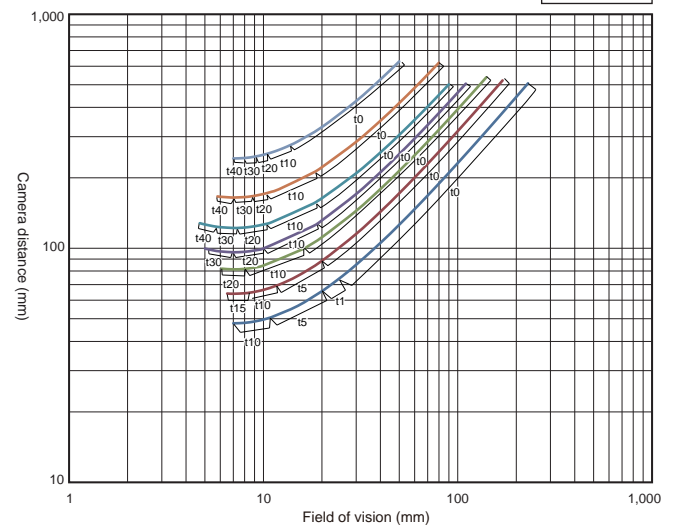


**Digital CMOS Camera FZ-S□5M3,
High-speed Digital CMOS Camera FH-S□X05
5 million-pixel
(Using 3Z4S-LE VS-MCA Series)**

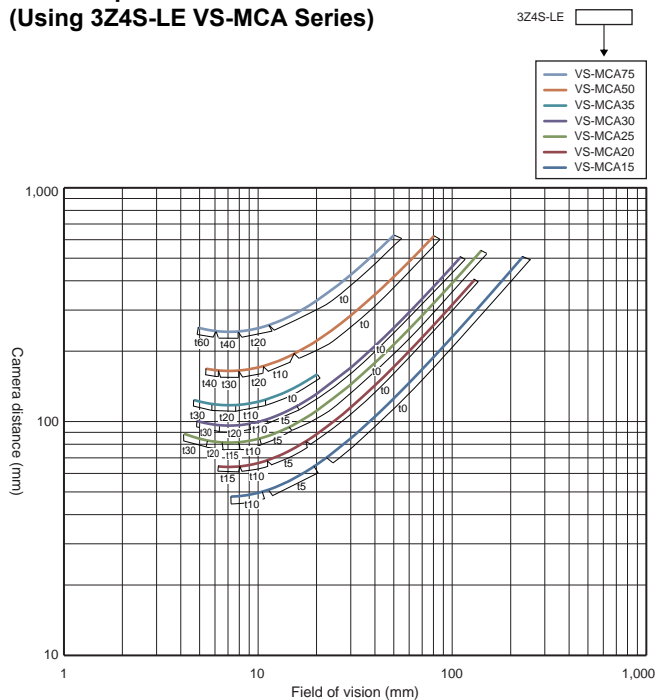


**Digital CMOS Camera
FH-S□05R
5 million-pixel
(Using 3Z4S-LE VS-MCA Series)**

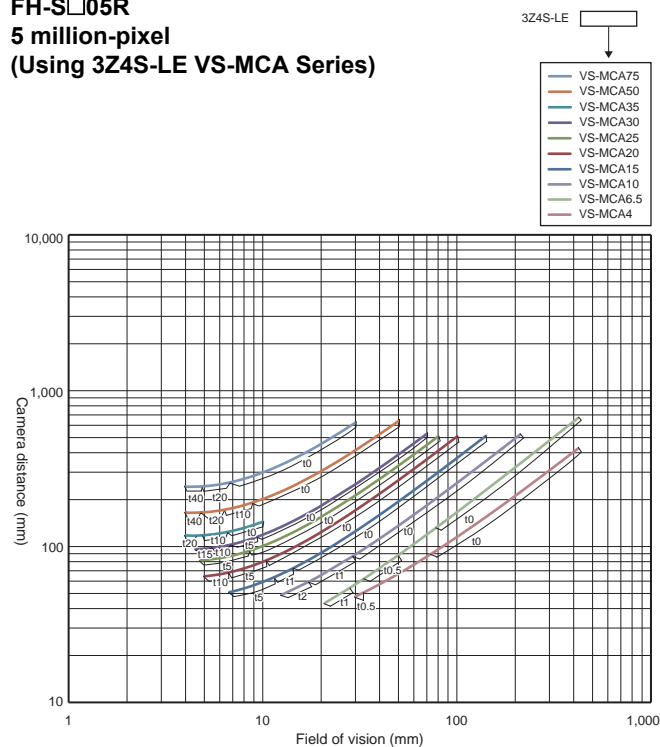

**High-speed Digital CMOS Camera
FH-S□02
2 million-pixel
(Using 3Z4S-LE VS-MCH1 Series)**

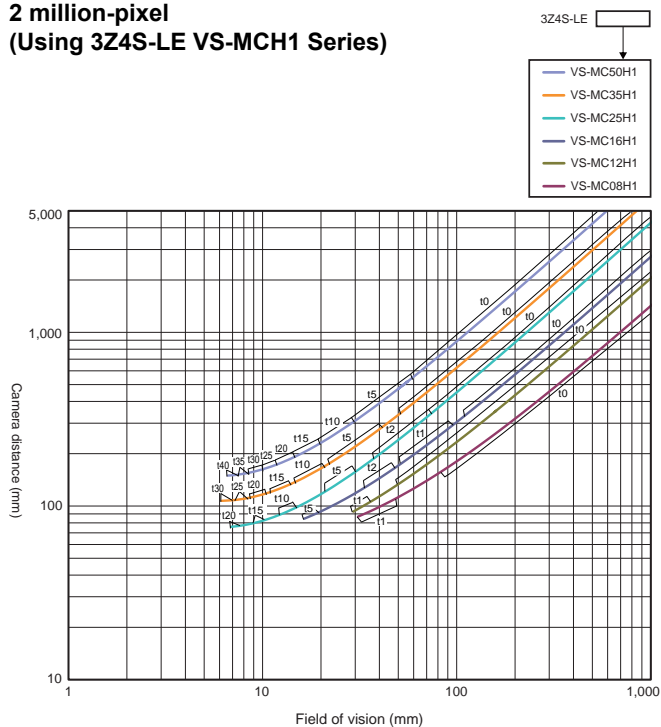


**High-speed Digital CMOS Camera
FH-S□04
4 million-pixel
(Using 3Z4S-LE VS-MCH1 Series)**

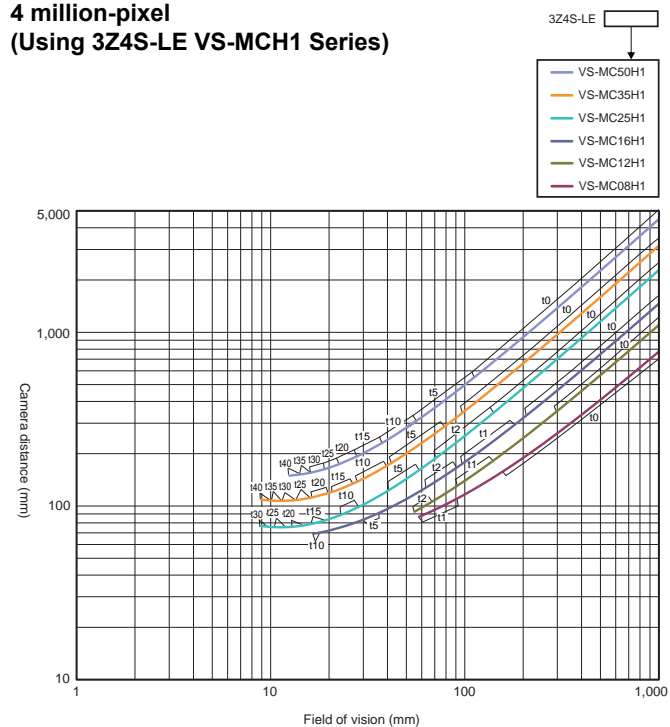

Digital CMOS Camera
FH-S□21R
20.4 million-pixel
(Using 3Z4S-LE VS-MCH1 Series)

3Z4S-LE


- VS-MC50H1
- VS-MC35H1
- VS-MC25H1
- VS-MC16H1
- VS-MC12H1
- VS-MC08H1

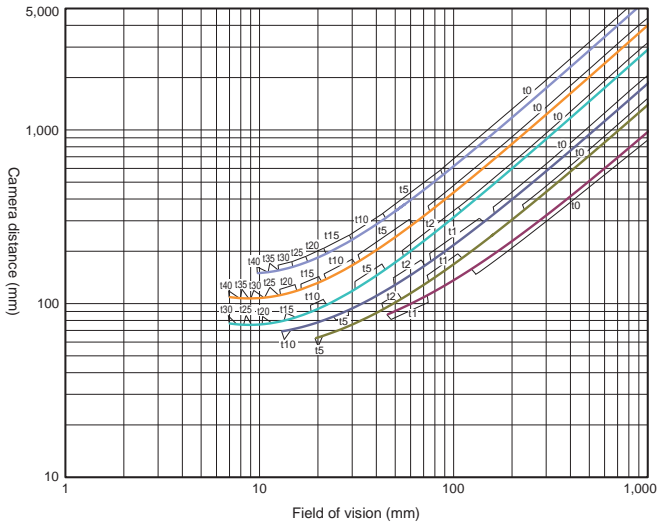

High-speed Digital CMOS Camera
FH-S□12
12 million-pixel
(Using 3Z4S-LE VS-MCL/M42-10 Series)

3Z4S-LE

- VS-MCL100/M42-10
- VS-MCL85/M42-10
- VS-MCL50/M42-10
- VS-MCL35/M42-10
- VS-MCL25/M42-10
- VS-MCL18/M42-10

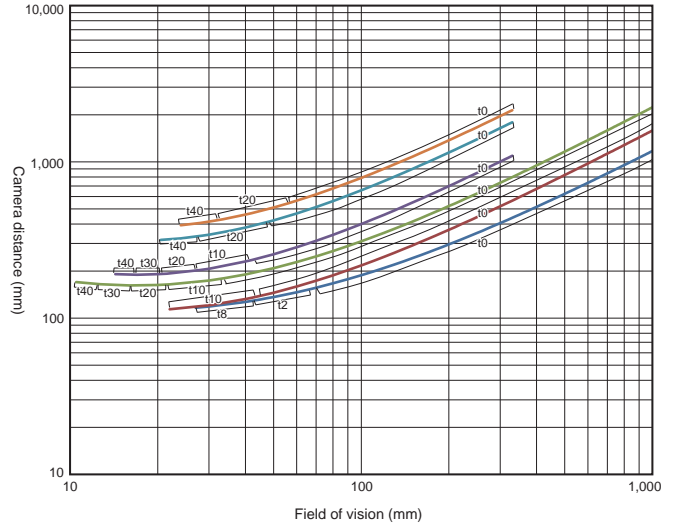

Related Manuals

| Man.No. | Model number | Manual |
|---------|--------------|---|
| Z365 | FH/FHV7 | Vision System FH/FHV7 Series User's Manual |
| Z341 | FH/FHV7 | Vision System FH/FHV7 series Processing Item Function Reference Manual |
| Z342 | FH/FHV7 | Vision System FH/FHV7 Series User's Manual for Communications Settings |
| Z343 | FH/FHV7 | Vision System FH/FHV7 Series Operation Manual for Sysmac Studio |
| Z366 | FH | Vision System FH series Hardware Setup Manual |
| Z367 | FH | Vision System FH series Macro Customize Functions Programming Manual |
| Z437 | FH-UMAI | FH Application Software FH-UMAI Processing Item Function Reference Manual |
| Z438 | FH-UMAI | FH Application Software FH-UMAI Version Update Tool Operating Manual |

- Sysmac is a trademark or registered trademark of OMRON Corporation in Japan and other countries for OMRON factory automation products.
- Think&See is a trademark or registered trademark of OMRON Corporation in Japan and other countries.
- EtherCAT® is a registered trademark and patented technology, licensed by Beckhoff Automation GmbH, Germany.
- EtherNet/IP® is a trademark of ODVA.
- Microsoft® Visual Studio® and Windows are either registered trademarks or trademarks of Microsoft Corporation in the United States and/or other countries.
- QR code is the registered trademark of DENSO WAVE.
- Intel and the Intel logo are trademarks of Intel Corporation in the U.S. and/or other countries.
- Other company names and product names in this document are the trademarks or registered trademarks of their respective companies.
- The product photographs and figures that are used in this catalog may vary somewhat from the actual products.
- The SD Logo is a trademark of SD-3C LLC.
- Microsoft product screen shot(s) reprinted with permission from Microsoft Corporation.
- The permission of Shutterstock.com was received for images that were used.

MEMO

Terms and Conditions Agreement

Read and understand this catalog.

Please read and understand this catalog before purchasing the products. Please consult your OMRON representative if you have any questions or comments.

Warranties.

- (a) Exclusive Warranty. Omron's exclusive warranty is that the Products will be free from defects in materials and workmanship for a period of twelve months from the date of sale by Omron (or such other period expressed in writing by Omron). Omron disclaims all other warranties, express or implied.
- (b) Limitations. OMRON MAKES NO WARRANTY OR REPRESENTATION, EXPRESS OR IMPLIED, ABOUT NON-INFRINGEMENT, MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE OF THE PRODUCTS. BUYER ACKNOWLEDGES THAT IT ALONE HAS DETERMINED THAT THE PRODUCTS WILL SUITABLY MEET THE REQUIREMENTS OF THEIR INTENDED USE.

Omron further disclaims all warranties and responsibility of any type for claims or expenses based on infringement by the Products or otherwise of any intellectual property right. (c) Buyer Remedy. Omron's sole obligation hereunder shall be, at Omron's election, to (i) replace (in the form originally shipped with Buyer responsible for labor charges for removal or replacement thereof) the non-complying Product, (ii) repair the non-complying Product, or (iii) repay or credit Buyer an amount equal to the purchase price of the non-complying Product; provided that in no event shall Omron be responsible for warranty, repair, indemnity or any other claims or expenses regarding the Products unless Omron's analysis confirms that the Products were properly handled, stored, installed and maintained and not subject to contamination, abuse, misuse or inappropriate modification. Return of any Products by Buyer must be approved in writing by Omron before shipment. Omron Companies shall not be liable for the suitability or unsuitability or the results from the use of Products in combination with any electrical or electronic components, circuits, system assemblies or any other materials or substances or environments. Any advice, recommendations or information given orally or in writing, are not to be construed as an amendment or addition to the above warranty.

See <http://www.omron.com/global/> or contact your Omron representative for published information.

Limitation on Liability; Etc.

OMRON COMPANIES SHALL NOT BE LIABLE FOR SPECIAL, INDIRECT, INCIDENTAL, OR CONSEQUENTIAL DAMAGES, LOSS OF PROFITS OR PRODUCTION OR COMMERCIAL LOSS IN ANY WAY CONNECTED WITH THE PRODUCTS, WHETHER SUCH CLAIM IS BASED IN CONTRACT, WARRANTY, NEGLIGENCE OR STRICT LIABILITY.

Further, in no event shall liability of Omron Companies exceed the individual price of the Product on which liability is asserted.

Suitability of Use.

Omron Companies shall not be responsible for conformity with any standards, codes or regulations which apply to the combination of the Product in the Buyer's application or use of the Product. At Buyer's request, Omron will provide applicable third party certification documents identifying ratings and limitations of use which apply to the Product. This information by itself is not sufficient for a complete determination of the suitability of the Product in combination with the end product, machine, system, or other application or use. Buyer shall be solely responsible for determining appropriateness of the particular Product with respect to Buyer's application, product or system. Buyer shall take application responsibility in all cases.

NEVER USE THE PRODUCT FOR AN APPLICATION INVOLVING SERIOUS RISK TO LIFE OR PROPERTY OR IN LARGE QUANTITIES WITHOUT ENSURING THAT THE SYSTEM AS A WHOLE HAS BEEN DESIGNED TO ADDRESS THE RISKS, AND THAT THE OMRON PRODUCT(S) IS PROPERLY RATED AND INSTALLED FOR THE INTENDED USE WITHIN THE OVERALL EQUIPMENT OR SYSTEM.

Programmable Products.

Omron Companies shall not be responsible for the user's programming of a programmable Product, or any consequence thereof.

Performance Data.

Data presented in Omron Company websites, catalogs and other materials is provided as a guide for the user in determining suitability and does not constitute a warranty. It may represent the result of Omron's test conditions, and the user must correlate it to actual application requirements. Actual performance is subject to the Omron's Warranty and Limitations of Liability.

Change in Specifications.

Product specifications and accessories may be changed at any time based on improvements and other reasons. It is our practice to change part numbers when published ratings or features are changed, or when significant construction changes are made. However, some specifications of the Product may be changed without any notice. When in doubt, special part numbers may be assigned to fix or establish key specifications for your application. Please consult with your Omron's representative at any time to confirm actual specifications of purchased Product.

Errors and Omissions.

Information presented by Omron Companies has been checked and is believed to be accurate; however, no responsibility is assumed for clerical, typographical or proofreading errors or omissions.

Note: Do not use this document to operate the Unit.

OMRON Corporation Industrial Automation Company

Kyoto, JAPAN

Contact : www.ia.omron.com

Regional Headquarters

OMRON EUROPE B.V.

Wegalaan 67-69, 2132 JD Hoofddorp
The Netherlands
Tel: (31) 2356-81-300 Fax: (31) 2356-81-388

OMRON ELECTRONICS LLC

2895 Greenspoint Parkway, Suite 200
Hoffman Estates, IL 60169 U.S.A.
Tel: (1) 847-843-7900 Fax: (1) 847-843-7787

OMRON ASIA PACIFIC PTE. LTD.

438B Alexandra Road, #08-01/02 Alexandra
Technopark, Singapore 119968
Tel: (65) 6835-3011 Fax: (65) 6835-3011

OMRON (CHINA) CO., LTD.

Room 2211, Bank of China Tower,
200 Yin Cheng Zhong Road,
PuDong New Area, Shanghai, 200120, China
Tel: (86) 21-6023-0333 Fax: (86) 21-5037-2388

Authorized Distributor:

©OMRON Corporation 2018-2025 All Rights Reserved.
In the interest of product improvement,
specifications are subject to change without notice.

CSM_28_3

Cat. No. Q197-E1-28 0125 (1118)