

NJ/NX-series Machine Automation Controller CPU Unit






Reliable, secure, easy -International standard communication protocol

Reliable

IEC communication protocol for Industrie 4.0 and PackML

OPC UA is an industrial communication protocol that enables data exchange between products from different manufacturers and across operating systems. This international standard (IEC 62541) is integrated with the IEC 61131-3 PLC programming standard. OPC UA is listed as a recommendation for the communication technology in RAMI 4.0 (Reference Architecture Model Industrie 4.0) and also serves as a basis for the packaging standard PackML (ANSI/ISA-TR88)* and the standard for exchange of data between injection molding machines (EUROMAP 77). The adoption of this open standard for manufacturing machines is increasing worldwide. In such circumstances, Omron added an OPC UA server interface to the



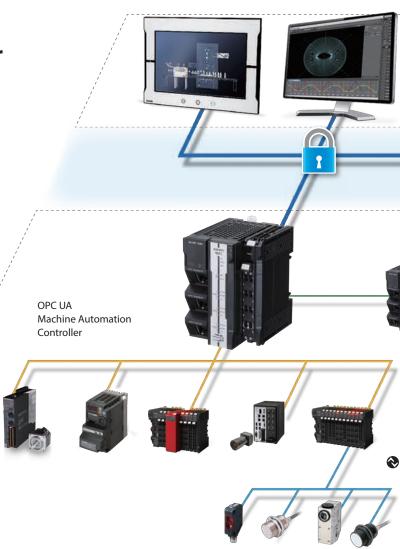

Secure

Authentication and encryption technologies

Security is a crucial issue for connection between industrial automation systems and the host IT system, remote access maintenance, and use of the internet. OPC UA security is based on recognized standards that are also used for secure communication in the internet and satisfies the three security requirements: confidentiality, integrity, and availability. Integrity by digitally signing the messages and confidentiality by encrypting the messages ensure secure connection between automation systems and IT systems.



OPC UA directly connects automation and IT



Easy


Simple connection to host system

A gateway computer is required to connect a traditional PLC to the host system. The user must register variables, allocate memory to them, and convert complex data.

Omron's OPC UA CPU Unit eliminates the need for a computer.

Just select variables to directly connect the controller to the host system, without complex data conversion.

In addition, Omron's products support OPC UA companion specifications for IEC 61131-3 and PackML, contributing to facilitating standardization of machines.

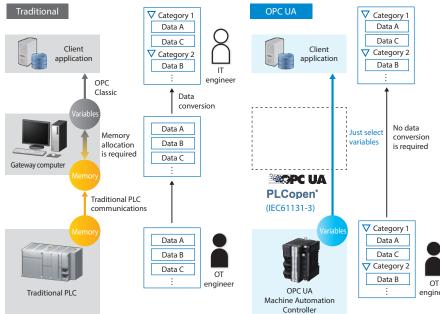

What is OPC UA (OPC Unified Architecture)?

- An interoperability standard for the secure and reliable exchange of data in the industrial automation space and in other industries
- An OS and hardware independent service-oriented architecture
- •Secure connection between higher-level systems like MES or ERP and automation systems at production floor Omron is contributing to the distribution of the OPC technology since OPC Foundation was established. OPC Foundation https://opcfoundation.org/

*What is PackML (ANSI/ISA-TR88)?

PackML (Packaging Machine Language) developed by OMAC (Organization for Machine Automation and Control) is a standard for packaging machines that defines mode and state of devices and interface with host devices. In September 2016, it was announced that OMAC, PLCopen and OPC Foundation would work together to promote this standard. (OPC 30050 - UA Companion Specification for PackML version)

Omron offers the SYSMAC-XR101 OPC UA PackML Library and SYSMAC-XR012 Packaging Machine Library that support the companion specification for PackML and include Function Blocks and sample programs, helping you implement PackML.

Ordering Information

CPU Units

	Specifications			
Product name	Program capacity	Memory capacity for variables	Motion control axes	Model
NX701 CPU Unit		4 MB: Retain attributes 256 MB: No Retain attributes	256	NX701-1700
4	80 MB		128	NX701-1600
NX701 Database Connection CPU Unit	SO MB	4 MB: Retain attributes 256 MB: No Retain attributes (including Memory for CJ-series Units)	256	NX701-1720
			128	NX701-1620
NX502 CPU Unit	80 MB	4 MB: Retain attributes 256 MB: No Retain attributes	256	NX502-1700
			128	NX502-1600
			64	NX502-1500
			32	NX502-1400
			16	NX502-1300
NX102 CPU Unit NX102 Database Connection CPU Unit	5 MB	1.5 MB: Retain attributes 32 MB: No Retain attributes	8	NX102-1200
			4	NX102-1100
			2	NX102-1000
			0	NX102-9000
			8	NX102-1220
			4	NX102-1120
			2	NX102-1020
			0	NX102-9020
NJ501 CPU Unit	20 MB	2 MB: Retain attributes 4 MB: No Retain attributes	64	NJ501-1500
			32	NJ501-1400
			16	NJ501-1300

Note: 1. Refer to the OMRON website (www.ia.omron.com) or ask your OMRON representative for details.

Collection of software functional components Sysmac Library

Please download it from following URL and install to Sysmac Studio. https://www.ia.omron.com/sysmac_library/

Product name	Specifications	Model
OPC UA PackML Library	This Library is a collection of software functional objects for using the OPC UA as the communications protocol for PackML in accordance with the OPC UA PackML specifications.	SYSMAC-XR101

Sysmac is a trademark or registered trademark of OMRON Corporation in Japan and other countries for OMRON factory automation products.

OPC, OPC UA, and OPC Certified logo are trademarks of the OPC Foundation.

EtherCAT® is a registered trademark of Beckhoff Automation GmbH for their patented technology.

EtherNet/IPTM and DeviceNetTM are trademarks of ODVA.

Other company names and product names in this document are the trademarks or registered trademarks of there respective companies.

Note: Do not use this document to operate the Unit.

OMRON Corporation Industrial Automation Company

Kyoto, JAPAN Contact: www.ia.omron.com

Regional Headquarters

OMRON EUROPE B.V.

Wegalaan 67-69, 2132 JD Hoofddorp The Netherlands Tel: (31) 2356-81-300 Fax: (31) 2356-81-388

OMRON ASIA PACIFIC PTE. LTD.

438B Alexandra Road, #08-01/02 Alexandra Technopark, Singapore 119968 Tel: (65) 6835-3011 Fax: (65) 6835-3011 OMRON ELECTRONICS LLC

2895 Greenspoint Parkway, Suite 200 Hoffman Estates, IL 60169 U.S.A. Tel: (1) 847-843-7900 Fax: (1) 847-843-7787

OMRON (CHINA) CO., LTD.

Room 2211, Bank of China Tower, 200 Yin Cheng Zhong Road, PuDong New Area, Shanghai, 200120, China Tel: (86) 21-6023-0333 Fax: (86) 21-5037-2388 **Authorized Distributor:**

©OMRON Corporation 2017-2024 All Rights Reserved. In the interest of product improvement, specifications are subject to change without notice.

CSM 5 3

Cat. No. P123-E1-08 1224 (1217)